

Code:	Project:	Type:
	Notes:	


KAO KIT B LED SUSPENSION

Design Bruno Houssin

#CAT	model	config.	finish	certification	out put	voltage	CCT	driver
USC-M	119	2	—	8	H	00	—	—

Quantity
—

model	119 = KAO Suspension
configuration	2 = B
finish	1 = Black 2 = White
certification	8 = UL
output	H = High output (1 x 20W + 1 x 40W LED)
voltage	00 = UNV (120-277V)
CCT	LA = 3000K LB = 3500K
driver	TV = Dim 0-10V (on/off included)

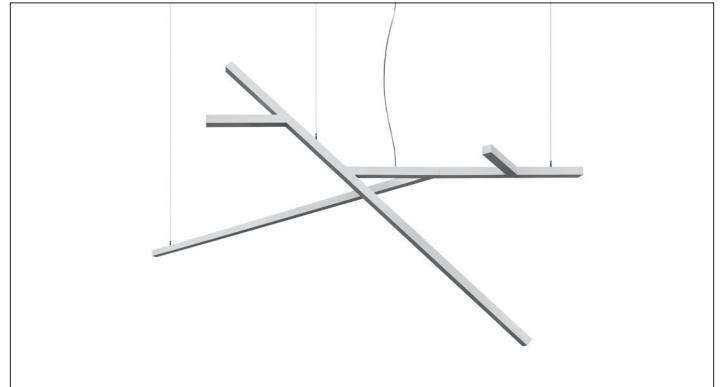

LAMPING:

Power input : 1 x 20W + 1 x 40W (60W total)

Lumen output : 2586lm

Efficacy : 43lm/W*

LM79 : Not available yet

*Informations calculated for 3500K

FEATURES:



Construction: Extruded aluminum body. 1 9/16" x 1 9/16" (40 x 40 mm) square section modules.

Diffuser: Dust protection cover in polycarbonate.

Notes: Electrical connections via quick connectors. Each structure is composed of pre-assembled and pre-wired sub units, supplied with a drilling template for placing the ceiling fixing points. Supplied with 20' of quick - adjustment steel cable.


Weight: Not available yet

Certification: eUL_{us} - suitable for dry locations

Classification: IP20  

PHOTOMETRIC DATA:

Photometric curve (cd):
LED 1 x 20W



Photometric curve (cd):
LED 1 x 40W

