

# Reeds single floor IP67

T087408

## SPECIFICATIONS



### Design By

Klaus Begasse

### Collection

Outdoor



### Specifications

Delivered lumens	79lm
Light output ratio	8.78lm/W
Power consumption	9W
Led type	7X8.5W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	On/Off
Input Voltage	120V
Driver	TCI - 1 x DCC-15W-350MA/US
BUG Rating	B0-U3-G0

### Colors & Finishes

- Transparent (Rods)
- Anthracite grey (Base)


### Materials

- 7 transparent rods in PMMA
- Base made of a polycarbonate casing installed between 2 aluminum plates and anti-scratch support feet
- Gasket made in silicone

### Features & Accessories

- Water sealing is assured by a gasket
- Fixture can be fastened to floor by means of holes in the lower plate
- Complete with integrated driver
- Supplied with a 4'11"-long H05RN-F 2x1 cable
- Standard non dimmable

### Dimensions

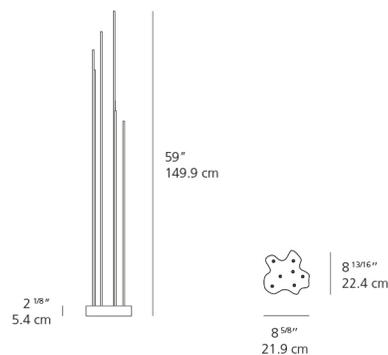

### Packaging

2 Boxes

1 x 15-7/16" x 15-7/16" x 8-5/16" / 6.17 lbs - 39 cm x 39 cm x 20.8 cm / 2.8 kg


1 x 61-1/8" x 2-1/4" x 2-1/4" / 1.96 lbs - 155 cm x 5.5 cm x 5.5 cm / .89 kg

### Light distribution

Indirect

### Luminaire weight

5.58 lbs / 2.53 kg



### Warranty

5 year limited warranty

Red = Max Cd. Through Vertical plane  
Blue = Max Cd. Through Horizontal plane

last updated: 2021-03-05

We reserve the right to change specifications of our products.  
For the latest product information please visit [www.artemide.net](http://www.artemide.net)