



UPBEL060

Design by Manuel Vivian

Collection consisting of ceiling lamps and suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: CEILING

Ratings

- E26 or 2GX11 or GU24 LED
- Diffused light
- Surface installation over holes
- Power supply 120V AC
- Switch mode: on-off
- Steel frame


GU24 LED VERSION

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut

Product code composition

BELL / diffuser INCLUDED

Type	Article	Colours	Finish	Source
UP	BEL 060 E26	BC white	XX	E26 2 x Max 17W LED or 2 x Max 20W fluo (see details on page 2)
	BEL 060 FLE	BL electric blue		FLE 2GX13 1x55W - 120VAC
	BEL 060 LED	BW warm white		LED GU24 2x15W - included 120VAC - CRI80 diffused beam - 2700K 3200 lm - 107 lm/W
		GI gold yellow		
		MA brown		
		MT brick red		
		NE black		
		RB burgundy		
		RS red		
		VE green		



example composition code | **UP** | **BEL060FLE** | **GI** | **XX**

Available colors



UPBEL060_ _ _ _ XX

CUSTOMER _____

NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com



UPBEL090

Design by Manuel Vivian

Collection consisting of ceiling lamps and suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: CEILING

Ratings

- E26 or 2GX11 or GU24 LED
- Diffused light
- Surface installation over holes
- Power supply 120V AC
- Switch mode: on-off
- Steel frame


GU24 LED VERSION

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut

Product code composition

BELL / diffuser NOT INCLUDED

Type	Article	Colours	Finish	Source
UP	BEL 090 E26	BC white	XX	E26 3 x Max 17W LED or 3 x Max 26W fluo
	BEL 090 FLE	BL electric blue		FLE 2GX11 4x24W - 120Vac
	BEL 090 LED	BW warm white		LED GU24 3x15W - included 120Vac - CRI80 diffused beam - 2700K 4800 lm - 107 lm/W
		GI gold yellow		
		MA brown		
		MT brick red		
		NE black		
		RB burgundy		
		RS red		
		VE green		

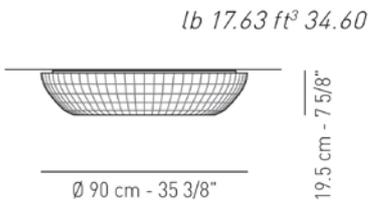

DRY LOCATION

example composition code | UP | BEL090E26 | BW | XX

Available colors



BC White **BL** Electric blue **BW** Warm white **GI** Gold yellow **MA** Brown **MT** Brick red **NE** Black **RB** Burgundy **RS** Red **VE** Green

UPBEL090_ _ _ _ XX

CUSTOMER _____

NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com



UPBEL118
Design by Manuel Vivian

Collection consisting of ceiling lamps and suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: CEILING

Ratings

- E26 or 2GX11 or GU24 LED
- Diffused light
- Surface installation over holes
- Power supply 120V AC
- Switch mode: on-off
- Steel frame


GU24 LED VERSION

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut

Product code composition

BELL / diffuser NOT INCLUDED

Type	Article	Colours	Finish	Source
UP	BEL 118 E26	BC white	XX	E26 4 x Max 17W LED or 4 x Max 26W fluo
	BEL 118 FLE	BL electric blue		FLE 2GX11 4x36W - 120Vac
	BEL 118 LED	BW warm white		LED GU24 4x15W - included 120Vac - CRI80 diffused beam - 2700K 6400 lm - 107 lm/W
	GI gold yellow			
	MA brown			
	MT brick red			
		NE black		
		RB burgundy		
		RS red		
		VE green		

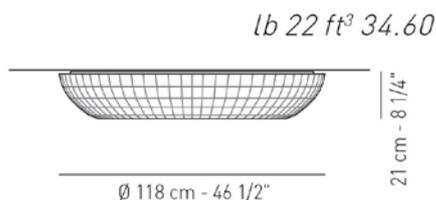

example composition code |UP |BEL118E26 |BW |XX

Available colors



UPBEL118_ _ _ _ _XX

CUSTOMER _____

NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level.
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.





UPBEL180
Design by Manuel Vivian

Collection consisting of ceiling lamps and suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: CEILING

Ratings

- E26 or 2GX11 or GU24 LED
- Diffused light
- Surface installation over holes
- Power supply 120V AC
- Switch mode: on-off
- Steel frame


GU24 LED VERSION

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut

Product code composition

BELL / diffuser NOT INCLUDED

Type	Article	Colours	Finish	Source
UP	BEL 180 E26	BC white	XX	E26 5 x Max 17W LED or 5 x Max 26W fluo
	BEL 180 FLE	BL electric blue		FLE 2GX11 4x55W - 120Vac
	BEL 180 LED	BW warm white		LED GU24 5x15W - included 120Vac - CRI80 diffused beam - 2700K 8000 lm - 107 lm/W LED
	GI gold yellow			
	MA brown			
	MT brick red			
	NE black			
	RB burgundy			
	RS red			
	VE green			

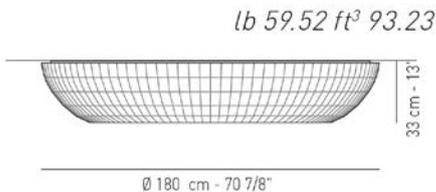

example composition code | UP | **BEL180E26** | BW | XX

Available colors



UPBEL180_ _ _ _ XX

CUSTOMER _____

NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level.
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.

