



**USBEL045**

Design by Manuel Vivian

Collection consisting of suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: SUSPENDED

**Ratings**

- E26 or GX24q-4 or GU24 LED
- Diffused light
- Installs over 4 in. octagonal J-box
- Power supply 120V AC
- Switch mode: on-off
- Steel frame


**GU24 LED VERSION**

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut

Product code composition

**BELL / diffuser NOT INCLUDED**

Type	Article	Colours	Finish	Source
US	<b>BEL 045 E26</b>	<b>BC</b> white	<b>XX</b>	E26 1 x Max 17W LED or 1 x Max 26W fluo
	<b>BEL 045 FLE</b>	<b>BL</b> electric blue		FLE GX24q-4 1x42W - 120Vac
	<b>BEL 045 LED</b>	<b>BW</b> warm white		LED GU24 1x15W - included 120Vac - CRI80 diffused beam - 2700K 1600 lm - 107 lm/W <b>LED</b>
		<b>GI</b> gold yellow		
		<b>MA</b> brown		
		<b>MT</b> brick red		
		<b>NE</b> black		
		<b>RB</b> burgundy		
		<b>RS</b> red		
		<b>VE</b> green		

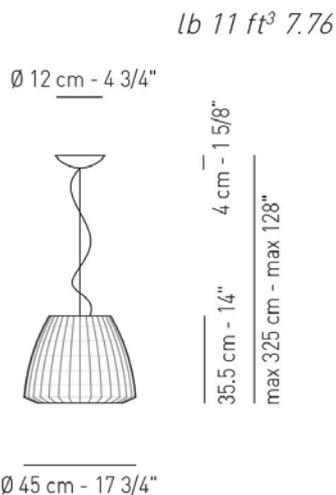

example composition code | US | BEL045E26 | GI | XX

Available colors



**BC** White    **BL** Electric blue    **BW** Warm white    **GI** Gold yellow    **MA** Brown    **MT** Brick red    **NE** Black    **RB** Burgundy    **RS** Red    **VE** Green

USBEL045\_ \_ \_ \_ \_XX

CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305  
404.876.1064 sales@illumco.com



**USBEL060**

Design by Manuel Vivian

Collection consisting of suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: SUSPENDED

**Ratings**

- E26 or GX24q-4 or GU24 LED
- Diffused light
- Installs over 4 in. octagonal J-box
- Power supply 120V AC
- Switch mode: on-off
- Steel frame

**GU24 LED VERSION**

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut

Product code composition


**BELL / diffuser NOT INCLUDED**

Type	Article	Colours	Finish	Source
US	<b>BEL 060 E26</b>	<b>BC</b> white	<b>XX</b>	E26 1 x Max 17W LED or 1 x Max 26W fluo
	<b>BEL 060 FLE</b>	<b>BL</b> electric blue		FLE GX24q-4 1x42W - 120Vac
	<b>BEL 060 LED</b>	<b>BW</b> warm white		LED GU24 1x15W - included 120Vac - CRI80 diffused beam - 2700K 1600 lm - 107 lm/W
		<b>GI</b> gold yellow		
		<b>MA</b> brown		
		<b>MT</b> brick red		
		<b>NE</b> black		
		<b>RB</b> burgundy		
		<b>RS</b> red		
		<b>VE</b> green		



lb 16.53 ft<sup>3</sup> 15.18

Ø 15 cm - 5 7/8"



5 cm - 2"

38 cm - 15"  
max 325 cm - max 128"

Ø 60 cm - 23 5/8"



DRY LOCATION

example composition code | US | BEL060E26 | GI | XX

Available colors



**BC** White    **BL** Electric blue    **BW** Warm white    **GI** Gold yellow    **MA** Brown    **MT** Brick red    **NE** Black    **RB** Burgundy    **RS** Red    **VE** Green

USBEL060\_ \_ \_ \_ \_XX

CUSTOMER \_\_\_\_\_

NOTES \_\_\_\_\_

Luminous flux for all built-in LED luminaires is shown at source level.

Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the



425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305  
404.876.1064    sales@illumco.com



**USBEL090**  
Design by Manuel Vivian

Collection consisting of suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: SUSPENDED

**Ratings**

- Downlight and uplight
- Installs over 4 in. octagonal J-box
- Power supply 120V AC
- Switch mode: on-off
- Steel frame
- Opalescent diffuser

**L10 BUILT IN LED**

- MODULE VERSION**
- CCT 3000 K, CRI 90
  - Power supply 120/277V AC
  - Dimmable ELV 0-10V


**GU24 LED VERSION**

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut

Product code composition

**BELL** / diffuser INCLUDED, with upward and downward lighting

Type	Article	Colours	Finish	Source
US	<b>BEL 090 E26</b>	<b>BC</b> white	<b>XX</b>	E26 4 x Max 17W LED or 4 x Max 26W fluo
	<b>BEL 090 FLE</b>	<b>BL</b> electric blue		FLE GX24q-4 4x42W 120/277VAc
	<b>BEL 090 LED</b>	<b>BW</b> warm white		LED GU24 4x15W - included 120VAc - CR180 diffused beam - 2700K 6400 lm - 107 lm/W - dimmable ELV TRAILING EDGE PHASE CUT + <b>LED</b>
		<b>GI</b> gold yellow		
	<b>BEL 090 L10</b>	<b>MA</b> brown		L10 95W LED - integrated 120/277VAc - CR190 diffused beam - 3000K 10700 lm - 113 lm/W - dimmable ELV 0-10V + <b>LED</b>
		<b>MT</b> brick red		
		<b>NE</b> black		
		<b>RB</b> burgundy		
		<b>RS</b> red		
		<b>VE</b> green		

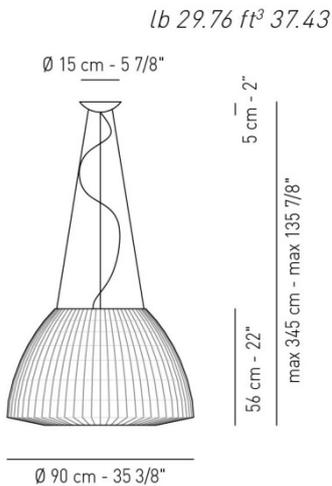

example composition code | **US** | **BEL090LED** | **BL** | **XX**

Available colors



**BC** White    **BL** Electric blue    **BW** Warm white    **GI** Gold yellow    **MA** Brown    **MT** Brick red    **NE** Black    **RB** Burgundy    **RS** Red    **VE** Green

USBEL090\_ \_ \_ \_ \_XX

CUSTOMER \_\_\_\_\_

NOTES \_\_\_\_\_

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

225 Peachtree Hills Ave. NE #3 Atlanta, GA 30305  
404.876.1064    sales@illumco.com



**USBEL118**  
Design by Manuel Vivian

Collection consisting of suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: SUSPENDED

**Ratings**

- Downlight and uplight
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120V AC
- Switch mode: on-off
- Steel frame
- Opalescent diffuser

**L10 BUILT IN LED MODULE VERSION**

- CCT 3000 K, CRI 90
- Power supply 120/277V AC
- Dimmable ELV 0-10V


**GU24 LED VERSION**

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut

Product code composition

**BELL** / diffuser INCLUDED, with upward and downward lighting

Type	Article	Colours	Finish	Source
US	BEL 118 E26	BC white	XX	E26 4 x Max 17W LED or 4 x Max 26W fluo
	BEL 118 FLE	BL electric blue		FLE GX24q-4 4x42W 120/277VAC
	BEL 118 LED	BW warm white GI gold yellow		LED GU24 4x15W - included 120VAC - CRI80 diffused beam - 2700K 6400 lm - 107 lm/W - + dimmable ELV TRAILING EDGE PHASE CUT LED
	BEL 118 L10	MA brown MT brick red NE black RB burgundy RS red VE green		L10 95W LED - integrated 120/277VAC - CRI90 diffused beam - 3000K 10700 lm - 113 lm/W - + dimmable ELV 0-10V LED

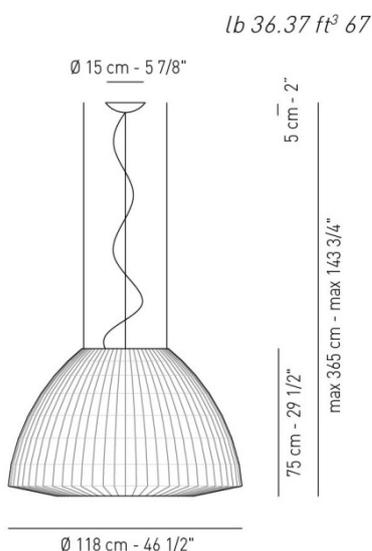

example composition code | US | BEL118L10 | VE | XX

Available colors



BC White    BL Electric blue    BW Warm white    GI Gold yellow    MA Brown    MT Brick red    NE Black    RB Burgundy    RS Red    VE Green

USBEL118 \_ \_ \_ \_ XX    CUSTOMER \_\_\_\_\_    NOTES \_\_\_\_\_

NOTICE: Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305  
404.876.1064    sales@illumco.com



**USBEL180**  
Design by Manuel Vivian

Collection consisting of suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: SUSPENDED

**Ratings**

- Downlight and uplight
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120V AC
- Switch mode: on-off
- Steel frame
- Opalescent diffuser

**L10 BUILT IN LED MODULE VERSION**

- CCT 3000 K, CRI 90
- Power supply 120/277V AC
- Dimmable ELV 0-10V

**FLE VERSION**


- Power supply 120/277V AC

**GU24 LED VERSION**

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut

Product code composition

**BELL** / diffuser INCLUDED, with upward and downward lighting

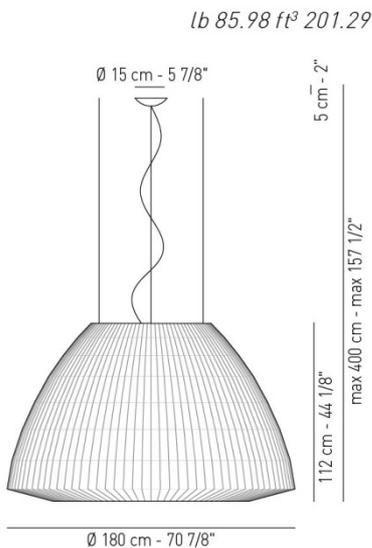

Type	Article	Colours	Finish	Source
US	BEL 180 E26	BC white	XX	E26 5 x Max 17W LED or 5 x Max 26W fluo
	BEL 180 FLE	BL electric blue		FLE GX24q-4 5x42W 120/277Vac
	BEL 180 LED	BW warm white		LED GU24 5x15W - included 120VAc - CRI80 diffused beam - 2700K 8000 lm - 107 lm/W
		GI gold yellow		dim. LED TRAILING EDGE PHASE CUT
	BEL 180 L10	MA brown		L10 95W LED - integrated 120/277VAc - CRI90 diffused beam - 3000K 10700 lm - 113 lm/W
		MT brick red		dim. LED 0-10V
		NE black		
		RB burgundy		
		RS red		
		VE green		



example composition code | US | BEL180E26 | RS | XX

Available colors



USBEL180\_ \_ \_ \_ \_ XX      CUSTOMER \_\_\_\_\_      NOTES \_\_\_\_\_

NOTICE: Luminous flux for all LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

