



**UP KWIC**  
S. & R. Cornelissen

Collection consisting of steel and aluminum ceiling/wall lamps, suspended and floor lamps with opaline blown glass diffuser. Available in two colours and two sizes. Built-in dimmable LED light source.

Typology: CEILING-WALL LAMP


**Ratings**

- Built in **LED** module
- CCT 3000 K
- diffused beam
- Surface installation over holes
- Supply voltage ~110-240V
- Switch mode: on-off
- Aluminum-Steel body

Product code composition

**KWIC / DRIVER INCLUDED / application:** both as ceiling or wall lamp

lb 4.18 ft<sup>3</sup>2.29

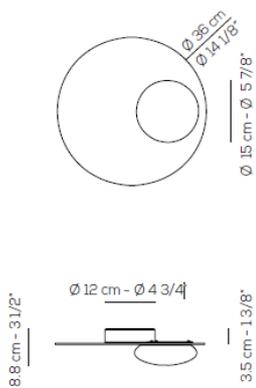

Type	Article	Colours	Finishings	Source
UP	KWIC 36	NE intense black BR transparent bronze BC white	XX	<b>LED</b> 18W - diffused beam 3000K*, 2700K

DRY LOCATION CRI>90 dimmable 0/1-10V 110-240VAC **LED** ~2151 lm\* ~119 lm/W\*  
 example composition code UP KWIC 36 XX XX LED

Available colors



NE  
Intense black



BR  
Transparent bronze



BC  
White

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

UPKWIC36 \_\_ XXLED

CUSTOMER \_\_\_\_\_

NOTES \_\_\_\_\_

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all built in LED luminaires is based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.



**UP KWIC**

S. & R. Cornelissen

Collection consisting of steel and aluminum ceiling/wall lamps, suspended and floor lamps with opaline blown glass diffuser. Available in two colours and two sizes. Built-in dimmable LED light source.

Typology: CEILING-WALL LAMP


**Ratings**

- Built in **LED** module
- CCT 3000 K
- diffused beam
- Surface installation over holes
- Supply voltage ~110-240V
- Switch mode: on-off
- Aluminum-Steel body

Product code composition

kg 1,9 m³ 0,065

**KWIC / DRIVER INCLUDED / application:** both as ceiling or wall lamp

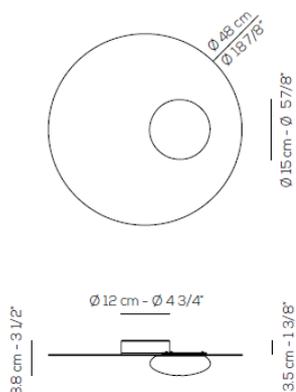

Type	Article	Colours	Finishings	Source
UP	KWIC 48	NE intense black BR transparent bronze BC white	XX	LED 18W - diffused beam 3000K*, 2700K

DRY LOCATION CRI>90 dimmable 0/1-10V 110-240VAC **LED** ~2151 lm\* ~119 lm/W\*

example composition code UP KWIC 48 XX XX LED

Available colors



NE Intense black



BR Transparent bronze



BC White

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

UPKWIC48 \_\_ XXLED

CUSTOMER \_\_\_\_\_

NOTES \_\_\_\_\_

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all built in LED luminaires is based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.