MUSE - UP MUSE 40 LED - technical sheet





UPMUSE40 LED


Design by Sandro Santantonio

Collection consisting of ceiling or wall lamps, suspended lamps and table lamps with metal frame and removable, washable elastic fabric covering. Available in several colours and sizes.

Typology: WALL, CEILING LAMP

Ratings

- •GU24 LED
- •CCT 2700 K, CRI 80
- Diffused light
- •Surface installation over holes
- Power supply 120V AC
- ·Switch mode: on-off
- •Dimmable ELV trailing edge phase cut LED bulbs
- Steel frame, painted

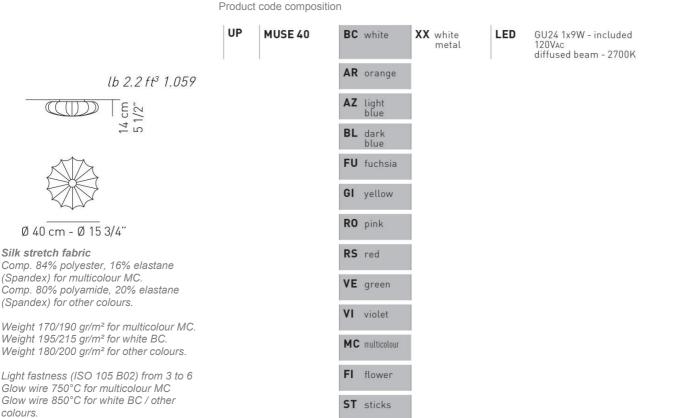





UPMUSE40__XXLED

NOTES


Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

CUSTOMER



MUSE - UP MUSE 60 LED - technical sheet





UPMUSE60 LED

Design by Sandro Santantonio

Collection consisting of ceiling or wall lamps. suspended lamps and table lamps with metal frame and removable, washable elastic fabric covering. Available in several colours and sizes. Screw fitting light source.

Typology: WALL, CEILING LAMP LAMP

Ratings

- •GU24 LED
- •CCT 2700 K, CRI 80
- Diffused light
- Surface installation over holes
- •Power supply 120V AC
- •Switch mode: on-off
- •Dimmable ELV trailing edge phase cut LED bulbs
- Steel frame, painted

lb 3.31 ft3 3.178





Ø 60 cm - Ø 23 5/8"

Silk stretch fabric

Comp. 84% polyester, 16% elastane (Spandex) for multicolour MC. Comp. 80% polyamide, 20% elastane (Spandex) for other colours.

Weight 170/190 gr/m² for multicolour MC. Weight 195/215 gr/m² for white BC. Weight 180/200 gr/m² for other colours.

Light fastness (ISO 105 B02) from 3 to 6 Glow wire 750°C for multicolour MC Glow wire 850°C for white BC / other colours.



CRI80 - dimmable ELV TRAILING EDGE 3200 lm 107 lm/W DRY LOCATION LED example composition code UP MUSE60 RS XX LED





Light blue



BL Dark



GI



FI flower

ST sticks













Flower



ΑZ

blue

FU Fuchsia

Yellow

RO Pink

RS

٧F Green

VΙ Violet

MC Multi



ST Sticks

UPMUSE60__XXLED

CUSTOMER

NOTES



MUSE - UP MUSE 80 LED - technical sheet





UPMUSE80 LED

Design by Sandro Santantonio


Collection consisting of ceiling or wall lamps, suspended lamps and table lamps with metal frame and removable, washable elastic fabric covering. Available in several colours and sizes.


Typology: WALL, CEILING LAMP

Ratings

- •GU24 LED
- •CCT 2700 K, CRI 80
- Diffused light
- Surface installation over holes
- •Power supply 120V AC
- •Switch mode: on-off
- •Dimmable ELV trailing edge phase cut LED bulbs
- Steel frame, painted







Ø 80 cm

Silk stretch fabric

Comp. 84% polyester, 16% elastane (Spandex) for multicolour MC. Comp. 80% polyamide, 20% elastane (Spandex) for other colours.

Weight 170/190 gr/m² for multicolour MC. Weight 195/215 gr/m² for white BC. Weight 180/200 gr/m² for other colours.

Light fastness (ISO 105 B02) from 3 to 6 Glow wire 750°C for multicolour MC Glow wire 850°C for white BC / other colours.



LED GU24 3x15W - included 120VAC diffused beam - 2700K



FI flower

ST sticks

Available colours BC AR





ΑZ Light blue



BL Dark blue



FU Fuchsia



GI Yellow



RO RS Pink Red



۷E Green



VΙ Violet



MC

color

FΙ Flower Multi



ST Sticks

UPMUSE80__XXLED

CUSTOMER

NOTES

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the



MUSE - UP MUS 120 LED - technical sheet





UPMUS120 LED Design by Sandro Santantonio

Collection consisting of ceiling or wall lamps, suspended lamps and table lamps with metal frame and removable, washable elastic fabric covering. Available in several colours and sizes.

Typology: WALL, CEILING LAMP


Ratings

- •GU24 LED
- •CCT 2700 K, CRI 80
- Diffused light
- •Surface installation over holes
- Power supply 120V AC
- ·Switch mode: on-off
- •Dimmable ELV trailing edge phase cut LED bulbs
- Steel frame, painted

Product code composition

lb 15.43 ft3 10.948





Ø 120 cm - Ø 47 1/4

Silk stretch fabric

Comp. 84% polyester, 16% elastane (Spandex) for multicolour MC. Comp. 80% polyamide, 20% elastane (Spandex) for other colours.

Weight 170/190 gr/m² for multicolour MC. Weight 195/215 gr/m² for white BC. Weight 180/200 gr/m² for other colours.

Light fastness (ISO 105 B02) from 3 to 6 Glow wire 750°C for multicolour MC Glow wire 850°C for white BC / other colours.

MUS 120

UP

BC white

XX white metal LED

GU24 3x15W - included diffused beam - 2700K

AR orange

AZ light blue

dark blue

FU fuchsia

GI yellow

RO pink

RS red

VE green

VI violet

MC multicolour

FI flower

ST sticks











- + dimmable ELV TRAILING EDGE

4800 lm 107 lm/W

example composition code

UP MUS120 FU XX LED

Available colours



BC White















Dark blue



FU Fuchsia



GΙ Yellow



RO Pink



RS Red



VΕ Green



VΙ

Violet

404.876.1064

Multi

color



Flower

Sticks

sales@illumco.com

UPMUS120 XXLED

CUSTOMER

NOTES

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

