

Light sources

- E26 model: E26 4 x 75W *
- E26 model: E26 4 x 26W fluo, self ballasted FLE *
- LED model: LED GU24 60W dimmable included, 120V, 2700K, CRI 82, 106 lm/W source

LAMPS ARE NOT INCLUDED, EXCEPT FOR LED MODEL

Installation

Mounts to standard electrical box

Structure

White painted metal

Diffuser

Methacrylate

Lampshade

TREVIRA® CS fabric 100% polyester
NFPA 701-2010: PASS | Glow wire 960 °C

BLACK NET FABRIC	SINGLE FABRIC
I= C1, F= M1, D= B1 DIN 4102 Fireproof class 214 ± 5% gr/m ² Weight Abrasion Resistance (martindale): 30.000 ± 10% rubs Pilling grade 5 Light fastness grade 5	I= C1, GB= CRIB 5, D= B1, F= M1 EN= 1021/1-2, IMO A 652 Fireproof class 340 ± 5% gr/m ² Weight Abrasion Resistance (martindale): 40.000 ± 10% rubs Pilling grade 5 Light fastness grade 6

Lampshade colours



** Add black netting (NE) over regular single fabric colours (AR, AZ, BC, BL, GR, FU, MA, RS, or VE) to create a more subdued look. See product code composition below on how to add this "exterior net" to have a double layer of fabric.

Product code composition

	MODEL	EXTERIOR NET	FABRIC COLOURS	LIGHT SOURCES
DOUBLE LAYER	USSKR140 E26	NE	AR AZ BC BL FU GR MA RS VE	E26 4 x 75W or E26 4 x 26W fluo
	USSKR140 LED			GU24 LED 60W
SINGLE LAYER	USSKR140 E26	XX	AR AZ BC BL FU GR MA RS VE	E26 4 x 75W or E26 4 x 26W fluo
	USSKR140 LED			GU24 LED 60W

code structure: MODEL LIGHT EXTERIOR INTERIOR

FABRIC COLOUR CODE:
 AR orange BL blue MA brown
 AZ light blue GR light grey RS red
 BC neutral white FU fuchsia VE light green

EXTERIOR NET CODE:
 NE black netting
 XX no black netting

* Most fixtures equipped with E26 sockets that accommodate medium base lamps may also be available in a GU24 twist and lock compact fluorescent socket or may be relabeled to a lower maximum wattage to accommodate energy efficiency and TITL 24 requirements.

Please Note: Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this technical data sheet. Confirm with Axo Light before order, reference: 1-2015 technical sheet.

US SKR 140


Design by Manuel Vivian

Complete collection consisting of wall, ceiling, pendant, floor, and table versions. All are available in fireproof TREVIRA® CS fabric with nine colour choices, plus the option of second layer of black netting fabric to provide a more subdued colour palette. Pendants and ceiling versions also available in single or two tiered.

Typology: PENDANT

Certifications: **TITL 24 COMPLIANT DRY LOCATION ONLY**

Standard Shipment: 10-14 weeks
Fast Shipment: 6-8 weeks
Exceptions: USSKR140E26XXBC
8 weeks standard lead time or 4 weeks fast shipment.
Contact Customer Service for availability.

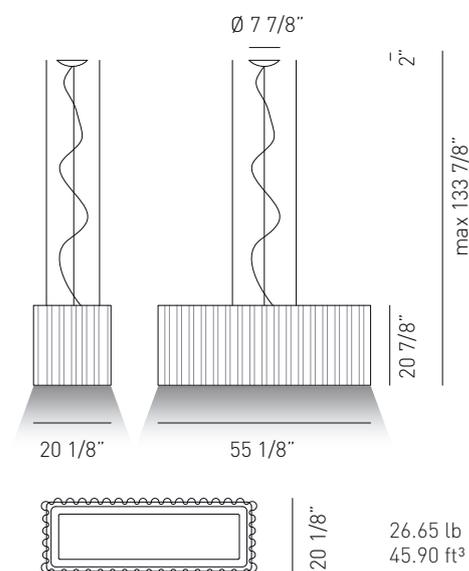

USSKR140

NAME: _____
NOTES: _____

Visit us at 425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com