



**UPUL1090 - recessed**  
**UPUL2090 - recessed**  
 Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum.  
 Available in several colors and sizes.

Typology: WALL, CEILING LAMP

**Ratings**

- Built in **LED** module
- CCT 3000 K
- Uplight (towards surface)
- Remote LED driver(s)
- Installs to ceiling or wall (requires recessed strain relief)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

*h10cm lb 5.95 ft³ 6.17*  
*h25cm lb 6.83 ft³ 6.17*

Product code composition

**U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER INCLUDED**


| Type | Article                         | Colours                   | Version                   | Source                        |
|------|---------------------------------|---------------------------|---------------------------|-------------------------------|
| UP   | <b>UL 1 090 LED</b><br>(h10 cm) | <b>AN</b> anthracite grey | <b>IN</b> recessed canopy | LED 63W - diffused beam 3000K |
|      | <b>UL 2 090 LED</b><br>(h25 cm) | <b>RU</b> rust brown      |                           |                               |

DRY LOCATION CRI90 120/277VAC **LED** 4904 lm 78 lm/W

hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code | **UP** | **UL1090LED** | **RU** | **IN** |

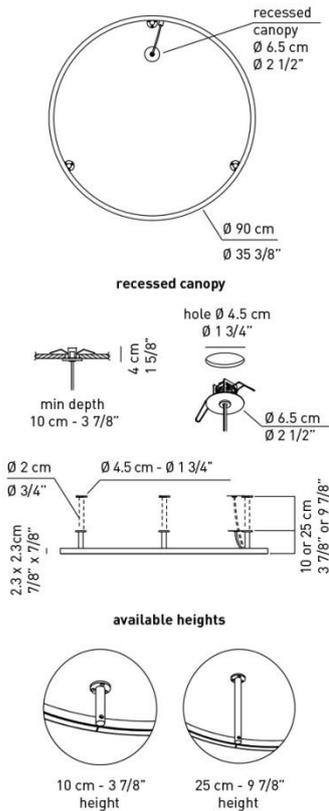


Available colors



UPUL \_ 090LED \_ \_ IN      CUSTOMER \_\_\_\_\_      NOTES \_\_\_\_\_

Luminous flux for all built-in LED luminaires is shown at source level.  
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.



**UPUL1090**  
**UPUL2090**  
 Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum.  
 Available in several colors and sizes.

Typology: WALL, CEILING LAMP

**Ratings**




- Built in **LED** module
- CCT 3000 K
- Uplight (towards surface)
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

h10cm lb 12.78 ft³ 6.17  
 h25cm lb 13.88 ft³ 6.17


Product code composition

**U-LIGHT / h10 cm or h25 cm ceiling lamp with canopy / DRIVER INCLUDED**

| Type | Article                         | Colours                   | Version                   | Source                        |
|------|---------------------------------|---------------------------|---------------------------|-------------------------------|
| UP   | <b>UL 1 090 LED</b><br>(h10 cm) | <b>AN</b> anthracite grey | <b>XX</b> standard canopy | LED 63W - diffused beam 3000K |
|      | <b>UL 2 090 LED</b><br>(h25 cm) | <b>RU</b> rust brown      |                           |                               |



**available heights**



Intertek DRY LOCATION CRI90 120/277VAC **LED** 4904 lm 78 lm/W

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code |UP| **UL2090LED** |AN| **XX** |

Available colors



**AN**  
Anthracite grey

**RU**  
Rust brown

CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

UPUL \_ 090LED \_ \_ XX

Luminous flux for all built-in LED luminaires is shown at source level.  
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.



**UPUL1120 - recessed**  
**UPUL2120 - recessed**  
 Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum.  
 Available in several colors and sizes.

Typology: WALL, CEILING LAMP

**Ratings**

- Built in **LED** module
- CCT 3000 K
- Uplight (towards surface)
- Remote LED driver(s)
- Installs to ceiling or wall (requires recessed strain relief)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

h10cm lb 7.05 ft<sup>3</sup> 10.76  
 h25cm lb 7.93 ft<sup>3</sup> 10.76

Product code composition

**U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER INCLUDED**


| Type | Article                         | Colours                   | Version                   | Source                        |
|------|---------------------------------|---------------------------|---------------------------|-------------------------------|
| UP   | <b>UL 1 120 LED</b><br>(h10 cm) | <b>AN</b> anthracite grey | <b>IN</b> recessed canopy | LED 86W - diffused beam 3000K |
|      | <b>UL 2 120 LED</b><br>(h25 cm) | <b>RU</b> rust brown      |                           |                               |

DRY LOCATION CRI90 120/277VAC **LED** 7354 lm 86 lm/W

hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code | **UP** | **UL2120LED** | **AN** | **IN** |

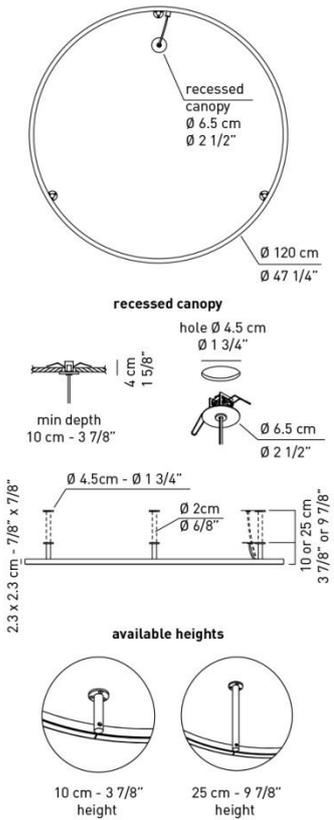

Available colors



CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

UPUL \_ 120LED \_ \_ IN

\_\_\_\_\_

Luminous flux for all built-in LED luminaires is shown at source level.  
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.



**UPUL1120**  
**UPUL2120**

Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum.  
Available in several colors and sizes.

Typology: WALL, CEILING LAMP

**Ratings**


- Built in **LED** module
- CCT 3000 K
- Uplight (towards surface)
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

*h10cm lb 14.55 ft<sup>3</sup> 10.76*  
*h25cm lb 15.43 ft<sup>3</sup> 10.76*

Product code composition

**U-LIGHT / h10cm or h25cm ceiling lamp with canopy / DRIVER INCLUDED**

| Type | Article                         | Colours                   | Version                   | Source                         |
|------|---------------------------------|---------------------------|---------------------------|--------------------------------|
| UP   | <b>UL 1 120 LED</b><br>(h10 cm) | <b>AN</b> anthracite grey | <b>XX</b> standard canopy | LED 86 W - diffused beam 3000K |
|      | <b>UL 2 120 LED</b><br>(h25 cm) | <b>RU</b> rust brown      |                           |                                |

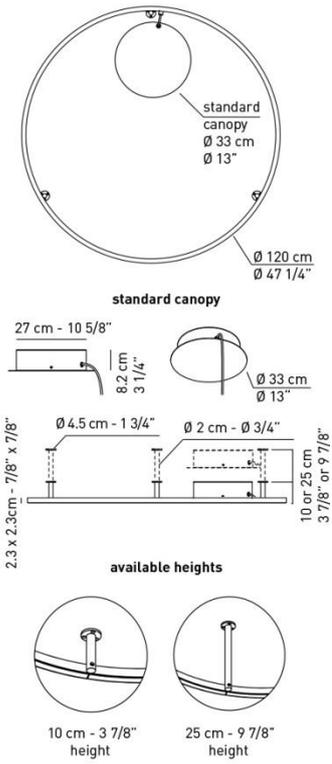

Intertek DRY LOCATION CRI90 120/277VAC **LED** 7354 lm 86 lm/W

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code | **UP** | **UL1120LED** | **RU** | **XX** |

Available colors



CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

UPUL \_ 120LED \_ \_ XX

\_\_\_\_\_

\_\_\_\_\_

Luminous flux for all built-in LED luminaires is shown at source level.  
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.



**UPUL1160 - recessed**  
**UPUL2160 - recessed**  
 Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum. Available in several colors and sizes.

Typology: WALL, CEILING LAMP

**Ratings**





- Built in **LED** module
- CCT 3000 K
- Uplight (towards surface)
- Remote LED driver(s)
- Installs to ceiling or wall (requires recessed strain relief)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

h10cm lb 11.02 ft³ 20.12  
 h25cm lb 11.90 ft³ 20.12

Product code composition

**U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER INCLUDED**

| Type | Article                         | Colours                   | Version                   | Source                         |
|------|---------------------------------|---------------------------|---------------------------|--------------------------------|
| UP   | <b>UL 1 160 LED</b><br>(h10 cm) | <b>AN</b> anthracite grey | <b>IN</b> recessed canopy | LED 125W - diffused beam 3000K |
|      | <b>UL 2 160 LED</b><br>(h25 cm) | <b>RU</b> rust brown      |                           |                                |



DRY LOCATION CRI90 120/277VAc **LED** 11000 lm 88 lm/W

hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code | **UP** | **UL1160LED** | **RU** | **IN** |

Available colors




**AN**  
Anthracite grey

**RU**  
Rust brown

CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

UPUL \_ 160LED \_ \_ IN

Luminous flux for all built-in LED luminaires is shown at source level.  
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.



**UP UL 1 160**  
**UP UL 2 160**  
 Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum.  
 Available in several colors and sizes.

Typology: WALL, CEILING LAMP

**Ratings**



- Built in **LED** module
- CCT 3000 K
- Uplight (towards surface)
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver\*
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

h10cm lb 20.28 ft³ 20.12  
 h25cm lb 21.16 ft³ 20.12


**Product code composition**

**U-LIGHT / h10 cm or h25 cm ceiling lamp with canopy / DRIVER INCLUDED**

| Type | Article                         | Colours                   | Version                   | Source                         |
|------|---------------------------------|---------------------------|---------------------------|--------------------------------|
| UP   | <b>UL 1 160 LED</b><br>(h10 cm) | <b>AN</b> anthracite grey | <b>XX</b> standard canopy | LED 125W - diffused beam 3000K |
|      | <b>UL 2 160 LED</b><br>(h25 cm) | <b>RU</b> rust brown      |                           |                                |



available heights



DRY LOCATION CRI90 120/277VAC **LED** 11000 lm 88 lm/W

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code | **UP** | **UL2160LED** | **AN** | **XX** |

\* If multiple luminaires are being connected to same dimming circuit please consider that source current from power supply unit (LED driver) is 0.1mA

Available colors



**AN**  
Anthracite grey

**RU**  
Rust brown

CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

UPUL \_ 160LED \_ \_ XX

\_\_\_\_\_

Luminous flux for all built-in LED luminaires is shown at source level.  
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.



**UPUL1180 - recessed**  
**UPUL2180 - recessed**  
 Design by Timo Ripatti


Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminium.  
 Available in several colours and sizes.  
 Available with sound absorbing panel option.

Typology: WALL, CEILING LAMP

**Ratings**

- Built in **LED** module
- CCT 3000 K or 2700K
- Wallward light (wall), downlight or uplight (ceiling)
- Installs to ceiling or wall (requires recessed strain relief)
- Power supply 120-270Vac
- Switch mode: on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminium profile 23 x 23 mm
- Opalescent diffuser


h10cm lb 12,56 ft<sup>3</sup> 21.26  
 h25cm lb 13,44 ft<sup>3</sup> 21.26



Product code composition

**U-LIGHT** / h10 cm or h25 cm recessed ceiling lamp / DRIVER INCLUDED

| Type | Article                         | Colours                   | Version                   | Source                                 |
|------|---------------------------------|---------------------------|---------------------------|--|
| UP   | <b>UL 1 180 LED</b><br>(h10 cm) | <b>AN</b> anthracite grey | <b>IN</b> recessed canopy | LED 123W - diffused beam 3000K*, 2700K |
|      | <b>UL 2 180 LED</b><br>(h25 cm) | <b>RU</b> rust brown      |                           |  |



DRY LOCATION CRI90 120/277Vac



9800 lm\* 88 lm/W


hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).


example composition code **UP** | **UL1180LED** | **RU** | **IN** |

-for optional drivers or dimming technology please refer to our pricelist or contact our representatives

-sound absorbing option upon request- for more information see [www.axolight.eu/u-light/u-light-sound-absorbing.pdf](http://www.axolight.eu/u-light/u-light-sound-absorbing.pdf)



available heights



Available colors



**AN**  
Anthracite grey

**RU**  
Rust brown


Sound absorbing option upon request

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

UPUL \_ 180LED \_ \_ IN

Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is based on nominal ratings of the LED sources.  
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.



**UP UL 1 180**  
**UP UL 2 180**  
 Design by Timo Ripatti


Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminium.  
 Available in several colours and sizes.  
 Available with sound absorbing panel option.

Typology: WALL, CEILING LAMP


**Ratings**

- Built in **LED** module
- CCT 3000K or 2700K
- Uplight (towards surface)
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver\*
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser


h10cm lb 23,14 ft³ 21.97  
 h25cm lb 24,5 ft³ 21.97



standard canopy



available heights



10 cm - 3 7/8" height



25 cm - 9 7/8" height

Product code composition

**U-LIGHT / h10 cm or h25 cm ceiling lamp with canopy / DRIVER INCLUDED**

| Type | Article                         | Colours                   | Version                   | Source                                 |
|------|---------------------------------|---------------------------|---------------------------|--|
| UP   | <b>UL 1 180 LED</b><br>(h10 cm) | <b>AN</b> anthracite grey | <b>XX</b> standard canopy | LED 153W - diffused beam 3000K*, 2700K |
|      | <b>UL 2 180 LED</b><br>(h25 cm) | <b>RU</b> rust brown      |                           |  |



DRY LOCATION

CRI90

120/277VAc



**LED**

9800 lm\* 88 lm/W

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code | **UP** | **UL2180LED** | **AN** | **XX** |

\* If multiple luminaires are being connected to same dimming circuit please consider that source current from power supply unit (LED driver) is 0.1mA

-sound absorbing option upon request- for more information see [www.axolight.eu/u-light/u-light-sound-absorbing.pdf](http://www.axolight.eu/u-light/u-light-sound-absorbing.pdf)

Available colors



**AN**  
Anthracite grey



**RU**  
Rust brown



Sound absorbing option upon request

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

UPUL \_ 180LED \_ \_ XX

Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.