

USULA090IN - recessed
Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum. Available in several colors and sizes.


Typology: SUSPENDED LAMP

Ratings


- Built in **LED** module
- CCT 3000 K
- Downlight
- Remote LED driver(s)
- Installs to ceiling (requires recessed strain relief)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

lb 5.51 ft³ 6.178

Product code composition



recessed canopy



U-LIGHT / recessed suspension / DRIVER INCLUDED

Type	Article	Colours	Version	Source
US	ULA 090 LED	AN anthracite grey	IN recessed canopy	LED 63W - diffused beam 3000K
		RU rust brown		



DRY LOCATION

CRI90

120/277VAC



4904 lm 78 lm/W

hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

example composition code **US** **ULA090LED** **AN** **IN**

Available colors



AN
Anthracite
grey



RU
Rust brown

CUSTOMER _____ NOTES _____

USULA090LED _ _ IN

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.



US ULA 090

Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum. Available in several colors and sizes.


Typology: SUSPENDED LAMP

Ratings

- Built in **LED** module
- CCT 3000 K
- Downlight
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

Product code composition

lb 12.78 ft³ 6.178

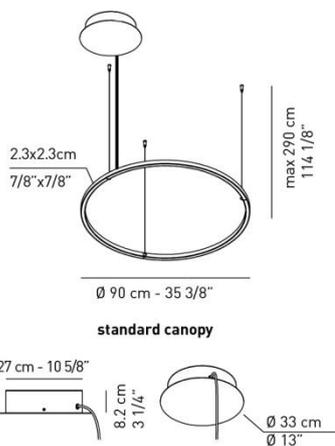

U-LIGHT / suspension with canopy / DRIVER INCLUDED

Type	Article	Colours	Version	Source
US	ULA 090 LED	AN anthracite grey	XX standard canopy	LED 63W - diffused beam 3000K
		RU rust brown		

DRY LOCATION CRI90 120/277VAC **LED** 4904 lm 78 lm/W
 example composition code **US | ULA090LED | RU | XX |**

Available colors




AN
Anthracite grey

RU
Rust brown

CUSTOMER _____ NOTES _____

USULA090LED _ _ XX

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.

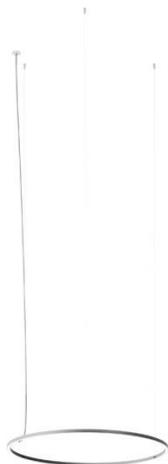

USULA120 - recessed

Design by Timo Ripatti


Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum. Available in several colors and sizes.

Typology: SUSPENDED LAMP

Ratings

- Built in **LED** module
- CCT 3000 K
- Downlight
- Remote LED driver(s)
- Installs to ceiling (requires recessed strain relief)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

lb 6.61 ft³ 10.76 Product code composition

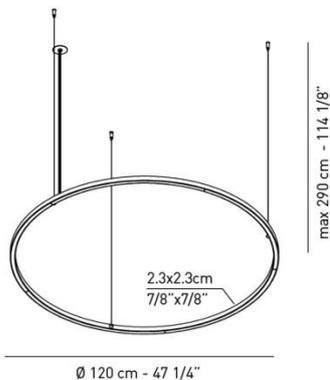


U-LIGHT / recessed suspension / DRIVER INCLUDED

Type	Article	Colours	Version	Source
US	ULA 120 LED	AN anthracite grey	IN recessed canopy	LED 86W - diffused beam 3000K
		RU rust brown		

DRY LOCATION CRI90 120/277VAC **LED** 7354 lm 86 lm/W

hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

example composition code | US | ULA120LED | RU | IN |



Available colors




AN
Anthracite
grey

RU
Rust brown

CUSTOMER _____ NOTES _____

USULA120LED _ _ IN

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.

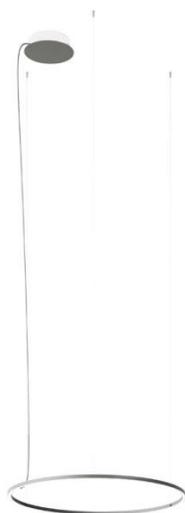

US ULA 120
Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum.
Available in several colors and sizes.


Typology: SUSPENDED

Ratings

- Built in **LED** module
- CCT 3000 K
- Downlight
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

lb 14.32 ft³ 10.76

Product code composition

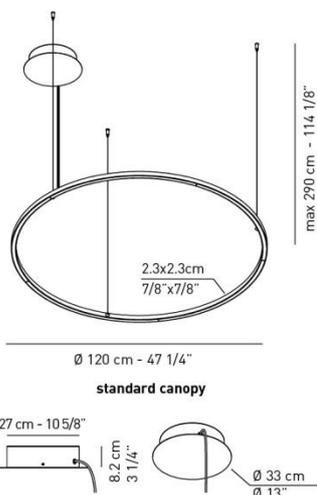

U-LIGHT / suspension with canopy / DRIVER INCLUDED

Type	Article	Colours	Version	Source
US	ULA 120 LED	AN anthracite grey	XX standard canopy	LED 86W - diffused beam 3000K
		RU rust brown		

DRY LOCATION CRI90 120/277VAC

 LED 7354 lm 86 lm/W

example composition code | **US** | **ULA120LED** | **AN** | **XX** |

Available colors




AN
Anthracite grey

RU
Rust brown

CUSTOMER _____ NOTES _____

USULA120LED _ _ XX

Luminous flux for all built-in LED luminaires is shown at source level.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.

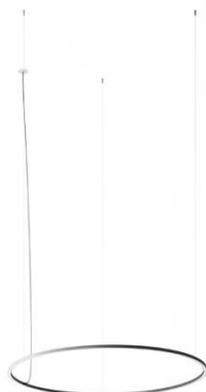

USULA160 - recessed
Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum.
Available in several colors and sizes.


Typology: SUSPENDED LAMP

Ratings

- Built in **LED** module
- CCT 3000 K
- Downlight
- Remote LED driver(s)
- Installs to ceiling (requires recessed strain relief)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

lb 10.58 ft³ 20.12

Product code composition

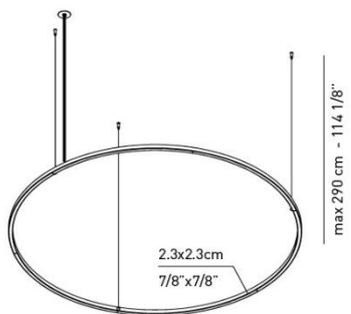


U-LIGHT / recessed suspension / DRIVER INCLUDED

Type	Article	Colours	Version	Source
US	ULA 160 LED	AN anthracite grey	IN recessed canopy	LED 125W - diffused beam 3000K
		RU rust brown		

DRY LOCATION CRI90 120/277VAC **LED** 11000 lm 88 lm/W

hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

example composition code | US | **ULA160LED** | RU | IN |



Available colors




AN
Anthracite
grey

RU
Rust brown

USULA160LED _ _ IN

CUSTOMER _____ NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.

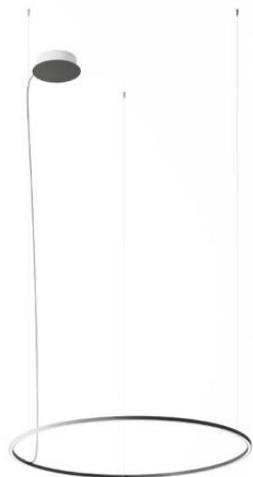

US ULA 160

Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum. Available in several colors and sizes.


Typology: SUSPENDED LAMP

Ratings

- Built in **LED** module
- CCT 3000 K
- Downlight
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

Product code composition

lb 20.06 ft³ 20.12




U-LIGHT / suspension with canopy / DRIVER INCLUDED

Type	Article	Colours	Version	Source
US	ULA 160 LED	AN anthracite grey	XX standard canopy	LED 125W - diffused beam 3000K
		RU rust brown		

DRY LOCATION CRI90 120/277VAC

LED 11000 lm 88 lm/W

example composition code | US | ULA160LED | AN | XX |



Available colors



AN
Anthracite
grey

RU
Rust brown

CUSTOMER _____ NOTES _____

USULA160LED _ _ XX

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.