



**UPVEL070**  
Design by Manuel Vivian

Collection of ceiling and suspended lamps. The cone-shaped lampshade is covered with a flame-retardant Micro 2000 fabric, which has a suede effect. Available in several colours and sizes.

Typology: CEILING LAMP

**Ratings**


- E26 or 2GX13 or GU24 LED
- Downlight
- Surface installation over holes
- Power supply 120V AC
- Switch mode: on-off
- Steel frame

**GU24 LED VERSION**


- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut LED bulbs

Product code composition

**VELVET / diffuser INCLUDED**

Type	Article	Colours (lampshade)	Colour (Radial diffuser)	Source
UP	<b>VEL 070 E26</b>	<b>BC</b> ice white	<b>BC</b> white	E26 2 x Max 17W LED or 2 x Max 20W fluo
	<b>VEL 070 FLE</b>	<b>AR</b> orange	<b>BL</b> electric blue	FLE 2GX13 1x55W 120Vac
	<b>VEL 070 LED</b>	<b>AZ</b> light blue <b>BA</b> ivory white <b>BL</b> blue <b>MA</b> brown <b>MT</b> brick red <b>NE</b> black <b>RB</b> burgundy	<b>BW</b> warm white <b>GI</b> gold yellow <b>MA</b> brown <b>MT</b> brick red <b>NE</b> black <b>RB</b> burgundy <b>RS</b> red <b>VE</b> green	LED GU24 2x15W - included 120Vac - CRI 80 diffused beam - 2700K 3200 lm - 107 lm/W 

lb 15.43 ft<sup>3</sup> 9.88




**Lampshade**

Micro 2000 flame retardant fabric 80% polyester + 20% cotton  
Fleece finishing 100% polyester  
Weight 276 ± 5% gr/m<sup>2</sup>  
Abrasion resistance (Martindale) 25.000 ± 10% rubs  
Pilling grade 4/5  
Light fastness grade 4/5 + self-extinguishing PVC.  
Glow wire 750 °C




example composition code |UP|VEL070LED|BL|RS|

Available lampshade colors

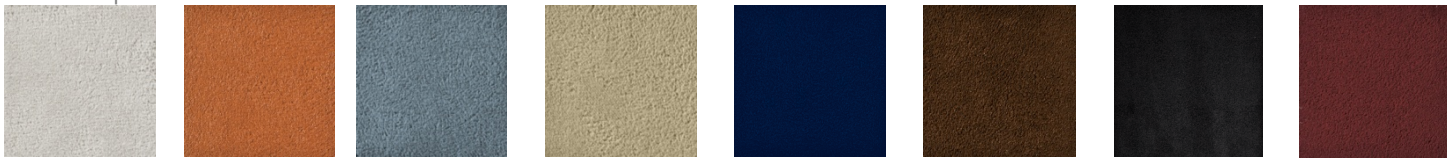

**BC** Ice white    **AR** Orange    **AZ** Light blue    **BA** Ivory white    **BL** Blue    **MA** Brown    **NE** Black    **RB** Burgundy

Available radial diffuser colors



**BC** White    **BL** Electric blue    **BW** Warm white    **GI** Gold yellow    **MA** Brown    **MT** Brick red    **NE** Black    **RB** Burgundy    **RS** Red    **VE** Green

UPVEL070 \_\_\_\_\_ CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_



425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305  
404.876.1064 sales@illumco.com

Luminous flux for all built-in LED luminaires is shown at source level.  
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the



**UPVEL100**  
Design by Manuel Vivian

Collection of ceiling and suspended lamps. The cone-shaped lampshade is covered with a flame-retardant Micro 2000 fabric, which has a suede effect. Available in several colours and sizes.

Typology: CEILING LAMP

**Ratings**

- E26 or 2GX11 or GU24 LED
- Downlight
- Surface installation over holes
- Power supply 120V AC
- Switch mode: on-off
- Steel frame

**GU24 LED VERSION**


- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut LED bulbs

Product code composition

VELVET / diffuser INCLUDED

Type	Article	Colours (lampshade)	Colour (Radial diffuser)	Source
UP	VEL 100 E26	BC ice white	BC white	E26 3 x Max 17W LED or 3 x Max 20W fluo
	VEL 100 FLE	AR orange	BL electric blue	FLE 2GX11 4x24W 120Vac
	VEL 100 LED	AZ light blue BA ivory white BL blue MA brown NE black RB burgundy	BW warm white GI gold yellow MA brown MT brick red NE black RB burgundy RS red VE green	LED GU24 3x15W - included 120Vac - CRI 80 diffused beam - 2700K 4800 lm - 107 lm/W - dimmable ELV TRAILING EDGE PHASE CUT LED

lb 19.84 ft³ 34.60




**Lampshade**

Micro 2000 flame retardant fabric 80% polyester + 20% cotton  
Fleece finishing 100% polyester  
Weight 276 ± 5% gr/m²  
Abrasion resistance (Martindale) 25.000 ± 10% rubs  
Pilling grade 4/5  
Light fastness grade 4/5 + self-extinguishing PVC.  
Glow wire 750 °C



example composition code |UP |VEL100E26 |RB |BC |

Available lampshade colors

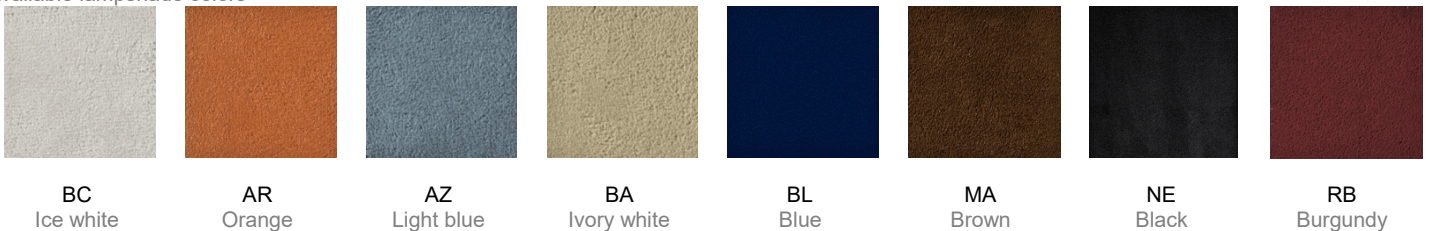

Available radial diffuser colors



UPVEL100\_\_\_\_\_ CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_



Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the



**UPVEL160**  
Design by Manuel Vivian

Collection of ceiling and suspended lamps. The cone-shaped lampshade is covered with a flame-retardant Micro 2000 fabric, which has a suede effect. Available in several colours and sizes.

Typology: CEILING LAMP

**Ratings**

- E26 or 2GX11 or GU24 LED
- Downlight
- Surface installation over holes
- Power supply 120V AC
- Switch mode: on-off
- Steel frame

**GU24 LED VERSION**


- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut LED bulbs

Product code composition

VELVET / diffuser INCLUDED

Type	Article	Colours (lampshade)	Colour (Radial diffuser)	Source
UP	VEL 160 E26	BC ice white	BC white	E26 5 x Max 17W LED or 5 x Max 26W fluo
	VEL 160 FLE	AR orange	BL electric blue	FLE 2GX11 4x55W 120VAc
	VEL 160 LED	AZ light blue BA ivory white BL blue MA brown MT brick red NE black RB burgundy	BW warm white GI gold yellow MA brown MT brick red NE black RB burgundy RS red VE green	LED GU24 5x15W - included 120VAc - CRI 80 diffused beam - 2700K 8000 lm - 107 lm/W 

lb 70.54 ft³ 78.39

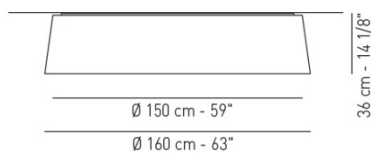

**Lampshade**

Micro 2000 flame retardant fabric 80% polyester + 20% cotton  
Fleece finishing 100% polyester  
Weight 276 ± 5% gr/m²  
Abrasion resistance (Martindale) 25.000 ± 10% rubs  
Pilling grade 4/5  
Light fastness grade 4/5 + self-extinguishing PVC.  
Glow wire 750 °C

DRY LOCATION


example composition code | UP | VEL160FLE | BA | GI |

Available lampshade colors



BC Ice white    AR Orange    AZ Light blue    BA Ivory white    BL Blue    MA Brown    NE Black    RB Burgundy

Available radial diffuser colors



BC White    BL Electric blue    BW Warm white    GI Gold yellow    MA Brown    MT Brick red    NE Black    RB Burgundy    RS Red    VE Green

UPVEL160\_\_\_\_\_ CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

225 Peachtree Hills Ave. NE #3 Atlanta, GA 30305  
404.876.1064 sales@illumco.com

Luminous flux for all built-in LED luminaires is shown at source level.  
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the