

Project: _____

Contact: _____

Fill in the shaded boxes using the information listed below




Order Code: **R-0060** - _____ - _____ - _____ - _____ - _____ - _____ - _____

Model (A) SUSPENSION (B) EXTERIOR FINISH (C) INTERIOR FINISH (D) LIGHT ENGINE DISC (E) LAMPING (F) LIGHT OUTPUT (G) OPTION CODE


EXAMPLE ORDER CODE: R-0060 - R - 049 - 117 - 001 - 30 - F - EM



Rincon pendant, Corded, Textured White outside, Textured White inside, Walnut light engine disc, 3000K.




6' Tall Person

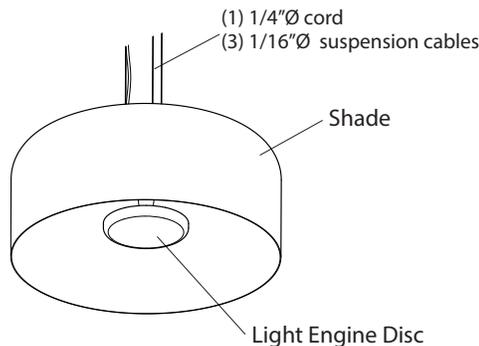

(A) SUSPENSION


W Corded White



B Corded Black

Canopy color will match cord color.

R Rigid Stem



Rigid stem and canopy matches finish of shade exterior

(B) EXTERIOR SHADE FINISH

049 Textured Black

060 Textured White

119 Brushed Aluminum

120 Brushed Brass

117 Distressed Brass

(C) INTERIOR SHADE FINISH

060 Textured White

119 Brushed Aluminum *

120 Brushed Brass *

117 Distressed Brass *

*finish will reduce delivered lumens

(D) LIGHT ENGINE DISC

001 Walnut

002 Dark Stained Walnut

095 White Washed Oak

049 Textured Black


060 Textured White

119 Brushed Aluminum

120 Brushed Brass

117 Distressed Brass

Photometric Polar Graph



(E) LAMPING CCT

27	2700K LED
30	3000K LED
35	3500K LED
40	4000K LED

CRI 90+

(F) LIGHT OUTPUT

F	Full Output - Wattage
R	50% Reduced Output - Wattage
C	Custom Reduction Percentage

Full output:
1945 Lumens (delivered)
30 Watts

Custom Reduction Percentage- to reduce both lumens and wattage.

Full output based on Textured White shade interior with 3000K.

(G) OPTION CODE

XD For custom drop lengths add "XD" followed by desired *Overall Height* in inches at end of order code. Otherwise a standard 72" drop length is provided which is field cuttable.

EM Emergency Backup option.


Fixture Specs

Dimensions: 28" Ø x 12.75"
Materials: Spun Aluminum Shade, Solid Wood or Spun Metal Accent, Protective Powder Coated Finishes
Product weight: 19 lb
Light source: Integrated LED
Light output: 1945 Lumens (Textured White shade interior)
Color accuracy: 90+ CRI

Driver Specs


120-277VAC Input
0-10V dimming down to 1% with dim to off
LED driver integrated into fixture

Suspension



Corded Suspension
Canopy 5" Ø X 2"H


- Textured White (CM-060) or Textured Black (CM-049)
- 3x 1/16" Stainless Steel Cables (CM-053)
- Field adjustable drop length: 1'0" min - 8'0" max
- Suitable for a sloped ceiling up to 30 degrees
- For extended cable length, please specify using XD designator in SKU builder
- 5-Conductor SVT Cable - color to match canopy (3 wires for AC power & ground, 2 wire for 0-10V dimming control)




Rigid Suspension
Canopy 8" Ø X 0.38"H

- Stem and canopy finish to match exterior shade finish
- 1" Ø rigid stem
- Field cuttable: 1'0" min - 8'0" max
- Suitable for a sloped ceiling up to 30 degrees
- For extended stem length, please specify using XD designator in SKU builder
- White 5-Conductor SVT Cable inside rigid stem (3 wires for AC power & ground, 2 wire for 0-10V dimming control)

B - EXTERIOR SHADE FINISH



049
 Textured Black
 Powder Coat
 CM - 049



060
 Textured White
 Powder Coat
 CM - 060



119
 Brushed Aluminum
 CM - 119




120
 Brushed Brass
 CM - 120



117
 Distressed Brass
 CM - 117

C - INTERIOR SHADE FINISH



060
 Textured White
 Powder Coat
 CM - 060



119
 Brushed Aluminum
 CM - 119



120
 Brushed Brass
 CM - 120



117
 Distressed Brass
 CM - 117

D - LIGHT ENGINE DISC FINISH




001
 Walnut
 CM - 001




002
 Dark Stained Walnut
 CM - 002



095
 White Washed Oak
 CM - 095



049
 Textured Black
 Powder Coat
 CM - 049



060
 Textured White
 Powder Coat
 CM - 060



119
 Brushed Aluminum
 CM - 119



120
 Brushed Brass
 CM - 120



117
 Distressed Brass
 CM - 117