




Veris 12, matte black with matte white interior



Veris, details

Veris was a concept we started exploring ten years ago. Two offset layers of petals simultaneously shield the light source while allowing reflected light to wash the inside petals, creating a dramatic ambient luminaire. The form materializes through a series of processes that utilize cutting edge CNC laser technology but still rely on skilled hand-rolling and bending of the aluminum petals.

## Veris 12 pendant

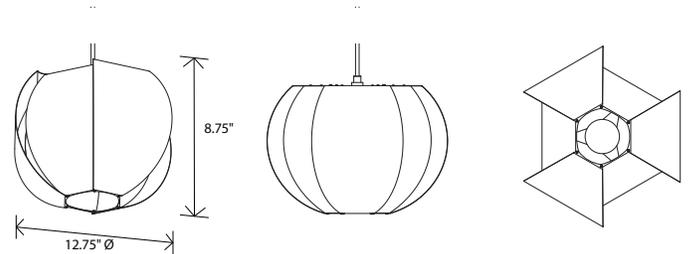

Dimensions: 12.75" Ø, 8.75"  
Product weight: 2 lb  
Suitable for a sloped ceiling

### Integrated LED Specifications

Light output: 1690 Lumens (source)  
Light color: 2700 K, 3000 K, 3500 K or 4000 K  
Color accuracy: 90+ CRI  
Power usage: 19.5 W  
Dimmable (see driver below)  
Driver must be housed in J-box  
Driver dimensions: 3.3" x 1.6" x 1", included

### E26 Medium Base Specifications

Lamping: E26 base, type A lamp, 60 W max  
Input voltage: 250 V AC max  
Bulb not included

Textured Black Powdercoat (CM-049) low profile round canopy with SVT-3 Cable, Black (CM-039)  
Canopy dimensions: 5" Ø, 0.3"  
See website for more canopy information  
Field adjustable drop length: 0'6" min - 8'0" max  
Specifications subject to change



### MATERIAL & FINISH OPTIONS

#### Shade Material

matte black (CM-085) with matte white interior B  
brushed aluminum (CM-012) A  
brushed rose gold (CM-046) G  
brushed brass (CM-047) R  
distressed brass (CM-096) D  
gloss white (CM-054) W

#### Lamping

2700 K LED 27  
3000 K LED 30  
3500 K LED 35  
4000 K LED 40  
medium base E26 socket MB

#### Driver (LED version only)

120-277 V AC input voltage  
0-10 V dimming  
TRIAC and ELV dimming at 120 V AC only P1



matte black (CM-085)  
with matte white interior



brushed aluminum  
(CM-012)



brushed rose gold  
(CM-046)




brushed brass  
(CM-047)



distressed brass  
(CM-096)



gloss white  
(CM-054)






Veris 22, matte black with matte white interior



Veris, details

Veris was a concept we started exploring ten years ago. Two offset layers of petals simultaneously shield the light source while allowing reflected light to wash the inside petals, creating a dramatic ambient luminaire. The form materializes through a series of processes that utilize cutting edge CNC laser technology but still rely on skilled hand-rolling and bending of the aluminum petals.

## Veris 22 pendant

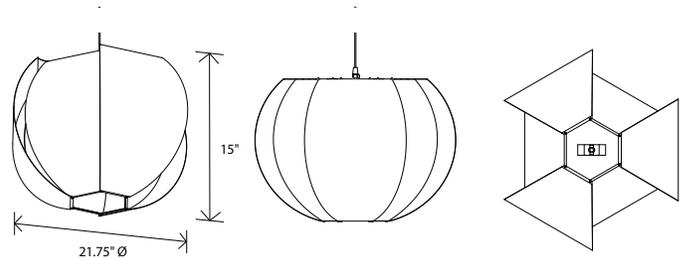

Dimensions: 21.75" Ø, 15"  
Product weight: 4 lb  
Suitable for a sloped ceiling

### Integrated LED Specifications

Light output: 1690 Lumens (source)  
Light color: 2700 K, 3000 K, 3500 K or 4000 K  
Color accuracy: 90+ CRI  
Power usage: 19.5 W  
Dimmable (see driver below)  
Driver must be housed in J-box  
Driver dimensions: 3.3" x 1.6" x 1", included

### E26 Medium Base Specifications

Lamping: 2x E26 base, type A lamp, 60 W max each  
Input voltage: 250 V AC max  
Bulb not included

Textured Black Powdercoat (CM-049) low profile round canopy with SVT-3 Cable, Black (CM-039)  
Canopy dimensions: 5" Ø, 0.3"  
See website for more canopy information  
Field adjustable drop length: 0'6" min - 8'0" max  
Specifications subject to change



### MATERIAL & FINISH OPTIONS

#### Shade Material

matte black (CM-085) with matte white interior B  
brushed aluminum (CM-012) A  
brushed rose gold (CM-046) G  
brushed brass (CM-047) R  
distressed brass (CM-096) D  
gloss white (CM-054) W

#### Lamping


2700 K LED 27  
3000 K LED 30  
3500 K LED 35  
4000 K LED 40  
medium base E26 socket MB

#### Driver (LED version only)

120-277 V AC input voltage  
0-10 V dimming  
TRIAC and ELV dimming at 120 V AC only P1



matte black (CM-085)  
with matte white interior



brushed aluminum  
(CM-012)



brushed rose gold  
(CM-046)




brushed brass  
(CM-047)



distressed brass  
(CM-096)




gloss white  
(CM-054)






Veris 34, matte black with matte white interior

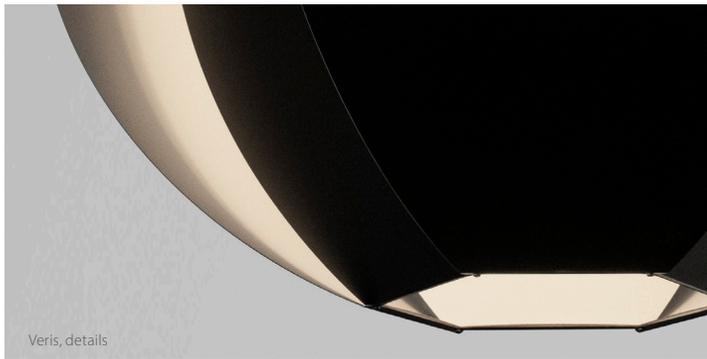

Veris, details

Veris was a concept we started exploring ten years ago. Two offset layers of petals simultaneously shield the light source while allowing reflected light to wash the inside petals, creating a dramatic ambient luminaire. The form materializes through a series of processes that utilize cutting edge CNC laser technology but still rely on skilled hand-rolling and bending of the aluminum petals.

**Veris 34**  
pendant

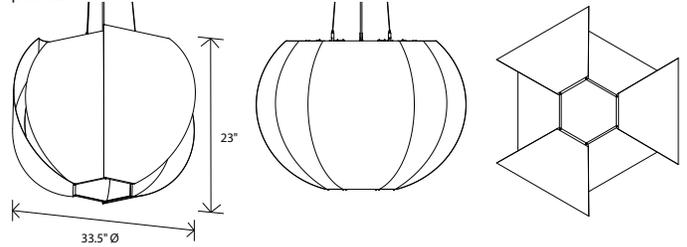

Dimensions: 33.5" Ø, 23"  
Product weight: 8 lb  
Suitable for a sloped ceiling

*Integrated LED Specifications*

Light output: 2815 Lumens (source)  
Light color: 2700 K, 3000 K, 3500 K or 4000 K  
Color accuracy: 90+ CRI  
Power usage: 32.5 W  
Dimmable (see driver below)  
Driver housed in extended canopy  
Driver dimensions: 3.3" x 2.4" x 1", included

*E26 Medium Base Specifications*

Lamping: 3x E26 base, type A lamp, 60 W max  
Input voltage: 250 V AC max  
Bulb not included

Textured Black Powdercoat (CM-049) extended round canopy with SVT-3 Cable, Black (CM-039) and 1/16" Stainless Steel Cables (CM-053)  
Canopy dimensions: 5" Ø, 2"  
See website for more canopy information  
Field adjustable drop length: 1'0" min - 8'0" max  
Specifications subject to change



**MATERIAL & FINISH OPTIONS**

Veris part # 06-260-34

*Shade Material*

- matte black (CM-085) with matte white interior B
- brushed aluminum (CM-012) A
- brushed rose gold (CM-046) G
- brushed brass (CM-047) R
- distressed brass (CM-096) D
- gloss white (CM-054) W

*Lamping*

- 2700 K LED 27
- 3000 K LED 30
- 3500 K LED 35
- 4000 K LED 40
- medium base E26 socket MB

*Driver (LED version only)*

- 120-277 V AC input voltage
- 0-10 V dimming
- TRIAC and ELV dimming at 120 V AC only P1



matte black (CM-085) with matte white interior



brushed aluminum (CM-012)



brushed rose gold (CM-046)



brushed brass (CM-047)



distressed brass (CM-096)



gloss white (CM-054)

