




ORG ph 1300

by Sebastian Summa

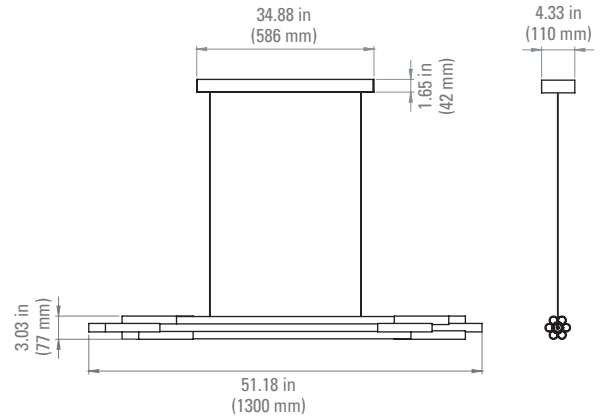

TECHNICAL SHEET

North America standards

FICHE TECHNIQUE

normes Nord Américaines



PENDANT LAMP

SUSPENSION


Materials Matériaux	Aluminum, glass, acrylic Aluminium, verre, acrylique
Net weight Poids net	4 Kg
Packaging Emballage	45.66 x 9.25 x 9.44 in 1160 x 235 x 240 mm
IP IP	20

Voltage Tension	110V
Class Classe	1
Watt Watt	17W
Source Source	INTEGRATED LED 2700K
Lumens output Lumens	1700lm (nominal value) 1700lm (valeur nominale)
Driver Driver	Driver supplied (7x2.4x1.4 in) TRIAC dimmable 500mA / 32-56V / 28W Driver fourni (180x60x35 mm) Dimmable TRIAC 500mA / 32-56V / 28W
Wire Câble	Length : 118in Longueur : 3 m
Switch Interrupteur	NA
Plug Fiches	NA



ORG ph 1600

by Sebastian Summa

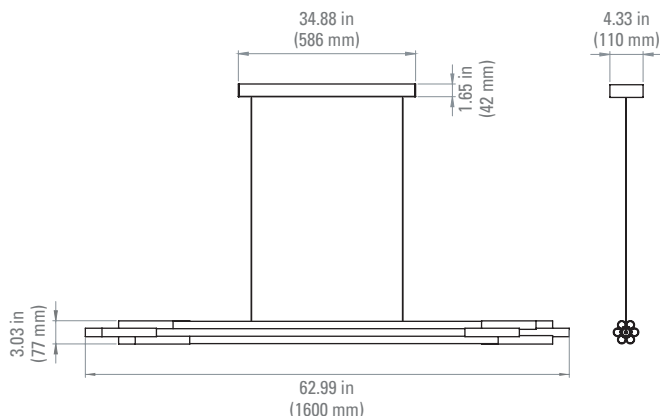

TECHNICAL SHEET

North America standards

FICHE TECHNIQUE

normes Nord Américaines



PENDANT LAMP

SUSPENSION

Materials
Matériaux

Aluminum, glass, acrylic
Aluminium, verre, acrylique

Net weight
Poids net

5 Kg

Packaging
Emballage

57.48 x 9.25 x 9.44 in
1460 x 235 x 240 mm

IP
IP

20

Voltage
Tension

110V

Class
Classe

1

Watt
Watt

22W

Source
Source

INTEGRATED LED 2700K

Lumens output
Lumens

2200lm (nominal value)
2200lm (valeur nominale)

Driver

Driver

Driver supplied (5 x 2 x 0.9 in)
TRIAC dimmable 500mA / 38-50V / 25W
Driver fourni (122 x 42,8 x 24 mm)
Dimmable TRIAC 500mA / 38-50V / 25W

Wire
Câble

Length : 118in
Longueur : 3 m

Switch
Interrupteur

NA

Plug
Fiches

NA