


ORG pv 1300

by Sebastian Summa

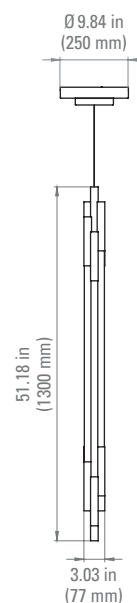

TECHNICAL SHEET North America standards

FICHE TECHNIQUE normes Nord Américaines



PENDANT LAMP

SUSPENSION

Materials
Matériaux

Aluminum, glass, acrylic
Aluminium, verre, acrylique

Net weight
Poids net

4 Kg

Packaging
Emballage

46 x 13.2 x 7.67 in
1170 x 335 x 195 mm

IP
IP

20

Voltage
Tension

110V

Class
Classe

1

Watt
Watt

17W

Source
Source

INTEGRATED LED 2700K

Lumens output
Lumens

1700 lm (nominal value)
1700 lm (valeur nominale)

Driver
Driver

Driver supplied (7 x 2.4 x 1.4 in)
TRIAC dimmable 500 mA / 32-56V / 28W
Driver fourni (180 x 60 x 35 mm)
Dimmable TRIAC 500 mA / 32-56V / 28W

Wire
Câble

Length : 118 in
Longueur : 3 m

Switch
Interrupteur


NA

Plug
Fiches

NA

ORG pv 1600

by Sebastian Summa

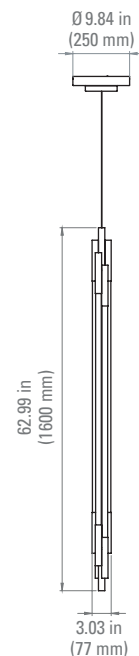

TECHNICAL SHEET North America standards

FICHE TECHNIQUE normes Nord Américaines



PENDANT LAMP

SUSPENSION

Materials Matériaux	Aluminum, glass, acrylic Aluminium, verre, acrylique
Net weight Poids net	5 Kg
Packaging Emballage	57.87 x 13.2 x 7.67 in 1470 x 335 x 195 mm
IP IP	20

Voltage Tension	110V
Class Classe	1
Watt Watt	22W
Source Source	INTEGRATED LED 2700K
Lumens output Lumens	2200lm (nominal value) 2200lm (valeur nominale)
Driver Driver	Driver supplied (5x2x0.9in) TRIAC dimmable 500mA / 38-50V / 25W Driver fourni (122x42,8x24 mm) Dimmable TRIAC 500mA / 38-50V / 25W
Wire Câble	Length : 118in Longueur : 3 m
Switch Interrupteur	NA
Plug Fiches	NA