


ORG pv 1300

by Sebastian Summa

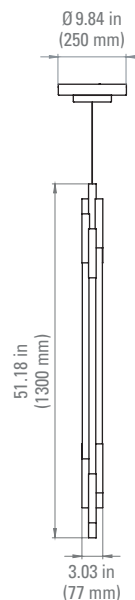

TECHNICAL SHEET

North America standards

FICHE TECHNIQUE

normes Nord Américaines



PENDANT LAMP


SUSPENSION

Materials Matériaux	Aluminum, glass, acrylic Aluminium, verre, acrylique
Net weight Poids net	4 Kg
Packaging Emballage	46 x 13.2 x 7.67 in 1170 x 335 x 195 mm
IP IP	20

Voltage Tension	110V
Class Classe	1
Watt Watt	17W
Source Source	INTEGRATED LED 2700K
Lumens output Lumens	1700lm (nominal value) 1700lm (valeur nominale)
Driver Driver	Driver supplied (7 x 2.4 x 1.4 in) TRIAC dimmable 500mA / 32-56V / 28W Driver fourni (180 x 60 x 35 mm) Dimmable TRIAC 500mA / 32-56V / 28W
Wire Câble	Length : 118in Longueur : 3 m
Switch Interrupteur	NA
Plug Fiches	NA

ORG pv 1600

by Sebastian Summa

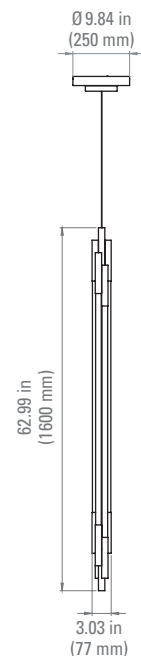

TECHNICAL SHEET

North America standards

FICHE TECHNIQUE

normes Nord Américaines



PENDANT LAMP

SUSPENSION

Materials Matériaux	Aluminum, glass, acrylic Aluminium, verre, acrylique
Net weight Poids net	5 Kg
Packaging Emballage	57.87 x 13.2 x 7.67 in 1470 x 335 x 195 mm
IP IP	20

Voltage Tension	110V
Class Classe	1
Watt Watt	22W
Source Source	INTEGRATED LED 2700K
Lumens output Lumens	2200lm (nominal value) 2200lm (valeur nominale)
Driver Driver	Driver supplied (5 x 2 x 0.9 in) TRIAC dimmable 500mA / 38-50V / 25W Driver fourni (122 x 42,8 x 24 mm) Dimmable TRIAC 500mA / 38-50V / 25W
Wire Câble	Length : 118in Longueur : 3 m
Switch Interrupteur	NA
Plug Fiches	NA