

# FLOS

## Ktribe F2 (Halogen), Transparent - Specification Sheet by Philippe Starck, 2007

Mounting	Free Standing
Lamp (Bulb) Description	1 x 150W T-10 Medium Frosted Halogen (Included)
Environment	Indoor - Dry Location
Dimming	Dimmable
Finish	Transparent
Technical and Product Description	KTRIBE F2 floor lamp providing diffused lighting. Base, rod support and diffuser support in die-cast, polished and chrome-plated Zamak alloy. Rod in polished aluminum. Injection-molded PC (polycarbonate) opal inner diffuser and support for the lamp-holder. Outer diffusers in transparent PMMA (polymethylmethacrylate), silver or bronze on the inner surface, by vacuum aluminum coating. Injection-molded PC (polycarbonate) upper ring, completely transparent, or transparent brown for the outer bronze diffuser.

### Electrical

Voltage	120
Switching	0-100% dimmer installed on the cord
IP Rating	IP20

### Physical

Cord Length (inches)	79" - Black
Construction Material	Aluminum, Plastic
Weight	14.70 lbs




all finish options:



FU630500 Transparent

### Dimensional Image

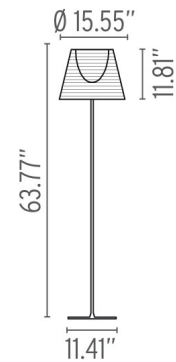

### Certifications



### Lamping (Bulb)



150W T-10 Medium Frosted Halogen

### Lamping (Bulb)



LED018 PRO-T38LED 14W 120V E26 2700K  
DIMM - 1800lm - CRI80 Additional

### Lamping (Bulb)



LED018 PRO-T38LED 14W 120V E26 2700K

**illuminations**  
425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305  
404.876.1064 sales@illumco.com

# FLOS

## Ktribe F3 (Halogen), Transparent - Specification Sheet by Philippe Starck, 2007

Mounting	Free Standing
Lamp (Bulb) Description	1 x 150W T-10 Medium Frosted Halogen (Included)
Environment	Indoor - Dry Location
Dimming	Dimmable
Finish	Transparent
Technical and Product Description	KTRIBE F3 floor lamp providing diffused lighting. Base, rod support and diffuser support in die-cast, polished and chrome-plated Zamak alloy. Rod in polished aluminum. Injection-molded PC (polycarbonate) opal inner diffuser and support for the lamp-holder. Outer diffusers in transparent PMMA (polymethylmethacrylate), silver or bronze on the inner surface, by vacuum aluminum coating. Injection-molded PC (polycarbonate) upper ring, completely transparent, or transparent brown for the outer bronze diffuser.

### Electrical






Voltage	120
Switching	0-100% dimmer installed on the cord
IP Rating	IP20

### Physical

Construction Material	Aluminum, Plastic, Fabric
Weight	30.86 lbs




all finish options:

 Aluminized Bronze	 Aluminized Silver
 Fumeé	 Plissé Cloth
 Transparent	



 FU630100 Transparent

### Dimensional Image

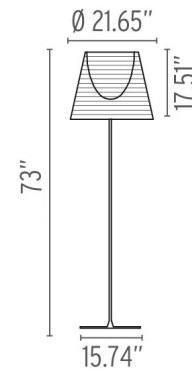

### Certifications



### Lamping (Bulb)



150W T-10 Medium Frosted Halogen

### Lamping (Bulb)



LED018 PRO-T38LED 14W 120V E26 2700K  
DIMM - 1800lm - CRI80 Additional

### Lamping (Bulb)



LED018 PRO-T38LED 14W 120V E26 2700K

  
425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305  
404.876.1064 sales@illumco.com