

FLOS

Ktribe F3 Outdoor, Green Wall - Specification Sheet by Philippe Starck, 2010

Mounting	Free Standing
Lamp (Bulb) Description	1 x 250W T-10 Medium Frosted Halogen
Environment	Outdoor - Wet location
Dimming	Phase-cut Dimming / Triac Type
Finish	Green Wall
Technical and Product Description	KTIRBE OUTDOOR F3 floor lamp providing diffused light for outdoor use. Die-cast aluminum base and stem support. Galvanized structural parts to protect against atmospheric agents. Chrome finish. Injection-moulded polycarbonate internal diffuser and bulb-holder. Exterior diffuser made from braided coloured PVC tubes and inner frame from polyester painted phosphor-chromed aluminium bars. Steel cataphoresis treated counterweight for effective protection against atmospheric agents. Phosphor-chromed die-cast aluminum outer diffuser cover.

Electrical

Switching	No switch - Cord and plug only
IP Rating	IP55


Physical

Cord Length (inches)	22.97'
Construction Material	Die-cast aluminum, Polycarbonate, PVC, Stainless steel
Weight	50.70 lbs



● FU626841 Green Wall

Dimensional Image

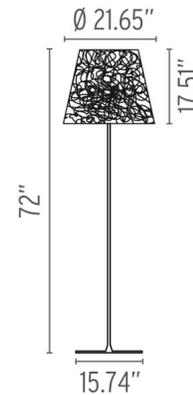

Certifications



Lamping (Bulb)



250W T-10 Medium Frosted Halogen

Lamping (Bulb)



LED018 PRO-T38LED 14W 120V E26 2700K
DIMM - 1800lm - CRI80 Additional

Lamping (Bulb)



LED030 PRO-T38LED 13W 120V E26 3000K

FLOS

Ktribe F3 Outdoor, Panama - Specification Sheet by Philippe Starck, 2010

Mounting	Free Standing
Lamp (Bulb) Description	1 x 250W T-10 Medium Frosted Halogen (included)
Environment	Outdoor - Wet location
Dimming	Phase-cut Dimming / Triac Type
Finish	Panama
Technical and Product Description	KTIRBE OUTDOOR F3 floor lamp providing diffused light for outdoor use. Die-cast aluminum base and stem support. Galvanized structural parts to protect against atmospheric agents. Chrome finish. Injection-moulded polycarbonate internal diffuser and bulb-holder. Exterior diffuser made from braided coloured PVC tubes and inner frame from polyester painted phosphor-chromed aluminium bars. Steel cataphoresis treated counterweight for effective protection against atmospheric agents. Phosphor-chromed die-cast aluminum outer diffuser cover.

Electrical

Switching	No switch - Cord and plug only
IP Rating	IP55


Physical

Cord Length (inches)	22.97"
Weight	50.70 lbs



FU626822 Panama

Dimensional Image

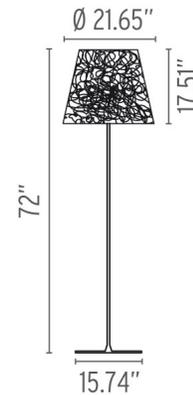

Certifications



Lamping (Bulb)



250W T-10 Medium Frosted Halogen

Lamping (Bulb)



LED018 PRO-T38LED 14W 120V E26 2700K
DIMM - 1800lm - CRI80 Additional

Lamping (Bulb)



LED018 PRO-T38LED 14W 120V E26 2700K