

FLOS

Skynest S, Brick - Specification Sheet by Marcel Wanders, 2022

Mounting	Ceiling Pendant
Lamp (Bulb) Description	LED 78W 6650lm 2700K CRI90
Environment	Indoor - Dry Location
Dimming	Active 0-10V/DALI/Push Button
Finish	Brick
Technical and Product Description	Diffuse pendant light fixture: a combination of luminous and dark elements arranged into a network and formed of core structures covered with a thin interwoven colorful tubular mesh made from recycled and recyclable fabric produced from polyester.

Every single luminous element is powered by special micro-connectors located at the top of the dome and is covered with a two-tone mesh, while the side facing the inside of the dome is always white in order to allow for optimal light emission from the LED module.

The fixture is fitted with a built-in balancing system at the top of the dome which helps adjust its balance, making it perfectly stable. The bottom of the dome is completed by an aluminum ring that keeps the dome's entire structure in place through a simple snap-fit system.


The product is assembled with absolutely no glue so it can be fully separated to be recycled in the future and in case of any future repairs or replacements.

Electrical

Voltage	100-240V
IP Rating	IP20


Physical

Cord Length (inches)	106 "
Construction Material	Aluminium, Recycled and recyclable fabric
Weight	9.04 lbs

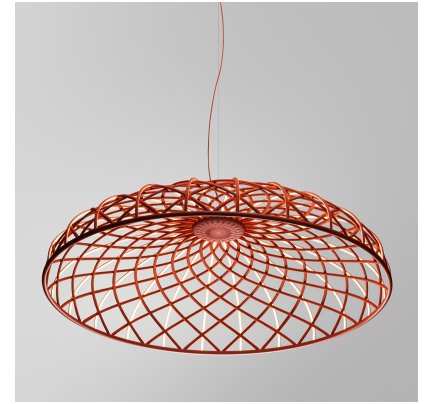

F6392035 Brick

Dimensional Image

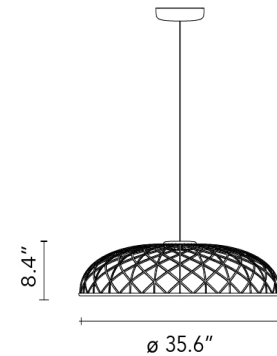

Certifications

