




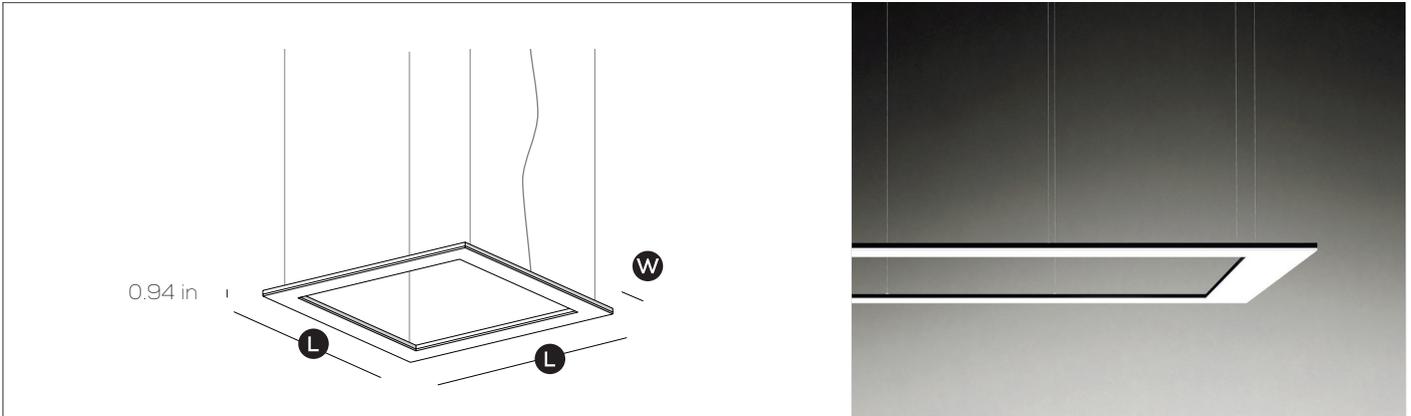

FRAME SUSPENDED - Square Version



	W 3.94 39.37 x 39.37 in 	W 3.94 59.06 x 59.06 in 	W 7.87 78.74 x 78.74 in 
ELECTRICAL SPECS.			
Voltage:	24 V DC	24 V DC	24 V DC
Driver - transformer:	AC/DC 24 V	AC/DC 24 V	AC/DC 24 V
Consumption P1:	80 W	120 W	160 W
Consumption P2:	144 W	224 W	288 W
Dimmability:	DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)	DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)	DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)
PHYSICAL SPECS.			
Thickness:	0.94 in	0.94 in	0.94 in
Weight:	22.04 lb	33.06 lb	88.18 lb
Materials:	Acrylic (PMMA) - Aluminium	Acrylic (PMMA) - Aluminium	Acrylic (PMMA) - Aluminium
Size:	L 39.37 in L 39.37 in W 3.94 in	59.06 in 59.06 in 3.94 in	78.74 in 78.74 in 7.87 in
Number of susp. cables:	8	12	16
LED			
Luminous flux output P1:	2278 lm	3402 lm	4675 lm
Luminous flux output P2:	4142 lm	6185 lm	8500 lm
LED color temp. (CCT):	2700 K, 3000 K, 4000 K	2700 K, 3000 K, 4000 K	2700 K, 3000 K, 4000 K
Color rendering index:	RA min. 90 - R9 min. 50	RA min. 90 - R9 min. 50	RA min. 90 - R9 min. 50
LED positioning:	On the external perimeter and/or the internal perimeter	On the external perimeter and/or the internal perimeter	On the external perimeter and/or the internal perimeter
GENERAL SPECS.			
Mounting:	Ceiling, suspended	Ceiling, suspended	Ceiling, suspended
Environment of use:	Indoor	Indoor	
Estimated LED Lifespan:	50,000 hours	50,000 hours	
Warranty:	2 years	2 years	




425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com



FRAME SUSPENDED - Square Version



SIZES AND FINISHES

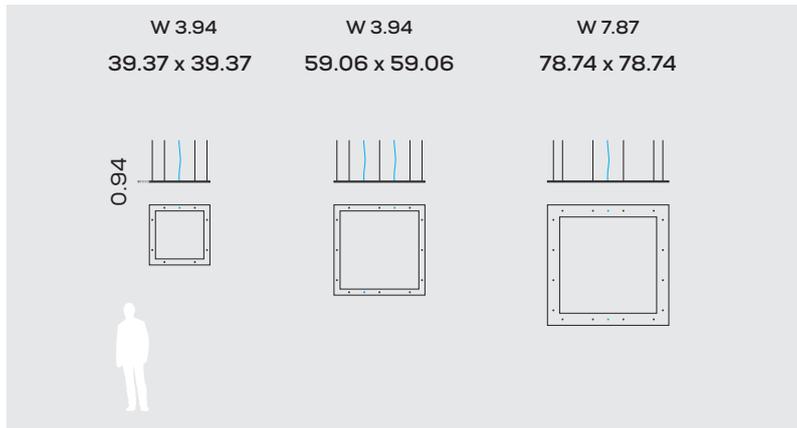

White Black Ox


Available on request in different sizes and special finishes.

Product code see Frame brochure pag. 23

TECHNICAL DESCRIPTION

Frame is the series of FOLIO® products with rectangular and square frame, with a thickness of 0.94 in, width up to 78.74 in and length up to 118.11 in. LED panels with transparent methacrylate slab with microprism laser incision, 0.39 in opal diffuser (PMMA) and 0.55 in aluminum case. Single or double LED installed on the internal and/or external perimeter of the panel.

POLAR DIAGRAM [cd/klm]



APPLICATIONS



illuminations
 425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
 404.876.1064 sales@illumco.com