




GIRO WALL

FOLIO®

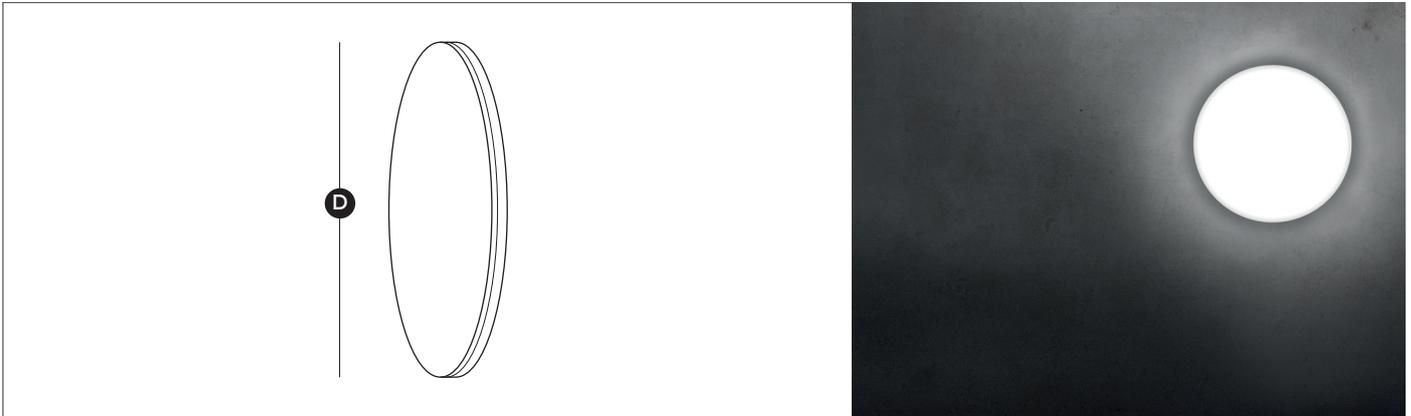

	Ø 23.62 in	Ø 31.50 in	Ø 39.37 in	Ø 47.24 in
ELECTRICAL SPECS.				
Voltage:	24 V DC	24 V DC	24 V DC	24 V DC
Driver - transformer:	AC/DC 24 V	AC/DC 24 V	AC/DC 24 V	AC/DC 24 V
Consumption:	38 W	50 W	63 W	75 W
Dimmability:	DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)	DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)	DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)	DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)
PHYSICAL SPECS.				
Thickness:	0.90 in	0.90 in	0.90 in	0.90 in
Weight:	24.25 lb	44.09 lb	66.14 lb	94.80 lb
Materials:	Acrylic (PMMA) - Aluminium			
Size:	D Ø 23.62 in	Ø 31.50 in	Ø 39.37 in	Ø 47.24 in
LED				
Luminous flux output:	1850 lm	2408 lm	2941 lm	3800 lm
LED color temp. (CCT):	2700 K, 3000 K, 4000 K			
Color rendering index:	RA min. 90 - R9 min. 50			
LED positioning:	On the perimeter	On the perimeter	On the perimeter	On the perimeter
GENERAL SPECS.				
Mounting:	Wall lamp	Wall lamp	Wall lamp	Wall lamp
Environment of use:	Indoor	Indoor	Indoor	Indoor
Estimated LED Lifespan:	50,000 hours	50,000 hours	50,000 hours	50,000 hours
Warranty:	2 years	2 years	2 years	2 years


illuminaations
 425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
 404.876.1064 sales@illumco.com



GIRO WALL



SIZES AND FINISHES

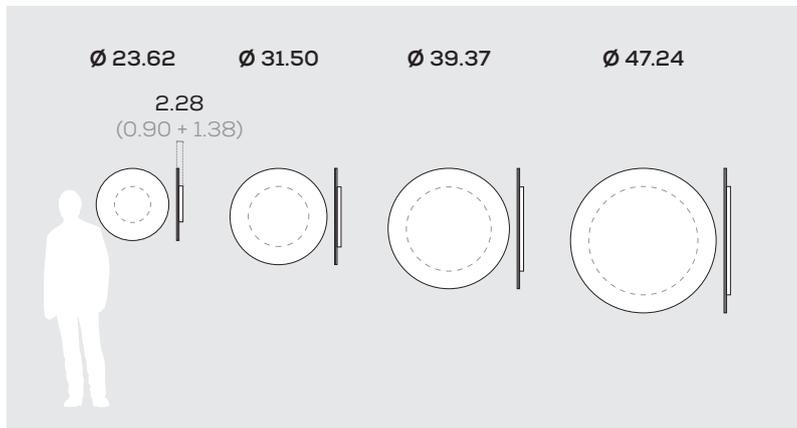

White Black


Available on request in different sizes and special finishes.

Product code see Giro brochure pag. 33

TECHNICAL DESCRIPTION

Giro is the series of FOLIO® products of circular shape, with a thickness of 0.90 in and diameters between 23.62 in and 47.24 in. LED panels with transparent methacrylate slab with microprism laser incision, 0.39 in opal diffuser (PMMA) and 0.51 in aluminum case. High energy-efficient perimeter LED, dimmable with DXM, DALI, 1-10V signal (with PWM) and potentiometer (with PWM).

POLAR DIAGRAM [cd/klm]



APPLICATIONS



425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com