




LINE SUSPENDED

FOLIO®

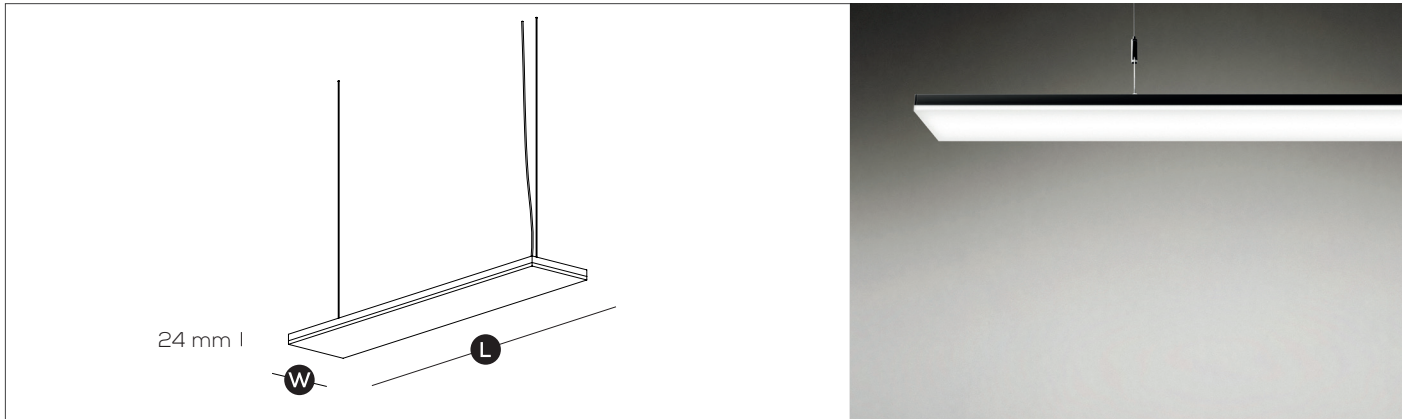

	7.87 x 47.24 in	7.87 x 59.06 in	7.87 x 70.87 in	5.91 x 94.49 in	5.91 x 118.11 in
ELECTRICAL SPECS.					
Voltage:	24 V DC	24 V DC	24 V DC	24 V DC	24 V DC
Driver - transformer:	AC/DC 24 V	AC/DC 24 V	AC/DC 24 V	AC/DC 24 V	AC/DC 24 V
Consumption P1:	26 W	33 W	40 W	53 W	66 W
Consumption P2:	53 W	66 W	80 W	106 W	132 W
Dimmability:	DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)	DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)	DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)	DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)	DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)
PHYSICAL SPECS.					
Thickness:	0.94 in	0.94 in	0.94 in	0.94 in	0.94 in
Weight:	13.22 lb	17.63 lb	19.84 lb	19.84 lb	24.45 lb
Materials:	Acrylic (PMMA) - Aluminium	Acrylic (PMMA) - Aluminium	Acrylic (PMMA) - Aluminium	Acrylic (PMMA) - Aluminium	Acrylic (PMMA) - Aluminium
Size:	W 7.87 in L 47.24 in	7.87 in 59.06 in	7.87 in 70.87 in	5.91 in 94.49 in	5.91 in 118.11 in
Number of susp. cables:	3	4	4	5	6
LED					
Luminous flux output P1:	1103 lm	1260 lm	1365 lm	1701 lm	2048 lm
Luminous flux output P2:	2100 lm	2400 lm	2600 lm	3240 lm	3900 lm
LED color temp. (CCT):	2700 K, 3000 K, 4000 K	2700 K, 3000 K, 4000 K	2700 K, 3000 K, 4000 K	2700 K, 3000 K, 4000 K	2700 K, 3000 K, 4000 K
Color rendering index:	RA min. 90 - R9 min. 50	RA min. 90 - R9 min. 50	RA min. 90 - R9 min. 50	RA min. 90 - R9 min. 50	RA min. 90 - R9 min. 50
LED positioning:	L One or two sides	One or two sides	One or two sides	One or two sides	One or two sides
GENERAL SPECS.					
Mounting:	Ceiling, suspended	Ceiling, suspended	Ceiling, suspended	Ceiling, suspended	Ceiling, suspended
Environment of use:	Indoor	Indoor	Indoor	Indoor	Indoor
Estimated LED Lifespan:	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours
Warranty:	2 years	2 years	2 years	2 years	2 years


425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com



LINE SUSPENDED



SIZES AND FINISHES

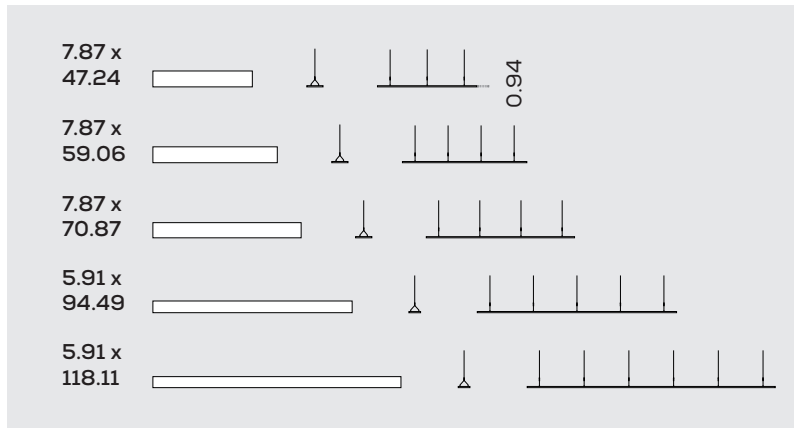


White Black Ox

TECHNICAL DESCRIPTION

Line is the series of FOLIO® products of rectangular shape, with a thickness of 0.94 in and width between 3.94 in and 11.81 in, elegant and graceful even with a length of 118.11 in LED panels with microprism laser incision, 0.39 in opal diffuser (PMMA) and 16mm aluminum case. Single or double LED installed along the length of the panel.


POLAR DIAGRAM [cd/klm]

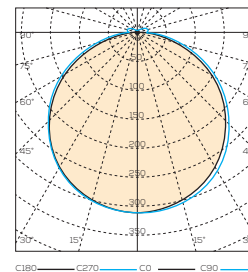

Available on request in different sizes and special finishes.

Product code see Line brochure pag. 17

APPLICATIONS

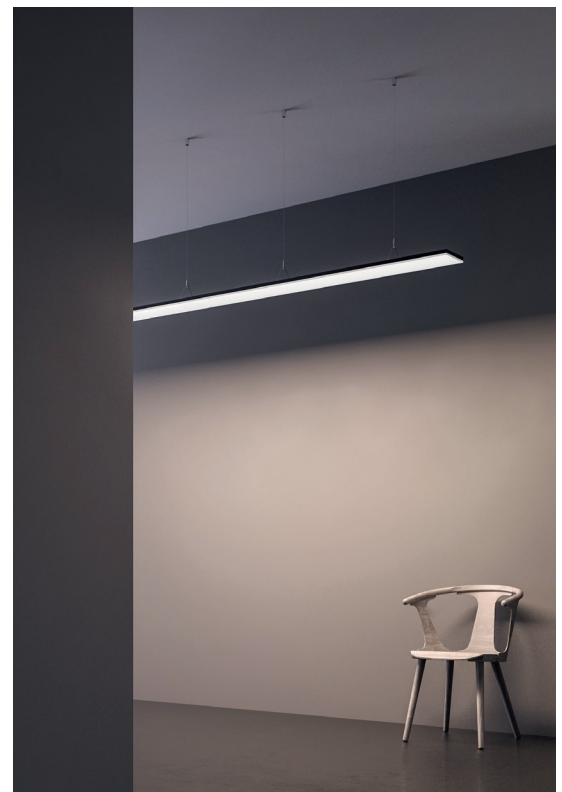

illumination
 425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
 404.876.1064 sales@illumco.com