

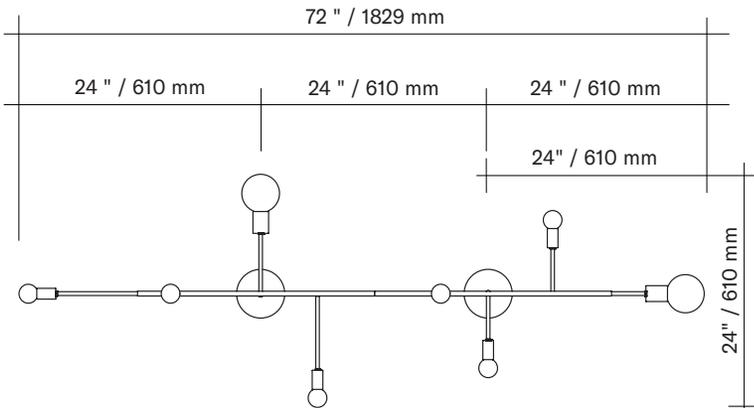


CLIFF 07

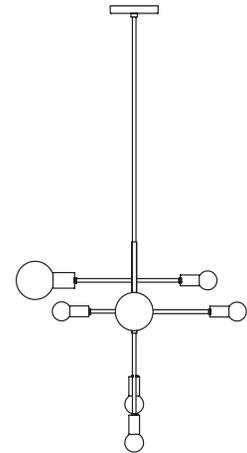


<b>Type</b>	Suspension	
<b>Materials</b>	Body:	brass (br)
	Sphere:	milk glass (G50 / G80)
	Hardware:	brass
<b>Total Height</b>	Height to be specified upon order	
<b>Weight</b>	8 lb / 3.6 Kg	
<b>Light Bulb</b>	LED (included), 2x 4.5W + 6x 3.5W	
<b>Sockets</b>	G9	
<b>Voltage</b>	120V / 240V	
<b>Dimmer</b>	Refer to our recommended list of dimmer models	
<b>Certifications</b>		
<b>Notes</b>	<ul style="list-style-type: none"> <li>• Must be installed by an electrician</li> <li>• Additional charges for modifications</li> <li>• Lead time between 7-9 weeks</li> <li>• Dimensions are approximate and may vary slightly</li> <li>• Requires two electrical boxes</li> </ul>	

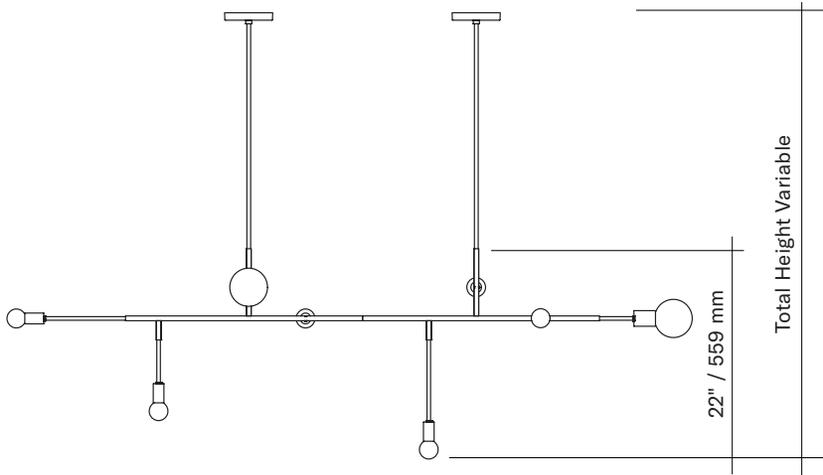

## Order Guide: SKU

Collection		Model	Finish (body + hardware)	
CLI	Cliff	07	BR	Brass
			GR	Graphite
CLI		07	BR	= CLI07BR

**example**

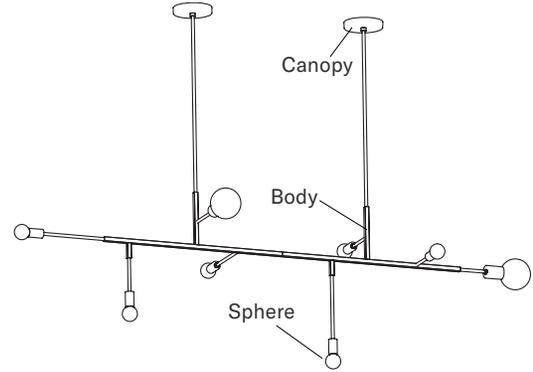

### Finish




Brass



Graphite


### Canopy

Swivel option for slanted ceiling




## LIGHT BULB & DIMMER SPECIFICATIONS

### G9 SOCKETS




Frosted  
4.5W  
100V-120V / 240V  
450 Lumens  
2700 K  
25 000 H  
CRI ≥80  
2 years warranty



Frosted  
3.5W  
100V-120V / 240V  
350 Lumens  
2700 K  
25 000 H  
CRI ≥80  
2 years warranty



### SPHERES



G80  $\varnothing \pm 3" / 80 \text{ mm}$



G50  $\varnothing \pm 2" / 50 \text{ mm}$

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good


\*Other dimmers can yield good results and we recommend conducting your own test before final installation.



## Order Guide: SKU

Collection		Model	Finish (body + hardware)	
CLI	Cliff	08	BR	Brass
			GR	Graphite
CLI		08	BR	

= CLI08BR  
example

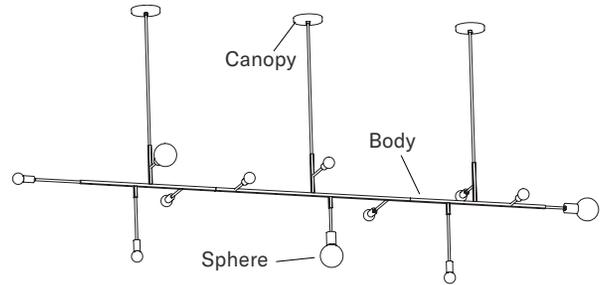

### Finish




Brass



Graphite


### Canopy

Swivel option for slanted ceiling




## Light Source & Dimmer Specifications

### G9 SOCKETS




Frosted  
4.5W  
100V-120V / 240V  
450 Lumens  
2700K  
25000H  
CRI ≥ 80  
2 years warranty



Frosted  
3.5W  
100V-120V / 240V  
350 Lumens  
2700K  
25000H  
CRI ≥ 80  
2 years warranty



### SPHERES



G80  $\varnothing \pm 3" / 80 \text{ mm}$



G50  $\varnothing \pm 2" / 50 \text{ mm}$

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.