








MILE 03

A collaboration between Lambert & Fils and Guillaume Sasseville, Mile offers a variation on the linear suspension, pared down to its simplest, asymmetrical expression, with two lines floating in surprising equilibrium. Direct and indirect light are separated by a 90° pivot, thus marking out space with light. A play on contrasts, Mile is part art installation and part utilitarian light. The use of linear LED technology and the cords clamped into the structure add to the weightless, almost levitating feel of the lamp.

- type:** suspension
- construction:** powder coated or polished aluminum body
powder coated or polished steel anchors
powder coated steel canopy
frosted acrylic diffuser
polyester cord
- specifications:** source: LED array, integrated
power consumption: 31W (120V), 27W (230V)
lumen output: LED 2700K - 2329lm (120V), 2038lm (230V)
LED 3000K - 2400lm (120V), 2100lm (230V)
light distribution: 26% Up, 74% Down
colour rendering index: ≥90 CRI
colour consistency: 3 SDCM
expected lifetime: ≥50 000h
- control:** 120/277V on/off, 0-10V or phase dimming (120V only)
220-240V: On/Off, Phase Dimming, DALI
refer to our recommended list of dimmer models
- cord length:** mains/line cord - 120" / 304 cm
non-electrical cord - 96" / 244 cm
- weight:** 5.5 lb / 2.5 kg
- certifications:**     IP20
- warranty:** 2 years

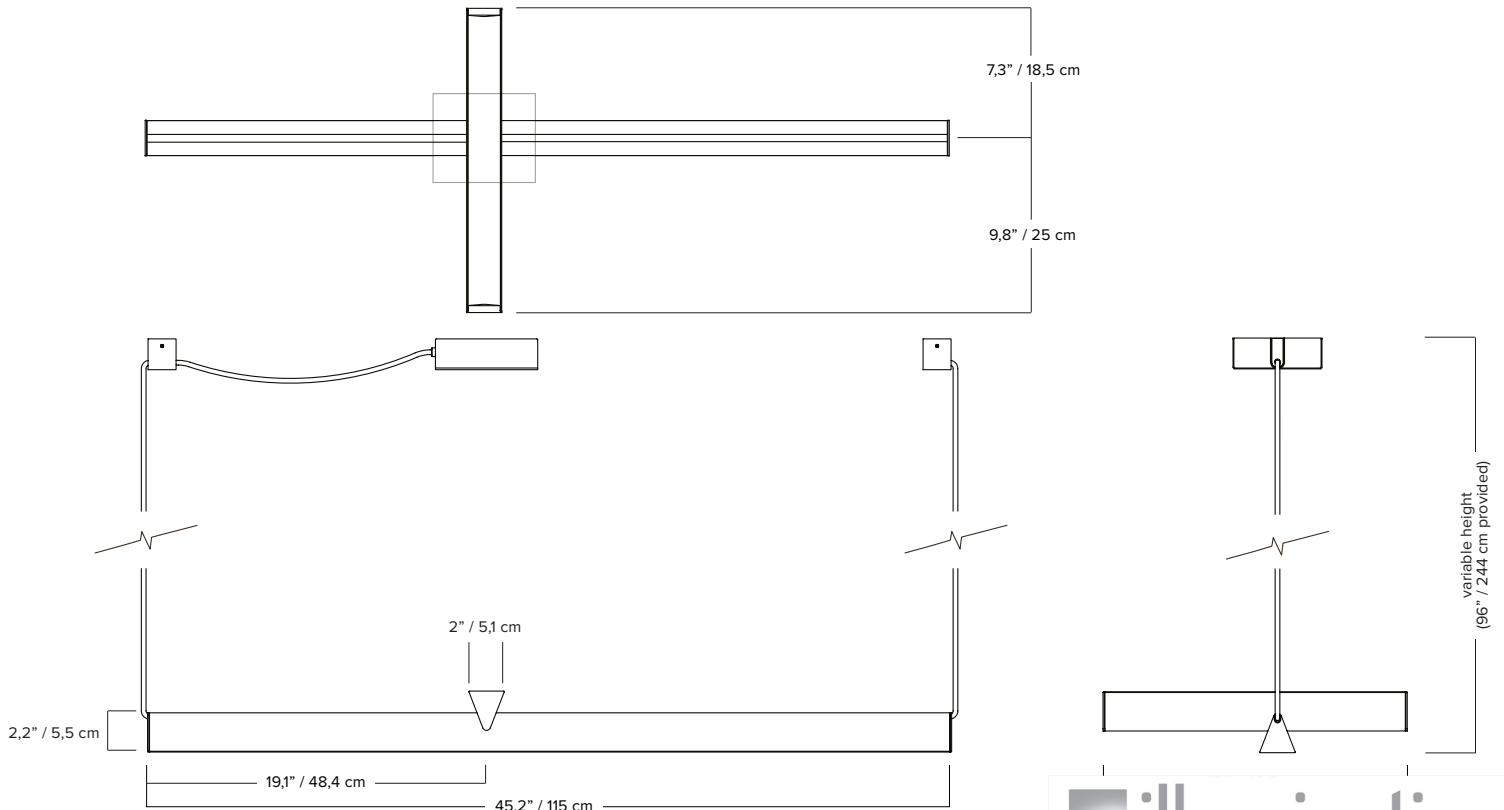

*dimension

ORDER GUIDE: SKU

| COLLECTION | MODEL | BODY, CORD AND ANCHOR | | CANOPY | | COLOUR TEMPERATURE (CCT) | | DIMMING | | |
|------------|--------------|-----------------------|-----------|----------|-----------|--------------------------|-----------|--------------------------------------|----|---------------------------|
| MIL | Mile | 03 LV | BK | black | BK | black | WL | warm light (2700K) | ZT | 0-10V dimming (120V only) |
| | | | BG | beige | BG | beige | NL | neutral light (3000K) | PH | phase dimming |
| | | | BU | burgundy | BU | burgundy | D27 | dim to warm (2700K to 2200K) | DA | DALI (230V only) |
| | | | GN | green | GN | green | D30 | dim to warm (3000K to 2200K) | | |
| | | | WH | white | WH | white | CCT | other CCT available upon request* | | |
| | | | AL | aluminum | | | | | | |
| MIL | 03 LV | BK | BK | | WL | | ZT | = MIL03LVBKKBKWLZT example | | |


* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

FINISH



NOTES

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

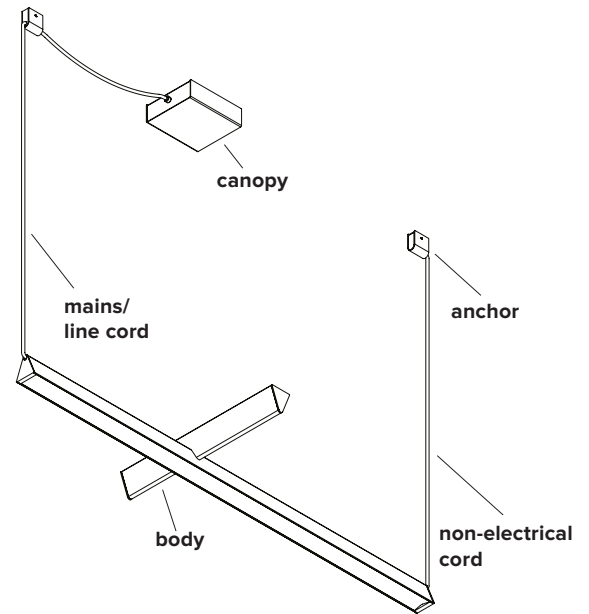

DIMMER SPECIFICATIONS

TESTED DIMMER COMPATIBILITY LIST - 120V*

Phase cut dimming (leading edge or trailing edge**)

| Dimmer brand | Model | Max level | Min level | Dimming Protocol |
|--------------|-----------|-----------|-----------|------------------|
| Cooper | SLC03P | 98% | 1% | Phase Cut |
| Leviton | IPE04 | 99% | 10% | Phase Cut |
| Leviton | VPE06 | 98% | 14% | Phase Cut |
| Lightolier | ZP260QEW | 98% | 11% | Phase Cut |
| Lutron | DVELV303P | 98% | 11% | Phase Cut |
| Lutron | MAELV600 | 98% | 18% | Phase Cut |
| Lutron | FAELV500 | 99% | 17% | Phase Cut |
| Lutron | SELV300P | 98% | 11% | Phase Cut |
| Lutron | TGCL-153P | 98% | 9% | Phase Cut |

TESTED DIMMER COMPATIBILITY LIST - 230V*

Phase cut dimming (leading edge or trailing edge**)

| Dimmer brand | Model | Max level | Min level | Dimming Protocol |
|--------------|-----------|-----------|-----------|------------------|
| Clipsal | 32E450TM | 100% | 25% | Phase Cut |
| Clipsal | 32E450UDM | 100% | 31% | Phase Cut |

Some dimmers require a minimum load, check specifications.

*Other dimmers that specify LED lamp compatibility may operate without issue. We recommend conducting your own test before final installation.

**Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

EU ENERGY LABEL

