




References



Certificates



120 - 277V



Wood shade colors

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink



REF. CUAD SM LED 21
Cuad

Components



Top diffuser
Black or White

Note: The standard top diffuser is white. Black is also available if you want no upward light diffusion.

Bottom diffuser
Matt satin acrylic



Metal canopy
Brushed Nickel
14 x 4,6 x 2"

Electrical cable
Transparent 8 ft drop




Steel cable
4 x 8 ft drop



Box size
35 x 35 x 13"

Box volume
9,3 ft³

Weight
Gross - 28,7 Lb
Net - 16,5 Lb

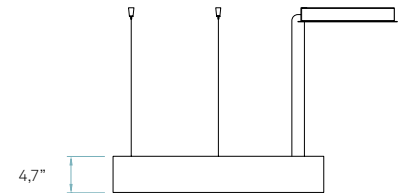

Linear Module
8 x 5,5 W 350mA
2700 K / 4000 K

(Be sure to specify the LED color temperature)




Driver



EFORE
1 unit - Ref. RCL050-1400B

Driver housed in canopy.

Compatible with TRIAC / ELV (only 120V) and 0-10V (120-277V)

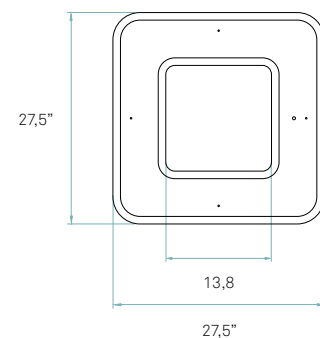

Details

Input Voltage	Watt.	CCT	Luminous Flux *	CRI	Lifetime (L70)
120 - 277V	50 W	2700 K	3521 lm	90	40000h
		4000 K	4073 lm		

* Measurements taken using white shades, Veneer Ref: 20 Ivory White