**REF.**

I-LN S 120 LED DIM0-10V UL
I-LN S 120 LED DIMTRIAC UL

LIGHT SOURCE

120 - 277V: Dimmable 0-10V & TRIAC

Driver:

Constant Voltage 24V

LED Integrated:

Led strip

2.700K / 4.000K, CRI>90, 30W, 50-60Hz, 1434lm*

*Measurements obtained by theoretical calculations
at LZf (2.700K)

PACKAGING**Box Size:****Shade**

Box 1: 52 x 5 x 5" | 0,7 ft³ | 8,8 Lb

Canopy

Box 2: 25 x 4 x 2" | 0,1 ft³ | 8,8 Lb

Weight: Gross - 17,6 Lb | Net - 9,7 Lb

MATERIALS & COMPONENTS








Wood Veneer Shade


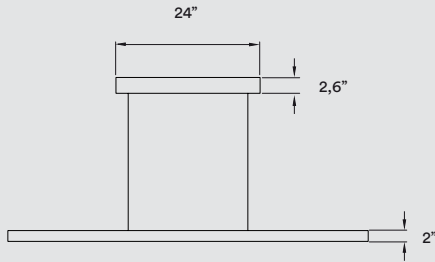
Matt Satin Acrylic Bottom Diffuser

Black Metal Canopy: 24 x 1,6 x 2,6"

2 Black Electrified Cables: 8 ft drop

FINISHES**WOOD VENEER**

- | | | | |
|---|-------------------|---|--------------|
|  | 20 Ivory White |  | 28 Blue |
|  | 21 Natural Cherry |  | 29 Grey |
|  | 22 Natural Beech |  | 31 Chocolate |
|  | 24 Yellow |  | 33 Pale Rose |
|  | 25 Orange |  | 34 Sea Blue |
|  | 26 Red | | |

**REF.**

I-LN S 150 LED DIM0-10V UL
I-LN S 150 LED DIMTRIAC UL

LIGHT SOURCE

120 - 277V: Dimmable 0-10V & TRIAC

Driver:

Constant Voltage 24V

LED Integrated:

Led strip

2.700K / 4.000K, CRI>90, 40W, 50-60Hz, 1808lm*

*Measurements obtained by theoretical calculations
at LZf (2.700K)

PACKAGING**Box Size:**

Shade

Box 1: 64 × 5 × 5" | 0,8 ft³ | 13,2 Lb

Canopy

Box 2: 25 × 4 × 2" | 0,1 ft³ | 8,8 Lb

Weight: Gross - 22 Lb | Net - 10,5 Lb

MATERIALS & COMPONENTS

Wood Veneer Shade

Matt Satin Acrylic Bottom Diffuser

Black Metal Canopy: 24 × 1,6 × 2,6"

2 Black Electrified Cables: 8 ft drop

FINISHES**WOOD VENEER**

- | | | | |
|---|-------------------|--|--------------|
|  | 20 Ivory White |  | 28 Blue |
|  | 21 Natural Cherry |  | 29 Grey |
|  | 22 Natural Beech |  | 31 Chocolate |
|  | 24 Yellow |  | 33 Pale Rose |
|  | 25 Orange |  | 34 Sea Blue |
|  | 26 Red | | |