



References



Certificates




120 - 277V

ADA Compliant



Wood shade colors

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink

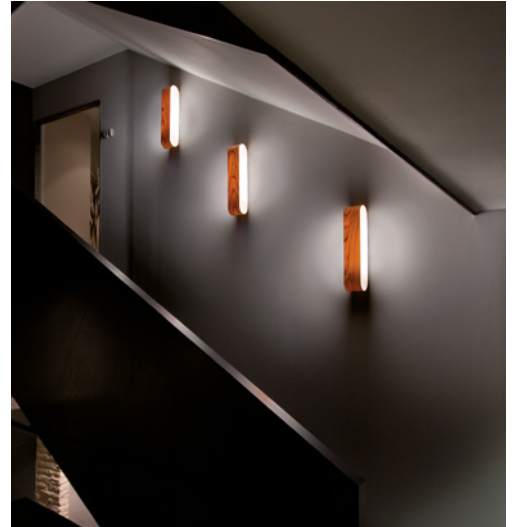

REF. IA 21
I-Club Small


Components



Bottom & Upper diffuser
Matt satin acrylic



Back plate
White metal enamel



Box size
20 x 12 x 9"

Box volume
1,2 ft³

Weight
Gross - 5,3 Lb
Net - 2,2 Lb



Recommended tubes (Not Included)



T5






Linear Fluorescent
2 x 8 W



Ballast

NON DIMMABLE - TRIDONIC
1 unit - Ref. WH41-UNV-L

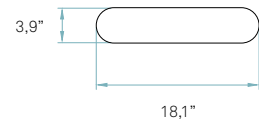

**REF.**

I ASL LED DIM UL

LIGHT SOURCEADA Compliant 

120 - 277V: Dimmable 0-10V & TRIAC

Driver:

Constant Current 900mA

LED Integrated:

Led module 900mA

2700K / 4000K, CRI80, 60W, 50-60Hz

PACKAGING

Box Size: 72 x 15 x 10"

Box Volume: 5,9 ft³

Weight: Gross - 24 Lb | Net - 8,4 Lb



MATERIALS & COMPONENTS

Wood Veneer Shade

Matt Satin Acylic Bottom & Upper Diffuser


White Enamel Metal Back Plate

FINISHES**WOOD VENEER**

- | | | | |
|---|-------------------|--|--------------|
|  | 20 Ivory White |  | 28 Blue |
|  | 21 Natural Cherry |  | 29 Grey |
|  | 22 Natural Beech |  | 30 Turquoise |
|  | 24 Yellow |  | 31 Chocolate |
|  | 25 Orange |  | 33 Pale Rose |
|  | 26 Red | | |



REF. I AG A LED 25
I-Club Large

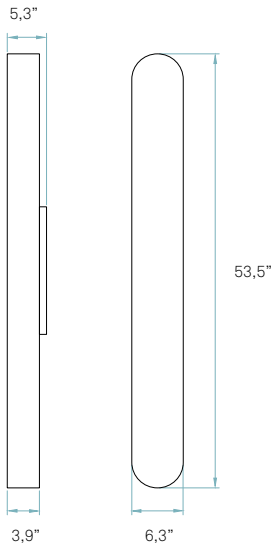

References



Certificates



120 - 277V




Wood shade colors

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink


Components



Frontal diffuser
Matt satin acrylic



Back plate
Chrome



Box size
12 x 12 x 60"

Box volume
5,2 ft³

Weight
Gross - 17,6 Lb
Net - 8,8 Lb



Linear Module
3 x 10,8 W 900mA
2700 K / 4000 K

(Be sure to specify the LED color temperature)



Driver



ERP
1 unit - Ref. ESS040W-0900-42

Details

Input Voltage	Watt.	CCT	Luminous Flux	CRI	Lifetime (L70)
120 - 277V	36 W	2700 K 4000 K	2266 lm 2394 lm	90	40000h