



References



TOT4 S LED DIM UL

Certificates




120 - 277V



Wood shade colors

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink

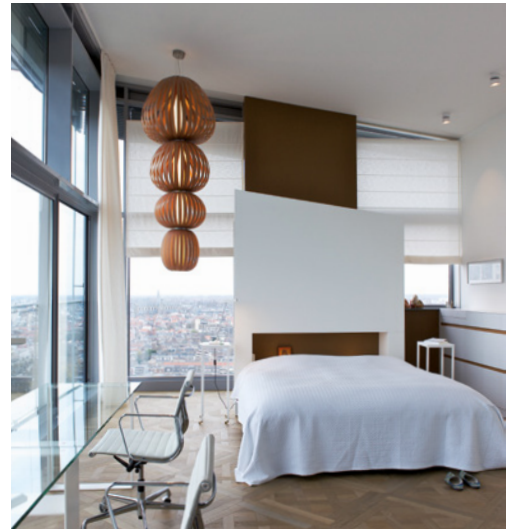

REF. TOT4 S LED 21
Totem 4 - Medium

Components

Packaging



Metal canopy
Brushed Nickel
ø 5,5" - disc ø 7,9"

Electrical cable
Transparent 8 ft drop

Steel cable
3 x 8 ft drop




Box size
Shades
box 1: 40 x 40 x 33"
30,3 ft³ | 22,3 Lb
box 2: 30 x 30 x 27"
14,1 ft³ | 12,3 Lb
box 3: 26 x 26 x 20"
8 ft³ | 15 Lb
box 4: 20 x 20 x 24"
5,7 ft³ | 9 Lb

Electrical kit
box 5: 72 x 15 x 10"
5,9 ft³ | 22,9 Lb

Weight
Gross - 81,5 Lb
Net - 29,3 Lb



Required
Shade to base mount
Difficulty: *****

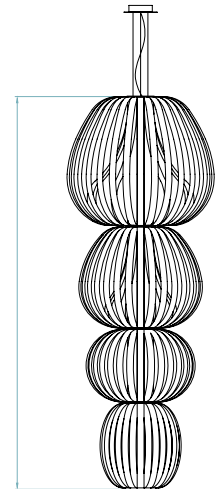

Linear Module
28 x 5,5 W 350mA
2700 K / 4000 K

(Be sure to specify the LED color temperature)



Driver


EFORE
3 units - Ref. RCL030-0900B

Driver housed in fixture.

Compatible with TRIAC / ELV (only 120V) and 0-10V (120-277V)

Details



Input Voltage	Watt.	CCT	Luminous Flux	CRI	Lifetime (L70)
120 - 277V	90 W	2700 K 4000 K	N/A	90	40000h



Fluorescent Totem / MEDIUM SUSPENSION
by Burkhard Dämmer & Mariví Calvo



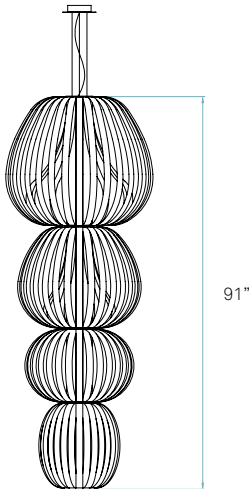

REF. TOT3 S 20, 28 & TOT4 S 20
Totem 3 - Small & Totem 4 - Medium



ø 33,8"

References

-  TOT4 S MULTIV UL
-  TOT4 S DIM UL



Certificates



120 - 277V



Wood shade colors

-  20 Ivory White
-  21 Natural Cherry
-  22 Natural Beech
-  24 Yellow
-  25 Orange
-  26 Red
-  28 Blue
-  29 Grey
-  30 Turquoise
-  31 Chocolate
-  32 Pink


Components



Metal canopy
Brushed Nickel
ø 5,5" - disc ø 7,9"

Electrical cable
Transparent 8 ft drop

Steel cable
3 x 8 ft drop



Box size
Shades
box 1: 40 x 40 x 33"
30,3 ft³ | 24 Lb
box 2: 30 x 30 x 27"
14,1 ft³ | 15,7 Lb
box 3: 26 x 26 x 20"
8 ft³ | 13 Lb
box 4: 20 x 20 x 24"
5,7 ft³ | 8,8 Lb

Electrical kit
box 5: 72 x 15 x 10"
5,9 ft³ | 23,8 Lb

Weight
Gross - 85,1 Lb
Net - 30,7 Lb



Required
Shade to base mount
Difficulty: *****

Recommended tubes (Not Included)



T5



Linear Fluorescent
2 x 14 W
2 x 35 W



Ballast

NON DIMMABLE - FULHAM
2 units - Ref. RH14-UNV-235-LT5

DIM - LUTRON - ECOSYSTEM
1 units - Ref. EC5T514JUNV2
2 units - Ref. EC5T535JUNV1
Standard fit: LUTRON
For other options, please specify dimming needs.