



References



Certificates



120 - 277V



Wood shade colors

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink



Components



**Top diffuser**  
Black or White

**Note:** The standard top diffuser is white. Black is also available if you want no upward light diffusion.

**Bottom diffuser**  
Matt satin acrylic



**Metal canopy**  
Brushed Nickel  
14 x 4,6 x 2"

**Electrical cable**  
Transparent 8 ft drop



**Steel cable**  
4 x 8 ft drop




**Box size**  
31 x 31 x 17"

**Box volume** 9,3 ft<sup>3</sup>

**Weight**  
Gross - 22,3 Lb  
Net - 11,5 Lb

REF. X SM LED 24, 26 & X SG 24, 26  
X-Club

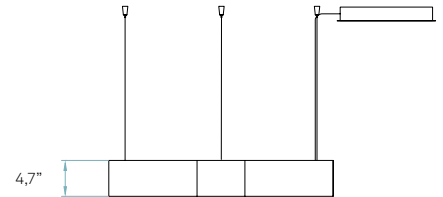

**Linear Module**  
4 x 8,1 W 700mA  
2700 K / 4000 K

(Be sure to specify the LED color temperature)




**Driver**



**EFORE**  
1 unit - Ref. RCL050-1400B

Driver housed in canopy.

**Compatible with TRIAC / ELV (only 120V) and 0-10V (120-277V)**

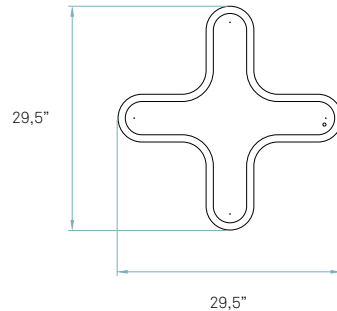

Details

Input Voltage	Watt.	CCT	Luminous Flux *	CRI	Lifetime (L70)
120 - 277V	35 W	2700 K	2600 lm	90	40000h
		4000 K	2945 lm		



\* Measurements taken using white shades, Veneer Ref: 20 Ivory White

# Fluorescent X-Club

by Burkhard Dämmer



REF. X SM 24 & 26  
X-Club

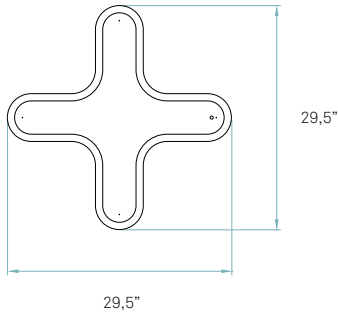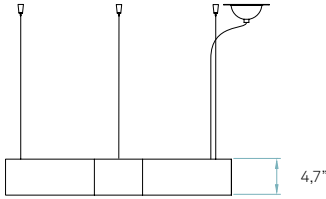

References

- X SM MULTIV UL
- X SM DIM UL

Certificates

- cUL US
- 120 - 277V



Wood shade colors

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink

Components



**Top diffuser**  
Black or White

**Note:** The standard top diffuser is white. Black is also available if you want no upward light diffusion.

**Bottom diffuser**  
Matt satin acrylic




**Metal canopy**  
Brushed Nickel  
ø 3,9" - disc ø 5,5"

**Electrical cable**  
Transparent 8 ft drop



**Steel cable**  
4 x 8 ft drop



**Box size**  
31 x 31 x 17"

**Box volume**  
9,3 ft<sup>3</sup>

**Weight**  
Gross - 20,3 Lb  
Net - 9 Lb

Recommended tubes (Not Included)



T5



Linear Fluorescent  
2 x 24 W



**Ballast**

**NON DIMMABLE - FULHAM**  
1 unit - Ref. RHA-UNV-239-LT5

**DIM - LUTRON - ECOSYSTEM**  
1 units - Ref. EC5T524JUNV2  
Standard fit: LUTRON  
For other options, please specify dimming needs.