




**Ihana**  
Customized configuration

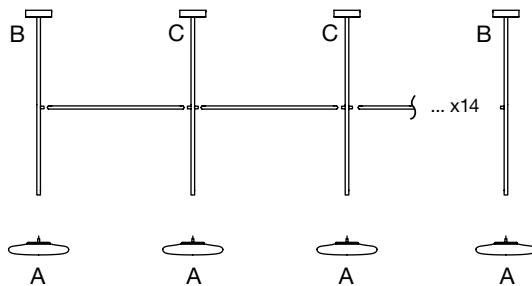

Examples:

Configuration x4: 4A + 1B + 2C  
 Configuration x5: 5A + 1B + 3C  
 Configuration x6: 6A + 1B + 4C  
 Configuration x7: 7A + 1B + 5C  
 Configuration x8: 8A + 1B + 6C  
 Configuration x9: 9A + 1B + 7C  
 Configuration x10: 10A + 1B + 8C  
 Configuration x11: 11A + 1B + 9C  
 Configuration x12: 12A + 1B + 10C  
 Configuration x13: 13A + 1B + 11C  
 Configuration x14: 14A + 1B + 12C

Lacquered steel structure which supports an opal blown glass shade.

**Structure**

● Black (RAL 9005)

**Diffuser**

○ White

**Ihana**

Light source:  
 LED SMD 700mA 7.8W 2700K CRI90 609lm  
 Luminaire:  
 100 - 120 VAC TRIAC 14W 331lm

Light source DTW:  
 LED SMD 700mA 7.8W 2200-3000K CRI90  
 Luminaire DTW:  
 100 - 120 VAC TRIAC 14W

dimmable

Current input from any canopy.

Dimming protocols:

Phase cut (Triac)

Dim to warm from 1800K to 3000K (Triac)

[Watch the video](#)

massetusa@masset.com  
[www.masset.com](http://www.masset.com)



\*Under approval process.

Dry locations only

Ihana can be used to create light compositions. This is made possible by its structure, which can be extended to include 14 diffusers, connected to a single point of light.