


# ZIRKOL – O

ZIRKOL -O is a family of oval suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version with high flux and different colour temperatures.

Driver and dimmer interface included

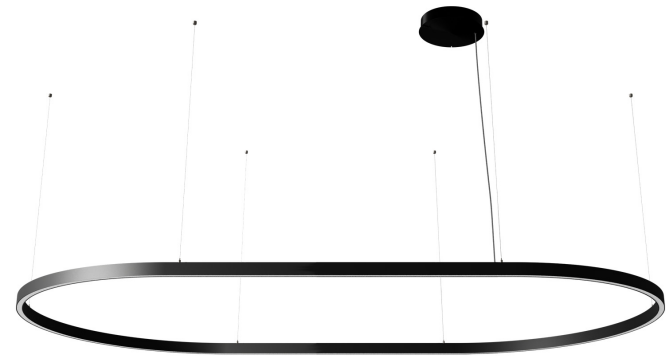

# OVAL 78.7"X39.4" | DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	74W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	4282lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x39.4"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled


## Codes

UZRO16A20G15DBO  
 UZRO16A20G15DNE  
 UZRO16A20G15DOR

## Structure

matt white  
 matt black  
 matt gold

## Certificazioni

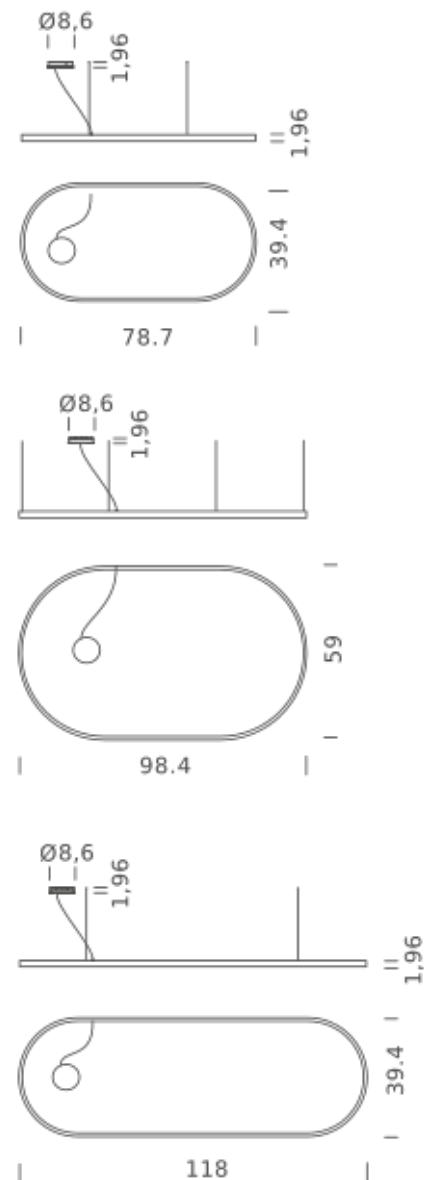

# OVAL 78.7"X39.4" | DOWNLIGHT - 3000K

## LAMPING

Source	Linear LED
Total power	74W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	4533lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x39.4"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled


## Codes

UZRO16A20G15WBO  
UZRO16A20G15WNE  
UZRO16A20G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

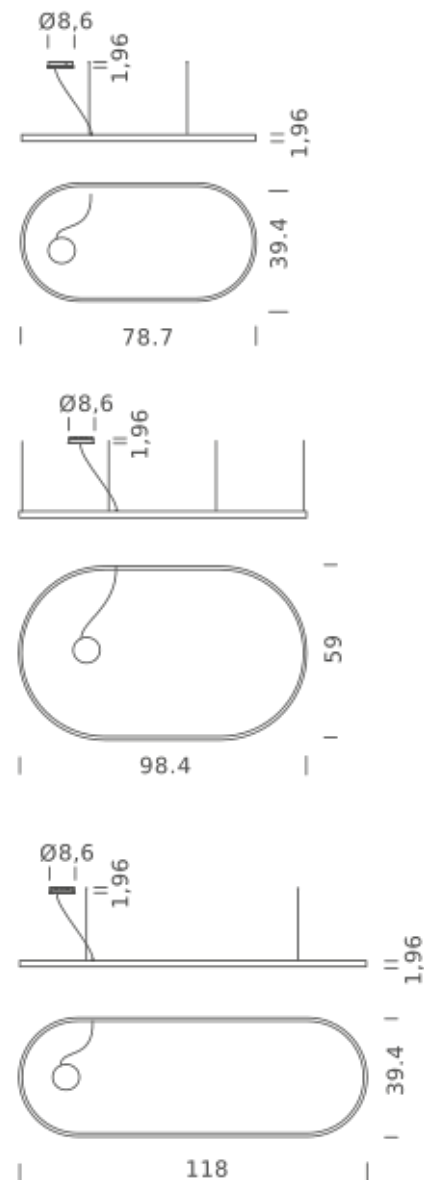

# OVAL 78.7"X39.4" | DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	74w
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	5037lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x39.4"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled


## Codes

UZRO16A20G15NBO  
UZRO16A20G15NNE  
UZRO16A20G15NOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

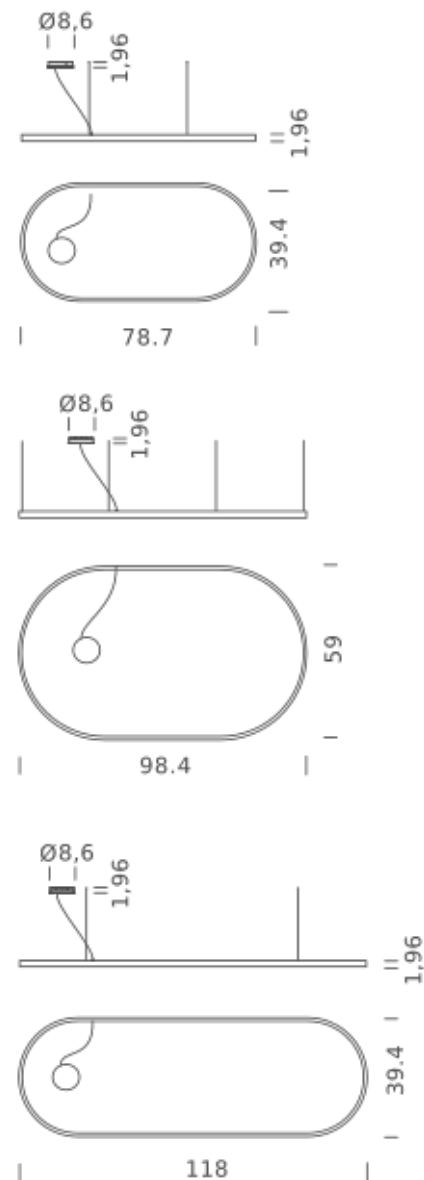

# OVAL 118"X39.4" | DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	98W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	5948lm
Typ CRI	90
IP class	IP40
Dimensions	118"x39.4"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled


## Codes

UZRO16A30G15DBO  
 UZRO16A30G15DNE  
 UZRO16A30G15DOR

## Structure

matt white  
 matt black  
 matt gold

## Certificazioni

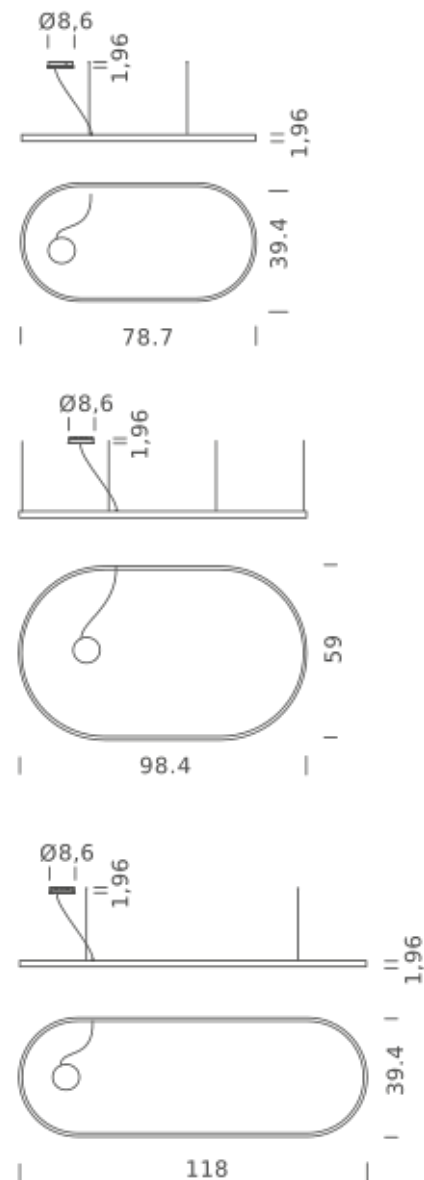

# OVAL 118"X39.4" | DOWNLIGHT - 3000K

## LAMPING

Source	Linear LED
Total power	98W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	6297lm
Typ CRI	90
IP class	IP40
Dimensions	118"x39.4"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled


## Codes

UZRO16A30G15WBO  
 UZRO16A30G15WNE  
 UZRO16A30G15WOR

## Structure

matt white  
 matt black  
 matt gold

## Certificazioni

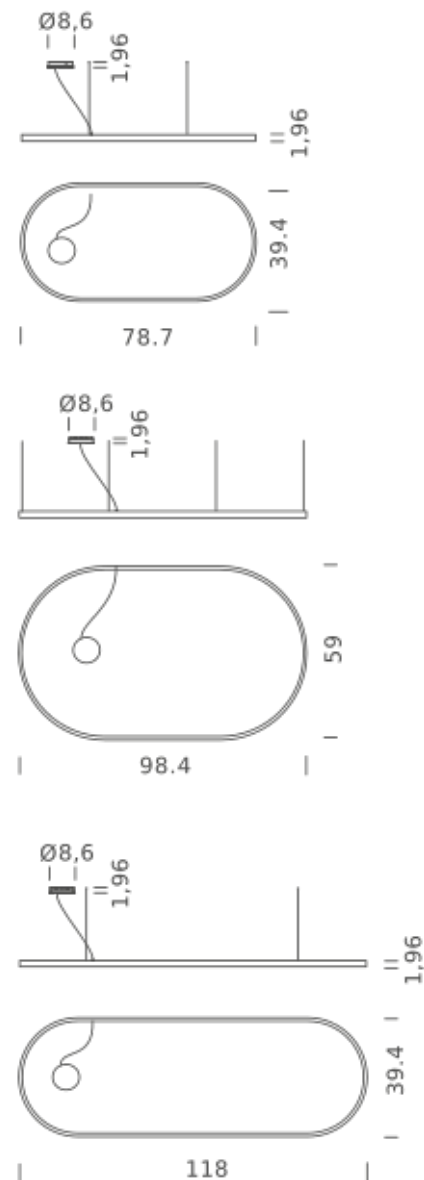

# OVAL 118"X39.4" | DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	98W
Emission	Diffused oriented
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	6997lm
Typ CRI	90
IP class	IP40
Dimensions	118"x39.4"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled


## Codes

UZRO16A30G15NBO  
 UZRO16A30G15NNE  
 UZRO16A30G15NOR

## Structure

matt white  
 matt black  
 matt gold

## Certificazioni

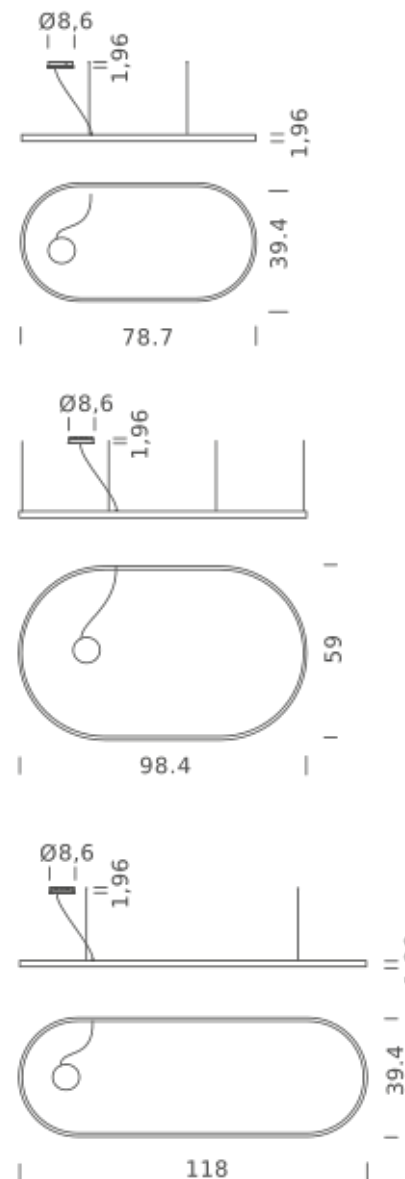

# OVAL 98.4"X59" | DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	97W
Emission	Diffused oriented
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	5589lm
Typ CRI	90
IP class	IP40
Dimensions	98.4"x59"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   6 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped in 4 pieces


## Codes

UZRO16B25G15DBO  
 UZRO16B25G15DNE  
 UZRO16B25G15DOR

## Structure

matt white  
 matt black  
 matt gold

## Certificazioni

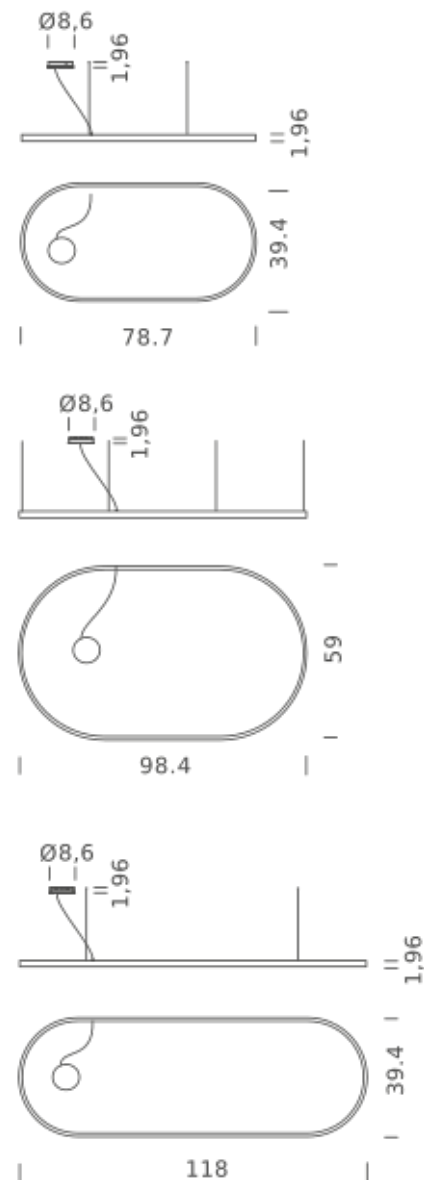



# OVAL 98.4"X59" | DOWNLIGHT - 3000K

## LAMPING

Source	Linear LED
Total power	97W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	5918lm
Typ CRI	90
IP class	IP40
Dimensions	98.4"x59"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   6 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped in 4 pieces


## Codes

UZRO16B25G15WBO  
UZRO16B25G15WNE  
UZRO16B25G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

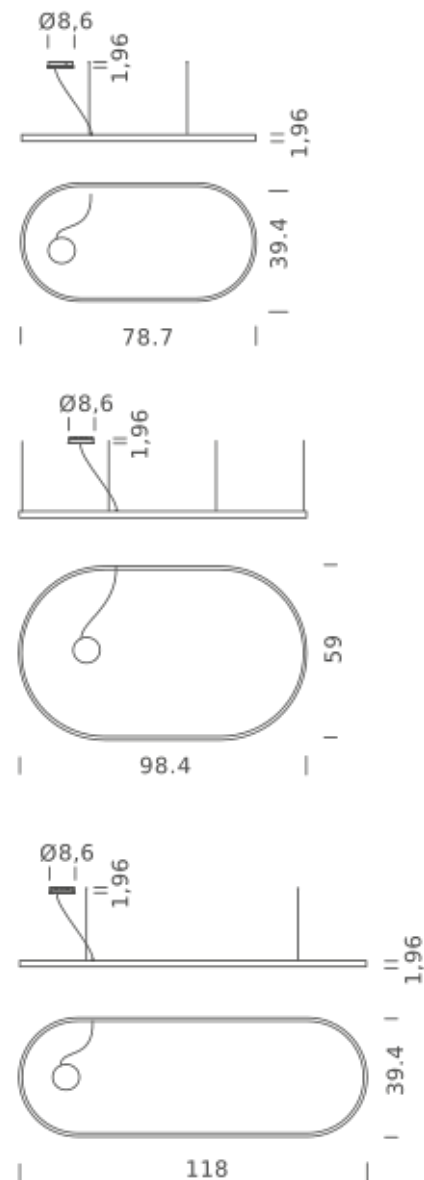

# OVAL 98.4"X59" | DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	97W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	6576lm
Typ CRI	90
IP class	IP40
Dimensions	98.4"x59"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   6 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped in 4 pieces

## Codes

UZRO16B25G15NBO  
UZRO16B25G15NNE  
UZRO16B25G15NOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

