

Guise

Design by Stefan Diez.

Reference

2288.

Application

Pendants

Installation type

Surface mounted

Description

The pendant light with 15 3/4 inch diameter borosilicate glass providing a nuanced and elegant light over work surfaces, dining areas, and meeting tables.

Diffuser

Borosilicate glass diffuser

Materials

Canopy: Steel


Body: Aluminum

Finishes



2288-18 Graphite (ADAPTA RF 9913 WX)

Sketch



Electrical characteristics

1 x LED STRIP 24V 18W

Total 18.0 W



VIBIA



Light source: 3000K CRI >90 1325 lm 73.61 lm/W

Driver included: CV - Constant Voltage 90-305V 50/60Hz

Electronic dimming: 1-10V

Optional dimming: DALI or Lutron ECO

Remote dimming: DALI or Lutron ECO

Technical characteristics

- The glass is made of borosilicate. It is typical for the glass to have small air bubbles, some inclusions and tiny scratches. These do not affect the quality or the resistance of the glass.


Installation and assembly

Please see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 38.65 lm/W

Coordinate system : CG

Total flux : 868.47 lm

Maximum value : 348.73 cd


Light position : C=0.00 G=5.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

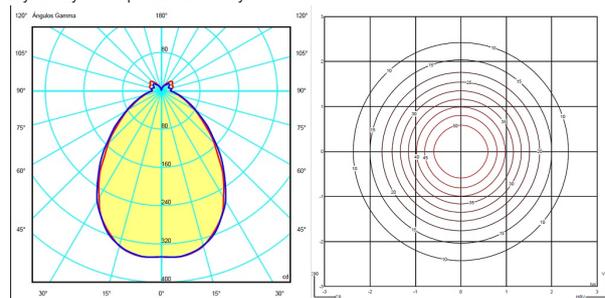

Certificates



illuminations

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305

404.876.1064

sales@illumco.com