

Guise

Design by Stefan Diez.

Reference

2298.

Application

Ceiling Fixtures

Installation type

Surface mounted

Description

Ceiling LED lamp. The light is diffused in an almost invisible manner through the glass and only emerges through the striations etched on the surface, diffusing the light as if by magic.

Diffuser

Borosilicate glass diffuser

Materials


Canopy: Steel
Body: Aluminum

Finishes



2298-18 Graphite (ADAPTA RF 9913 WX)

Sketch



Electrical characteristics

1 x LED STRIP 24V 18W

Total 18.0 W



VIBIA



Light source: 3000K CRI >90 1325 lm 73.61 lm/W

Driver included: CV - Constant Voltage 90-305V 50/60Hz

Electronic dimming: 1-10V

Optional dimming: DALI or Lutron ECO

Remote dimming: DALI or Lutron ECO

Technical characteristics

- The glass is made of borosilicate. It is typical for the glass to have small air bubbles, some inclusions and tiny scratches. These do not affect the quality or the resistance of the glass.

Installation and assembly

Please see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 38.65 lm/W

Coordinate system : CG

Total flux : 868.47 lm

Maximum value : 348.73 cd


Light position : C=0.00 G=5.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

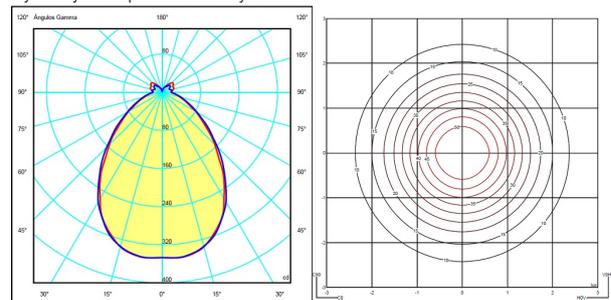

Certificates



illuminations

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com