

Halo

Design by Martin Azua.

Reference

2350.

Application

Pendants

Installation type

Surface mounted

Description

The Halo Jewel hanging lamps, configuration featuring circular piece, is a Martín Azúa design. The Halo Jewel collection presents light as a precious element that is expressed in lightweight structures suspended in space.

Diffuser

Acrylic diffuser

Materials

Diffuser: Acrylic
LED support: Aluminum
Pendant structure: Steel
Canopy: Steel

Finishes




2350-11 Black (NCS S 8500N)



2350-20 Gold finish (Gold)

Sketch



Electrical characteristics

1 x LED STRIP 24V 23W

Total 23.0 W



VIBIA



Light source: 3000K CRI >80 2274.17 lm 98.87 lm/W

Fixture: 1726.78 lm 62.66 lm/W

Driver included: CV - Constant Voltage 120-277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: DALI or Lutron ECO

Technical characteristics

- Surface Mounted


Installation and assembly

Please see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 100 %

Coordinate system : CG

Total flux : 1726.78 lm

Maximum value : 253.36 cd

Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

Certificates




425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com

Halo

Design by Martin Azua.

Reference

2351.

Application

Pendants

Installation type

Surface mounted

Description

The Halo Jewel hanging lamps, configuration featuring circular piece, is a Martín Azúa design. The Halo Jewel collection presents light as a precious element that is expressed in lightweight structures suspended in space.

Diffuser

Acrylic diffuser

Materials

Diffuser: Acrylic
LED support: Aluminum
Pendant structure: Steel
Canopy: Steel

Finishes




2351-11 Black (NCS S 8500N)



2351-20 Gold finish (Gold)

Sketch




Electrical characteristics

1 x LED STRIP 24V 23W

Total 23.0 W



VIBIA

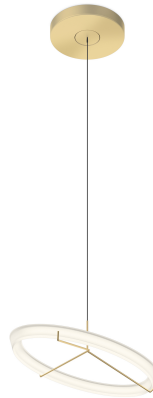

Light source: 3000K CRI >80 2274.17 lm 98.87 lm/W

Fixture: 1726.78 lm 62.66 lm/W

Driver included: CV - Constant Voltage 120-277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: DALI or Lutron ECO

Technical characteristics

- Surface Mounted


Installation and assembly

Please see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 100 %

Coordinate system : CG

Total flux : 1726.78 lm

Maximum value : 253.36 cd

Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

Certificates




425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com