

Halo

Design by Martin Azua.

VIBIA

Reference

2360.

Application

Wall Fixtures

Installation type

Surface mounted

Description

Wall sconce. Through its double methacrylate cover, it achieves a diffused quality lighting using LED technology that remains hidden. Material converted into light almost magically.

Diffuser

PMMA diffuser

Materials

Diffuser: Acrylic
LED support: Aluminum
Wall support: Aluminum

Finishes




2360-11 Black (NCS S 8500N)



2360-13 Grey L1 (NCS S 1000-N)


Sketch



Electrical characteristics

1 x LED STRIP 24V 15,3W

Total 15.3 W

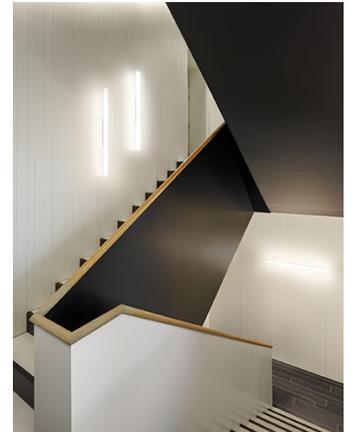

Light source: 3000K CRI >80 1528.04 lm 99.87 lm/W

Fixture: 1157.34 lm 75.64 lm/W

Driver included: CV - Constant Voltage 120-277V 50/60Hz

Electronic dimming: NO DIMMING

Remote dimming: DALI or Lutron ECO

Technical characteristics

- Surface Mounted

Installation and assembly

Please see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 100 %

Coordinate system : CG

Total flux : 1157.34 lm

Maximum value : 233.07 cd

Light position : C=0.00 G=65.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

Certificates

