

Structural

Design by Arik Levy.

Reference

2645.

Application

Ceiling Fixtures

Installation type

Surface mounted

Description

Ceiling light where different cubic volumes meet or expand to provide flexible solutions, maintaining spatial order. Two grey finishes integrate with a room's architecture.

Diffuser

Polycarbonate diffuser

Materials


Body: Aluminum
Diffuser: Polycarbonate
Profile: Aluminum

Finishes

 **2645-15** Grey L2 (NCS S 2500-N)

 **2645-21** Grey D1 (NCS S 7000-N)

Sketch



Electrical characteristics

1 x LED PLATE 24V 9W
AND
1 x LED PLATE 24V 15W
AND
1 x LED PLATE 24V 30W

Total 54.0 W



VIBIA



Light source: 3000K CRI >90 6018 lm 118 lm/W

Driver included: CV - Constant Voltage 90-303V 50/60Hz

Electronic dimming: 1-10V

Optional dimming: DALI

Remote dimming: DALI or Lutron ECO

Technical characteristics

- Main input by the biggest box


Installation and assembly

Please see the installation manual

Light distribution

General lighting - opaque shade

Fixture suitable for general ambient illumination, distributing light mainly upward and/or downward.



Photometric data

Efficiency : 69.34 lm/W

Coordinate system : CG

Total flux : 5200.43 lm

Maximum value : 2251.45 cd


Light position : C=0.00 G=0.00

Symmetry on the planes : Asymmetric

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

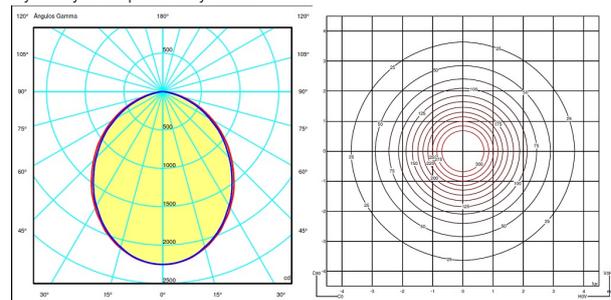

Certificates





425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com