

Tempo

Design by Lieve Altherr.

Reference

5761.

Application

Wall Fixtures

Installation type

Recessed

Description

Wall lamp. An adjustable rod emerges from the base attached to the wall, with blown glass diffuser and a tensing cable that permits precise adjustment of the height of the glass tulip. Connection without a plug. LED light source.

Diffuser

Blown-glass diffuser

Materials

Body: Steel

Diffuser: Blown-glass

LED support: Aluminum

Finishes



5761-18 Graphite (ADAPTA RF 9913 WX)




5761-35 Brick (NCS S 4040-Y70R)



5761-62 Green (NCS S 3010-G20Y)

Sketch




Electrical characteristics

1 x LED 4W 350mA

Total 4.0 W



VIBIA

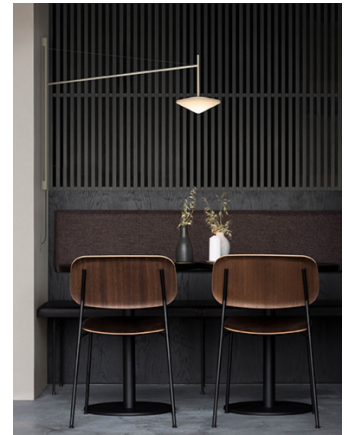

Light source: 2700K CRI >90 440.81 lm 110 lm/W

Fixture: 302.04 lm 75.4 lm/W

Driver included: CC - Constant Current 350 mA 120~277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: DALI or TRIAC

Technical characteristics

- Recessed


Installation and assembly

Please see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 100%

Coordinate system : CG

Total flux : 302.04 lm

Maximum value : 203.44 cd

Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

Certificates




425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com