

# Top

Design by Ramos & Bassols.

## Reference

**1170.**

## Application

Ceiling Fixtures

## Installation type

Surface mounted

## Description

Top 1170 is a ceiling /wall lamp. It features simple lines that blend in with the surfaces attached. The light reflected by the glass diffuser is confined within the rosette as if the light were framed.

## Diffuser

Matte triplex opal blown-glass diffuser


## Materials

Body: Aluminum  
Canopy: Aluminum  
Diffuser: Opal blown-glass

## Finishes

-  **1170-10** White (NCS S 0300-N)
-  **1170-36** Soft Pink (NCS S 1010-Y50R)
-  **1170-40** Blue L1 (NCS S 3010-B)
-  **1170-47** Green L1 (NCS S 4005-G80Y)

## Sketch

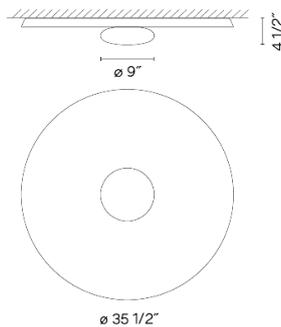

## Electrical characteristics

3 x LED 13,4W 700mA

Total 40.2 W



# VIBIA



**Light source:** 2700K CRI >90 3300 lm 82.08 lm/W

**Driver included:** CC - Constant Current 700 mA 110~127 V 50/60Hz

**Electronic dimming:** DALI 1-10V Push


## Installation and assembly

Please see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 66.69 lm/W

Coordinate system : CG

Total flux : 3103.46 lm

Maximum value : 813.96 c


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

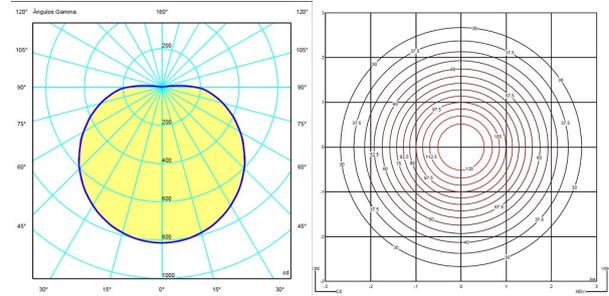

## Certificates

