


PIPELINE LINEAR 125.2

CAINE HEINTZMAN / 2013

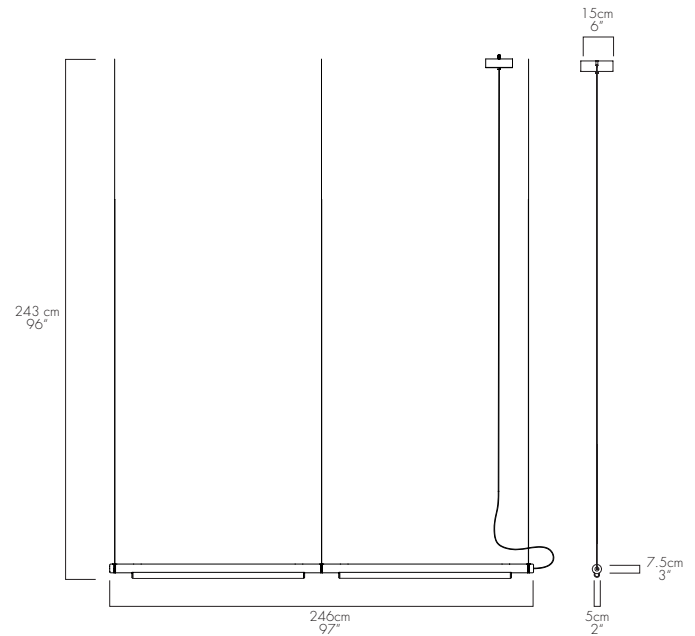

DESCRIPTION

The Pipeline 125.2 linear LED pendant demonstrates two consecutively joined Pipeline 125 Sections.

The Pipeline Linear series enables limitless length installations by joining Pipeline Sections (125 or 40) using a standardized connecting collar. For special inquiries please contact info@andlight.ca.

MOUNTING TYPE

Pendant

MATERIALS

Aluminum body
Acrylic diffuser
Linear LED
Aircraft cable

MANUFACTURED

Canada

DIMENSIONS

246 x 7.5 x 5cm / 97" x 3" x 2"

FACTORY DROP LENGTH

243cm / 96"

* custom length available upon request.

FINISHES


Black



White



Copper



Brass



Polish / Copper



Black / Copper



ELECTRICAL

42W Linear Led

70 000 hrs lifetime

2700K / 4100K

91 CRI

120V input 60Hz (*220V & 277V available upon request).

24V DC

Low Voltage Magnetic Driver

Integral 24V power supply included (located in canopy).

*0-10 Electronic Dimming available upon request

*Other colour temperatures available upon request

CERTIFICATIONS



PIPELINE 125.2	FINISH	TEMP.	CODE	
	Black	WW / 2700K	PIP-125.2-P-WW-BK-024	<input type="checkbox"/>
	Black	NW / 4100K	PIP-125.2-P-NW-BK-024	<input type="checkbox"/>
	Copper	WW / 2700K	PIP-125.2-P-WW-CP-024	<input type="checkbox"/>
	Copper	NW / 4100K	PIP-125.2-P-NW-CP-024	<input type="checkbox"/>
	Polish / Copper	WW / 2700K	PIP-125.2-P-WW-PC-024	<input type="checkbox"/>
	Polish / Copper	NW / 4100K	PIP-125.2-P-NW-PC-024	<input type="checkbox"/>
	White	WW / 2700K	PIP-125.2-P-WW-WH-024	<input type="checkbox"/>
	White	NW / 4100K	PIP-125.2-P-NW-WH-024	<input type="checkbox"/>
	Brass	WW / 2700K	PIP-125.2-P-WW-BR-024	<input type="checkbox"/>
	Brass	NW / 4100K	PIP-125.2-P-NW-BR-024	<input type="checkbox"/>
	Black / Copper	WW / 2700K	PIP-125.2-P-WW-BC-024	<input type="checkbox"/>
	Black / Copper	NW / 4100K	PIP-125.2-P-NW-BC-024	<input type="checkbox"/>




WWW.
INFO@
+ 1 60

illuminations
425 Peachtree Hills Ave NE #3, Atlanta, GA 30305
404.876.1064
sales@illumco.com

PIPELINE LINEAR 125.3

CAINE HEINTZMAN / 2013

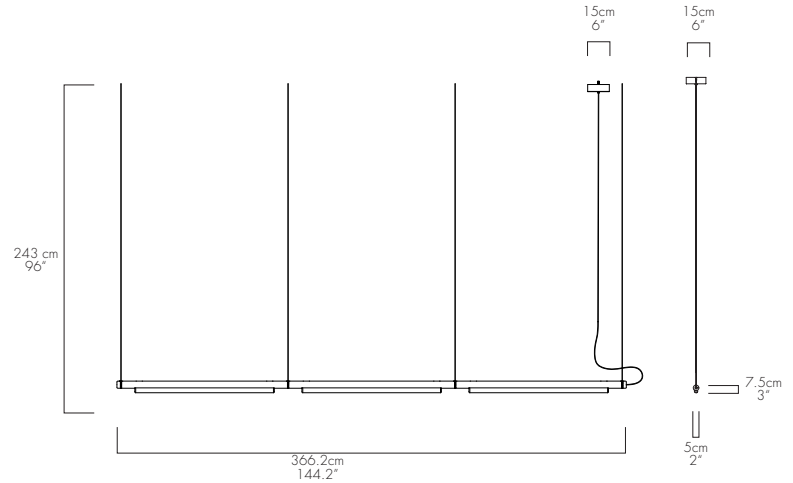

DESCRIPTION

The Pipeline 125.3 linear LED pendant demonstrates three consecutively joined Pipeline125 Sections.

The Pipeline Linear series enables limitless length installations by joining Pipeline Sections (125 or 40) using a standardized connecting collar. For special inquiries please contact info@andlight.ca.

MOUNTING TYPE

Pendant

MATERIALS

Aluminum body
Acrylic diffuser
Linear LED
Aircraft cable

MANUFACTURED

Canada

DIMENSIONS

366.2 x 7.5 x 5cm / 144.2" x 3" x 2"

FACTORY DROP LENGTH

243cm / 96"

*custom length available upon request.

FINISHES



ELECTRICAL

63W Linear Led
70 000 hrs lifetime
2700K / 4100K
91 CRI
120V input 60Hz (*220V & 277V available upon request).
24V DC
Low Voltage Magnetic Driver
Integral 24V power supply included (located in canopy).
*0-10 Electronic Dimming available upon request
*Other colour temperatures available upon request

CERTIFICATIONS



PIPELINE 125.3	FINISH	TEMP.	CODE	
	Black	WW / 2700K	PIP-125.3-P-WW-BK-024	<input type="checkbox"/>
	Black	NW / 4100K	PIP-125.3-P-NW-BK-024	<input type="checkbox"/>
	Copper	WW / 2700K	PIP-125.3-P-WW-CP-024	<input type="checkbox"/>
	Copper	NW / 4100K	PIP-125.3-P-NW-CP-024	<input type="checkbox"/>
	Polish / Copper	WW / 2700K	PIP-125.3-P-WW-PC-024	<input type="checkbox"/>
	Polish / Copper	NW / 4100K	PIP-125.3-P-NW-PC-024	<input type="checkbox"/>
	White	WW / 2700K	PIP-125.3-P-WW-WH-024	<input type="checkbox"/>
	White	NW / 4100K	PIP-125.3-P-NW-WH-024	<input type="checkbox"/>
	Brass	WW / 2700K	PIP-125.3-P-WW-BR-024	<input type="checkbox"/>
	Brass	NW / 4100K	PIP-125.3-P-NW-BR-024	<input type="checkbox"/>
	Black / Copper	WW / 2700K	PIP-125.3-P-WW-BC-024	<input type="checkbox"/>
	Black / Copper	NW / 4100K	PIP-125.3-P-NW-BC-024	<input type="checkbox"/>




WWW.
INFO@
+ 1 60

illuminations
425 Peachtree Hills Ave NE #3, Atlanta, GA 30305
404.876.1064
sales@illumco.com

PIPELINE LINEAR 125.4

CAINE HEINTZMAN / 2013

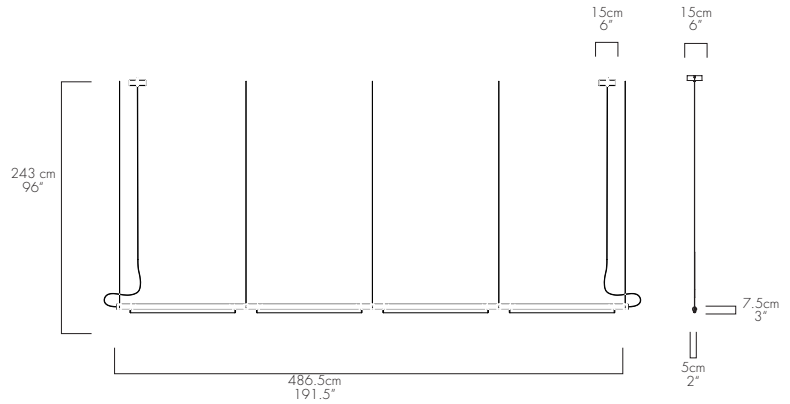

DESCRIPTION

The Pipeline 125.4 linear LED pendant demonstrates four consecutively joined Pipeline 125 Sections.

The Pipeline Linear series enables limitless length installations by joining Pipeline Sections (125 or 40) using a standardized connecting collar. For special inquiries please contact info@andlight.ca.

MOUNTING TYPE

Pendant

MATERIALS

Aluminum body
Acrylic diffuser
Linear LED
Aircraft cable

MANUFACTURED

Canada

DIMENSIONS

486.5 x 7.5 x 5cm / 191.5" x 3" x 2"

FACTORY DROP LENGTH

243cm / 96"

*custom length available upon request.

FINISHES

Black



'BK'

White



'WH'

Copper



'CP'

Brass



'BR'

Polish / Copper



'PC'

Black / Copper



'BC'

ELECTRICAL

84W Linear Led

70 000 hrs lifetime

2700K / 4100K

91 CRI

120V input 60Hz (*220V & 277V available upon request).

24V DC

Low Voltage Magnetic Driver

Integral 24V power supply included (located in canopy).

*0-10 Electronic Dimming available upon request

*Other colour temperatures available upon request

CERTIFICATIONS



PIPELINE 125.4	FINISH	TEMP.	CODE	
	Black	WW / 2700K	PIP-125.4-P-WW-BK-024	<input type="checkbox"/>
	Black	NW / 4100K	PIP-125.4-P-NW-BK-024	<input type="checkbox"/>
	Copper	WW / 2700K	PIP-125.4-P-WW-CP-024	<input type="checkbox"/>
	Copper	NW / 4100K	PIP-125.4-P-NW-CP-024	<input type="checkbox"/>
	Polish / Copper	WW / 2700K	PIP-125.4-P-WW-PC-024	<input type="checkbox"/>
	Polish / Copper	NW / 4100K	PIP-125.4-P-NW-PC-024	<input type="checkbox"/>
	White	WW / 2700K	PIP-125.4-P-WW-WH-024	<input type="checkbox"/>
	White	NW / 4100K	PIP-125.4-P-NW-WH-024	<input type="checkbox"/>
	Brass	WW / 2700K	PIP-125.4-P-WW-BR-024	<input type="checkbox"/>
	Brass	NW / 4100K	PIP-125.4-P-NW-BR-024	<input type="checkbox"/>
	Black / Copper	WW / 2700K	PIP-125.4-P-WW-BC-024	<input type="checkbox"/>
	Black / Copper	NW / 4100K	PIP-125.4-P-NW-BC-024	<input type="checkbox"/>




WWW.ANDLIGHT.CA
INFO@ANDLIGHT.CA
+ 1 604 563 6938

505B RAILWAY STREET
VANCOUVER, BC
CANADA V6A 1A7

illuminations
425 Peachtree Hills Ave NE #3, Atlanta, GA 30305
404.876.1064 sales@illumco.com

PIPELINE LINEAR 125.5

CAINE HEINTZMAN / 2013

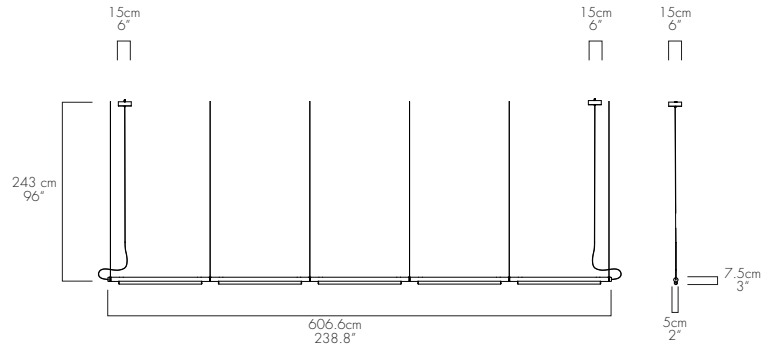

DESCRIPTION

The Pipeline 125.5 linear LED pendant demonstrates five consecutively joined Pipeline 125 Sections.

The Pipeline Linear series enables limitless length installations by joining Pipeline Sections (125 or 40) using a standardized connecting collar. For special inquiries please contact info@andlight.ca.

MOUNTING TYPE

Pendant

MATERIALS

Aluminum body
Acrylic diffuser
Linear LED
Aircraft cable

MANUFACTURED

Canada

DIMENSIONS

606.6 x 7.5 x 5cm / 238.8" x 3" x 2"

FACTORY DROP LENGTH

243cm / 96"

*custom length available upon request.

FINISHES



ELECTRICAL

105W Linear Led
70 000 hrs lifetime
2700K / 4100K
91 CRI
120V input 60Hz (*220V & 277V available upon request).

24V DC

Low Voltage Magnetic Driver
Integral 24V power supply included (located in canopy).

*0-10 Electronic Dimming available upon request

*Other colour temperatures available upon request

CERTIFICATIONS



PIPELINE 125.5	FINISH	TEMP.	CODE	
	Black	WW / 2700K	PIP-125.5-P-WW-BK-024	<input type="checkbox"/>
	Black	NW / 4100K	PIP-125.5-P-NW-BK-024	<input type="checkbox"/>
	Copper	WW / 2700K	PIP-125.5-P-WW-CP-024	<input type="checkbox"/>
	Copper	NW / 4100K	PIP-125.5-P-NW-CP-024	<input type="checkbox"/>
	Polish / Copper	WW / 2700K	PIP-125.5-P-WW-PC-024	<input type="checkbox"/>
	Polish / Copper	NW / 4100K	PIP-125.5-P-NW-PC-024	<input type="checkbox"/>
	White	WW / 2700K	PIP-125.5-P-WW-WH-024	<input type="checkbox"/>
	White	NW / 4100K	PIP-125.5-P-NW-WH-024	<input type="checkbox"/>
	Brass	WW / 2700K	PIP-125.5-P-WW-BR-024	<input type="checkbox"/>
	Brass	NW / 4100K	PIP-125.5-P-NW-BR-024	<input type="checkbox"/>
	Black / Copper	WW / 2700K	PIP-125.5-P-WW-BC-024	<input type="checkbox"/>
	Black / Copper	NW / 4100K	PIP-125.5-P-NW-BC-024	<input type="checkbox"/>



WWW.
INFO@
+ 1 60

illuminations
425 Peachtree Hills Ave NE #3, Atlanta, GA 30305
404.876.1064
sales@illumco.com