



Type:

GRAFA SYSTEM

Design Wilmotte & Industries



family	GR = Grafa System	
type	R = Rectangle (1200x300mm) S = Square (600x600mm)	
CRI	8 = 85CRI TYP	
ССТ	30 = 3000K 35 = 3500K	
body color	A = Clear Anodized	

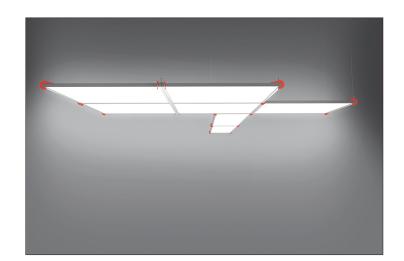


11/16in (1.8cm)



SPECIFICATIONS:

Power input : 36W Luminous flux: 3456lm (estimated) Efficacy: 96lm/W (estimated)



FEATURES:

Module with direct and indirect emission for suspension, with high LED efficiency.


Construction : structure in extruded aluminum, anodized clear matte, top screen with anti-dust polycarbonate. Suspension cables in steel with quick adjustment.

Notes : Must be paired with driver housing (available in recessed or surface model, sold separately) along with suspension brackets (available in choice of 6 colors, sold separately); accessories on next page. For all other finishes, please contact your local Artemide sales representative.

Weight: 9lbs (4Kg), both versions

Label: . 🕀 - suitable for dry locations Class: IP20 😩 🕅

PHOTOMETRIC DATA:








Type:

GRAFA SYSTEM

Design Wilmotte & Industries

MOUNTING ACCESSORIES: One or more types must be selected

Clip for single module :



Linking Clip for 3 modules :

Linking Clip for 4 modules :

Linking Clip for connecting Rectangle with Square model



Code	Color
M301000	GREY
M301010	ANTHRACITE
M301020	WHITE
M301030	BLUE
M301040	RED
M301050	GREEN

Quantity

Code	Color
M301100	GREY
M301110	ANTHRACITE
M301120	WHITE
M301130	BLUE
M301140	RED
M301150	GREEN

Code	Color
M301200	GREY
M301210	ANTHRACITE
M301220	WHITE
M301230	BLUE
M301240	RED
M301250	GREEN

Quantity

Code	Color
M301300	GREY
M301310	ANTHRACITE
M301320	WHITE
M301330	BLUE
M301340	RED
M301350	GREEN

Quantity

Code	Color
M301400	GREY
M301410	ANTHRACITE
M301420	WHITE
M301430	BLUE
M301440	RED
M301450	GREEN







Project:


Notes:

GRAFA SYSTEM

Design Wilmotte & Industries

DRIVER KITS: Must be selected


Driver housing Recessed mount :



Code	Туре	Configuration	Q
USC-MGRHR6108W	On/Off + 0-10V dim UNV	Single (powers one module)	
USC-MGRHR6208W	On/Off + 0-10V dim UNV	Dual (powers two modules)	




Type:



ceiling thickness min 1/4in (6mm) max 5/8in (16mm)

Driver housing Surface mount :



Code	Туре	Configuration
USC-MGRHS6108W	On/Off + 0-10V dim UNV	Single (powers one module)
USC-MGRHS6208W	On/Off + 0-10V dim UNV	Dual (powers two modules)





12 1/4in (31cm)





GRAFA SYSTEM

Design Wilmotte & Industries

DRIVER HOUSING TO MODULE LINKING:

Driver Housing Linking examples (applies to both Rectangle and Square Modules)

Project:

Notes:

1 Module = 1 Driver Housing with Single driver configuration (S)

2 Modules = 1 Driver Housing with Dual driver configuration (D)


3 Modules = 2 Driver Housings, 1 with Single (S) and 1 with Dual (D) driver configuration. (S) fed module must not be connected electrically with (D).

3 Modules (alternate configuration) = 2 Driver Housings, 1 with Dual driver configuration (D) and 1 with Single driver configuration (S)


4 Modules = 2 Driver Housings with Dual driver configuration (D) (D1) fed module must not be connected electrically with (D2).

We reserve the right to change specifications of our products (designs, materials and finishes). For the latest product information, please contact: USA: 631-694-9292, Canada: 514-323-6537 or at www.a 2016 © Artemide | All rights reserved Type:


s s




(S) or (D) icons show possible feed placement



connected electrically





must not be connected electrically






Type:


GRAFA SYSTEM

Design Wilmotte & Industries

EXAMPLE OF A COMPLEX CONFIGURATION:

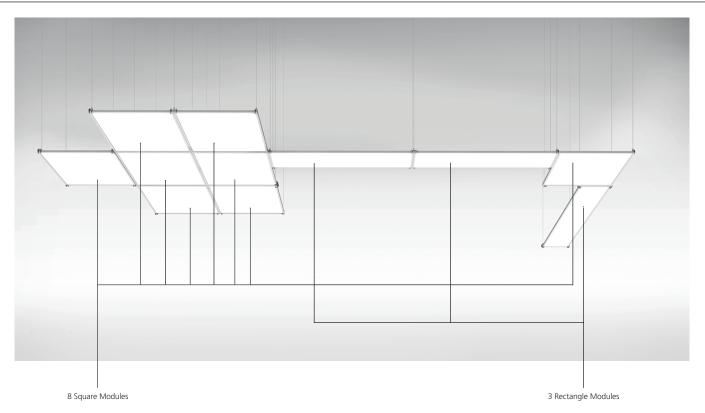

Housings



dual driver housing

> 425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305 404.876.1064 sales@illumco.com

dual driver

housing




Type:

GRAFA SYSTEM

Design Wilmotte & Industries

EXAMPLE OF A COMPLEX CONFIGURATION:

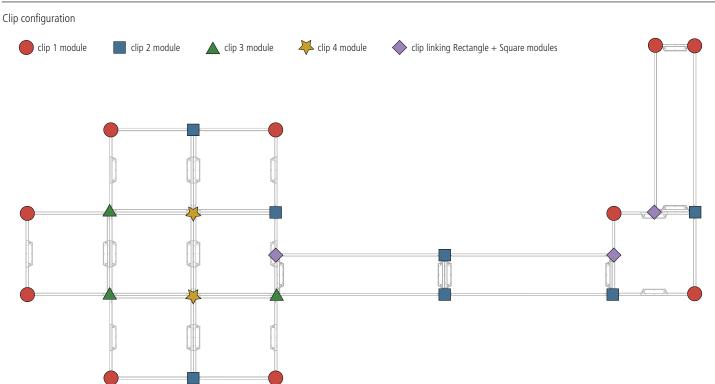

Suspension cable positioning

