

Project:	Type:
Notes:	



## GRAFA STANDALONE

Design Wilmotte & Industries

#CAT	family	shape	housing	cord length	CRI	CCT	driver	body color	bracket color
USC-M	GRK	___	___	6	8	___	08	A	___

Quantity

family	<b>GRK</b> = Grafa Standalone
shape	<b>R</b> = Rectangle (1200x300mm) <b>S</b> = Square (600x600mm)
housing	<b>R</b> = Recessed <b>S</b> = Surface
cord length	<b>6</b> = 6 feet
CRI	<b>8</b> = 85CRI TYP
CCT	<b>30</b> = 3000K <b>35</b> = 3500K
driver	<b>08</b> = On/Off + 0-10V UNV
body color	<b>A</b> = Clear Anodized
bracket color	<b>0</b> = Grey <b>1</b> = Anthracite <b>2</b> = White <b>3</b> = Blue <b>4</b> = Red <b>5</b> = Green

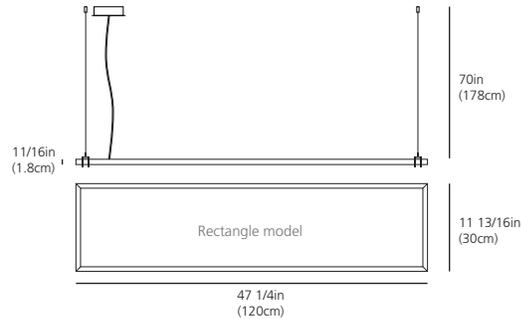

### SPECIFICATIONS:

Power input : 48W  
Luminous flux : 4123lm (estimated)  
Efficacy: 86lm/W (estimated)

### FEATURES:

Standalone module with direct and indirect emission, with high LED efficiency. Installation with suspension.

**Construction** : structure in extruded aluminum, anodized clear matte, top screen with anti-dust polycarbonate and staple brackets in 6 different powder coat colors. Suspension cables in steel with quick adjustment.

**Notes** : For all other finishes, please contact your local Artemide sales representative.

**Weight** : 9lbs (4Kg), both versions

**Label**: - suitable for dry locations

**Class**: IP20

### PHOTOMETRIC DATA:

