



Code:	Project:	Type:
	Notes:	

# KAO KIT D LED SUSPENSION

Design Bruno Houssin

#CAT	model	config.	finish	certification	out put	voltage	CCT	driver	Quantity
<b>USC-M</b>	<b>119</b>	<b>4</b>	___	<b>8</b>	<b>H</b>	<b>00</b>	___	___	___

model	<b>119</b> = KAO Suspension
configuration	<b>4</b> = D
finish	<b>1</b> = Black <b>2</b> = White
certification	<b>8</b> = UL
output	<b>H</b> = High output (2 x 40W LED)
voltage	<b>00</b> = UNV (120-277V)
CCT	<b>LA</b> = 3000K <b>LB</b> = 3500K
driver	<b>TV</b> = Dim 0-10V (on/off included)

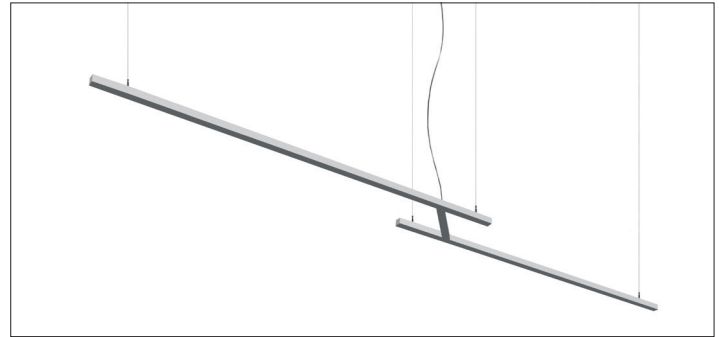

## LAMPING:


Power input : 2 x 40W (80W total)

Lumen output : 3366lm

Efficacy : 42lm/W\*

LM79 : Not available yet

\*Informations calculated for 3500K

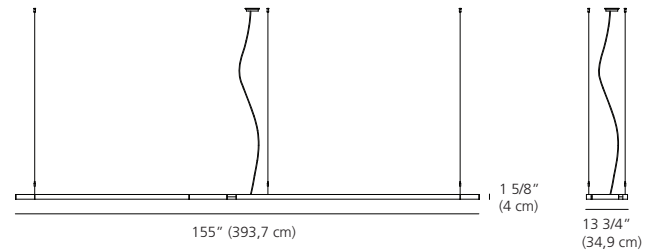

## FEATURES:

**Construction:** Extruded aluminum body. 1 9/16" x 1 9/16" (40 x 40 mm) square section modules.

**Diffuser:** Dust protection cover in polycarbonate.

**Notes:** Electrical connections via quick connectors. Each structure is composed of pre-assembled and pre-wired sub units, supplied with a drilling template for placing the ceiling fixing points. Supplied with 20' of quick - adjustment steel cable.

**Weight:** Not available yet

**Certification:** eULus - suitable for dry locations

**Classification:** IP20

## PHOTOMETRIC DATA:

Photometric curve (cd):  
LED 1 x 40W

