

Light sources	<p> FLE model: G5 2 x 28W fluo, 120/277V, Mini bi-pin T5, Fulham ballast HE dimmable 0-10V</p> <p> FHO model: G5 2 x 54W fluo, 120/277V, Mini bi-pin T5, Fulham ballast HO dimmable 0-10V</p> <p>LED model: 67.2W included, 120/277V, 3000°K, CRI>80, 8824 lm delivered, 131.3 lm/W, dimmable 0-10V *</p> <p>LAMPS ARE NOT INCLUDED EXCEPT FOR LED MODEL</p>
Installation	Mounts to standard electrical box
Structure	White painted aluminium
Diffuser	Transparent splined polycarbonate Light transmission 88%
Cover plate options	One white metal 4 3/4" x 4 3/4" x 1/4" cover plate (included) OR UMUDKIT00001 optional mud kit (not included)

UP FW P 090, UP FW P 180, & UP FW P 270 Design by Manuel Vivian


Collection of pendants, ceiling / wall lights in matte white painted aluminium. Available in three different sized frames. Ceiling / wall version also has three different leg sizes, making a variety of customizable compositions possible.

Typology: CEILING / WALL LIGHT

Certifications: **TITLE 24 COMPLIANT
DRY LOCATION ONLY**

Standard Shipment: 6-8 weeks

Fast Shipment: 2-4 weeks

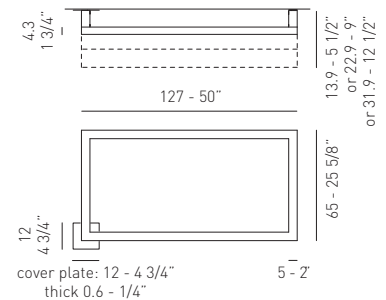

*AVAILABLE HEIGHTS:

With cover plate:		
UP FW P 090:	5.24"	13.45 lbs 7.06 ft ³
UP FW P 180:	8.80"	13.67 lbs 7.06 ft ³
UP FW P 270:	12.32"	13.89 lbs 7.06 ft ³

With mud kit:		
UP FW P 090:	5.25"	13.45 lbs 7.06 ft ³
UP FW P 180:	8.75"	13.67 lbs 7.06 ft ³
UP FW P 270:	12.38"	13.89 lbs 7.06 ft ³

Product code composition

	LAMPSHADE COLOURS	RADIAL DIFFUSER COLOURS	LIGHT SOURCES
UPFWP090 FLE UPFWP090 FHO UPFWP090 LED	BC	XX	G5 2 x 28W fluo G5 2 x 54W fluo 4 x 16.8W LED
UPFWP180 FLE UPFWP180 FHO UPFWP180 LED			G5 2 x 28W fluo G5 2 x 54W fluo 4 x 16.8W LED
UPFWP270 FLE UPFWP270 FHO UPFWP270 LED			G5 2 x 28W fluo G5 2 x 54W fluo 4 x 16.8W LED

code structure: MODEL LIGHT EXTERIOR INTERIOR

LAMPSHADE COLOUR CODE: BC (bianco) white, blanc, blanco

RADIAL DIFFUSER COLOUR CODE: XX standard colour, no options



UPFWP _____ BCXX

NAME: _____

NOTES: _____



Visit www.axolight

425 Peachtree Hills Ave NE #3, Atlanta, GA 30305
404.876.1064 sales@illumco.com

*For optional drivers and dimming technology please refer to our website or contact our representatives.

Please Note: Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this technical data sheet. Confirm with Axo Light before ordering, reference: 1-2015 technical sheet.