



**US LIAD G 4**

Design by Sara Moroni


Collection consisting of metal suspended lamps.  
Available in several colors and sizes.  
Built-in dimmable LED light source.

Typology: suspended

**Ratings**

- Built in **LED** module
- CCT 3000 K
- optic ~40° beam
- Surface installation over holes
- Supply voltage ~100-240V
- Switch mode: on-off
- Dimmable 0/1-10V

lb 18.86 ft<sup>3</sup> 6.334

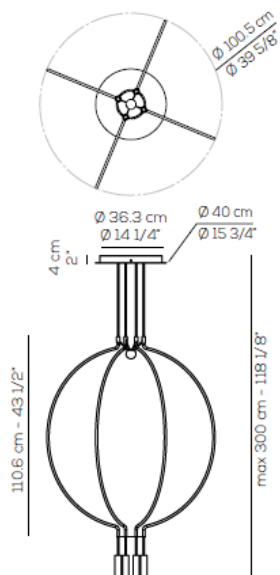

Product code composition  
**LIAISON / DRIVER INCLUDED**

Type	Article	Arch / Final & sphere finishes	Source
US	LIAI G 4	NE black / NE black	LED 4 x 7.5W - optic ~ 40° beam 3000K*, 2700K
		NE black / OO matt gold	
		OO matt gold / NE black	



DRY LOCATION CRI>90 **LED** ~2684 lm\* 89 lm/W\* 100-240VAC

example composition code US LIAI G 4 OO NE LED

Available colors



NE/NE  
Black/black

OO/NE  
Matt gold  
/black

NE/OO  
Black/ Matt  
gold

Customizable

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

USLIADG4\_ \_ \_ \_ LED

\_\_\_\_\_

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all built in LED luminaires is based on nominal ratings of the LED sources.  
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.



**US LIAD M 4**

Design by Sara Moroni


Collection consisting of metal suspended lamps.  
Available in several colors and sizes.  
Built-in dimmable LED light source.

Typology: suspended

**Ratings**

- Built in **LED** module
- CCT 3000 K
- optic ~40° beam
- Surface installation over holes
- Supply voltage ~100-240V
- Switch mode: on-off
- Dimmable 0/1-10V

lb 18.16 ft<sup>3</sup> 8.745

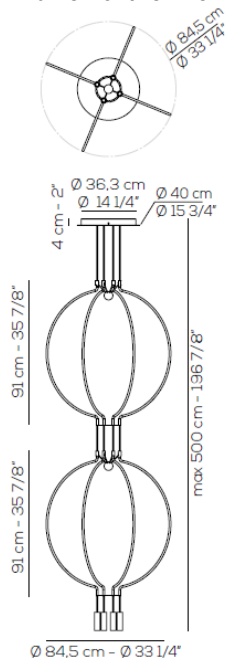

Product code composition  
**LIAISON / DRIVER INCLUDED**

Type	Article	Arch / Final & sphere finishes	Source
US	LIAD M 4	NE black / NE black	LED 4 x 7.5W - optic ~ 40° beam 3000K*, 2700K
		NE black / OO matt gold	
		OO matt gold / NE black	



DRY LOCATION CRI>90 **LED** ~2684 lm\* 89 lm/W\* 100-240VAC

example composition code US LIAD M 4 OO NE LED

Available colors



NE/NE  
Black/black

OO/NE  
Matt gold  
/black

NE/OO  
Black/ Matt  
gold

Customizable

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

USLIADM4\_ \_ \_ \_ LED

\_\_\_\_\_

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all built in LED luminaires is based on nominal ratings of the LED sources.  
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.



**US LIAD P 4**

Design by Sara Moroni


Collection consisting of metal suspended lamps.  
Available in several colors and sizes.  
Built-in dimmable LED light source.

Typology: suspended

**Ratings**

- Built in **LED** module
- CCT 3000 K
- optic ~40° beam
- Surface installation over holes
- Supply voltage ~100-240V
- Switch mode: on-off
- Dimmable 0/1-10V

Ib 16.21 ft<sup>3</sup> 3.347

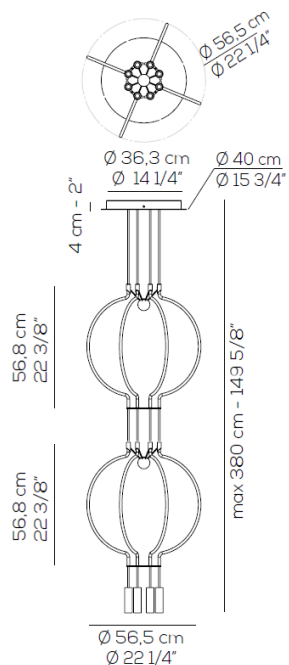

Product code composition

**LIAISON / DRIVER INCLUDED**

Type	Article	Arch / Final & sphere finishes	Source
US	LIAD P 4	NE black / NE black	LED 4 x 7.5W - optic ~ 40° beam 3000K*, 2700K
		NE black / OO matt gold	
		OO matt gold / NE black	



DRY LOCATION CRI>90 **LED** ~2684 lm\* 89 lm/W\* 100-240VAC

example composition code US LIAD P 4 NE NE LED

Available colors



NE/NE  
Black/black

OO/NE  
Matt gold  
/black

NE/OO  
Black/ Matt  
gold

Customizable

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

USLIADP4\_ \_ \_ \_ LED

CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

\_\_\_\_\_

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all built in LED luminaires is based on nominal ratings of the LED sources.  
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.