



USMEL120

Design by Sandro Santantonio

Collection consisting of wall lamps, suspended lamps and floor lamps. The lampshades coming in various decorative patterns. Opalescent diffusers available on request.

Typology: SUSPENDED


Ratings

- GU24 LED
- CCT 2700 K, CRI 80
- Downlight and uplight
- Installs over 4 in. octagonal J-box
- Power supply 120V AC
- Switch mode: on-off
- Dimmable ELV trailing edge phase cut LED bulbs
- Steel frame
- Optional opalescent diffusers

Product code composition

MELTINGPOT / diffuser NOT INCLUDED

Type	Article	Colours	Finish	Source
US	MEL 120	BC light patterns outside / white inside	XX white varnished metal	LED GU24 3x15W - included 120VAc - diffused beam - 2700K
		BA light patterns outside / silver inside		
		BO light patterns outside / gold inside		
		NA dark patterns outside / silver inside		
		NE dark patterns outside / gold inside		

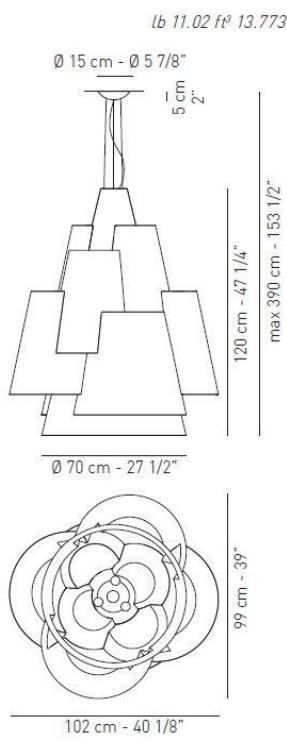


DRY LOCATION
LED
CRI80
dim. ELV TRAILING EDGE PHASE CUT
4800 lm 107 lm/W

example composition code | **US** | **MEL120** | **BC** | **XX** | **LED**

For optional accessories please refer to our pricelist, website or contact our representatives

Available colors

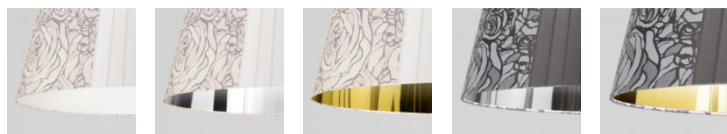

- BC** Light patterns outside / white inside
- BA** Light patterns outside / silver inside
- BO** Light patterns outside / gold inside
- NA** Dark patterns outside / silver inside
- NE** Dark patterns outside / gold inside

SPMEL120_XXE26

CUSTOMER _____ NOTES _____

Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is estimated based on nominal ratings of the LED. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy.





USMELT60
Design by Sandro Santantonio

Collection consisting of wall lamps, suspended lamps and floor lamps. The lampshades coming in various decorative patterns. Opalescent diffusers available on request.


Typology: SUSPENDED

Ratings

- GU24 LED
- CCT 2700 K, CRI 80
- Downlight and uplight
- Installs over 4 in. octagonal J-box
- Power supply 120V AC
- Switch mode: on-off
- Dimmable ELV trailing edge phase cut LED bulbs
- Steel frame
- Optional opalescent diffusers

Product code composition

lb 5.51 ft³ 4.944

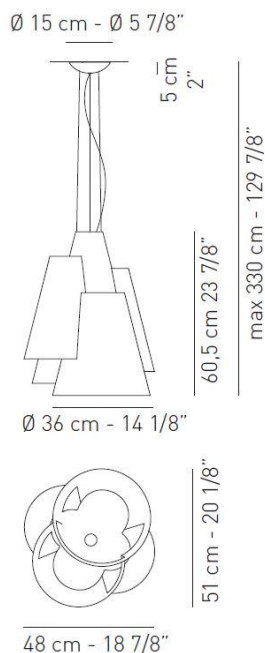

MELTINGPOT / diffuser NOT INCLUDED


Type	Article	Colours	Finish	Source
US	MELT 60	BC light patterns outside / white inside	XX white varnished metal	LED GU24 1x15W - included 120Vac - diffused beam - 2700K
		BA light patterns outside / silver inside		
		BO light patterns outside / gold inside		
		NA dark patterns outside / silver inside		
		NE dark patterns outside / gold inside		

DRY LOCATION
LED
CRI80
dimmable ELV TRAILING EDGE PHASE CUT
1600 lm
107 lm/W

example composition code | **US** | **MELT60** | **BA** | **XX** | **LED**

For optional accessories please refer to our pricelist, website or contact our representatives

Available colours

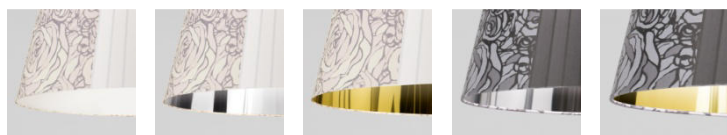

- BC** Light patterns outside / white inside
- BA** Light patterns outside / silver inside
- BO** Light patterns outside / gold inside
- NA** Dark patterns outside / silver inside
- NE** Dark patterns outside / gold inside

USMELT60_XXE26

CUSTOMER _____ NOTES _____

Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is estimated based on nominal ratings of the LED. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy.

