



UPMUSE40 LED

Design by Sandro Santantonio

Collection consisting of ceiling or wall lamps, suspended lamps and table lamps with metal frame and removable, washable elastic fabric covering. Available in several colours and sizes.

Typology: WALL, CEILING LAMP


Ratings

- GU24 LED
- CCT 2700 K, CRI 80
- Diffused light
- Surface installation over holes
- Power supply 120V AC
- Switch mode: on-off
- Dimmable ELV trailing edge phase cut LED bulbs
- Steel frame, painted

Product code composition

UP	MUSE 40	BC white	XX white metal	LED GU24 1x9W - included 120Vac diffused beam - 2700K
		AR orange		
		AZ light blue		
		BL dark blue		
		FU fuchsia		
		GI yellow		
		RO pink		
		RS red		
		VE green		
		VI violet		
		MC multicolour		
		FI flower		
		ST sticks		

lb 2.2 ft³ 1.059



Ø 40 cm - Ø 15 3/4"

Silk stretch fabric

Comp. 84% polyester, 16% elastane (Spandex) for multicolour MC.
Comp. 80% polyamide, 20% elastane (Spandex) for other colours.

Weight 170/190 gr/m² for multicolour MC.
Weight 195/215 gr/m² for white BC.
Weight 180/200 gr/m² for other colours.

Light fastness (ISO 105 B02) from 3 to 6
Glow wire 750°C for multicolour MC
Glow wire 850°C for white BC / other colours.

DRY LOCATION
LED
CRI80

 dimmable ELV TRAILING EDGE PHASE CUT

800 lm
89 lm/W

example composition code | **UP** | **MUSE40** | **MC** | **XX** | **LED**

Available colours



BC White **AR** Orange **AZ** Light blue **BL** Dark blue **FU** Fuchsia **GI** Yellow **RO** Pink **RS** Red **VE** Green **VI** Violet **MC** Multi color **FI** Flower **ST** Sticks

UPMUSE40__XXLED CUSTOMER _____ NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy.





UPMUSE60 LED

Design by Sandro Santantonio

Collection consisting of ceiling or wall lamps, suspended lamps and table lamps with metal frame and removable, washable elastic fabric covering. Available in several colours and sizes. Screw fitting light source.



Typology: WALL, CEILING LAMP LAMP

Ratings

- GU24 LED
- CCT 2700 K, CRI 80
- Diffused light
- Surface installation over holes
- Power supply 120V AC
- Switch mode: on-off
- Dimmable ELV trailing edge phase cut LED bulbs
- Steel frame, painted

Product code composition

lb 3.31 ft³ 3.178



Ø 60 cm - Ø 23 5/8"

UP	MUSE 60	BC white	XX white metal	LED GU24 2x15W - included 120VAC diffused beam - 2700K
		AR orange		
		AZ light blue		
		BL dark blue		
		FU fuchsia		
		GI yellow		
		RO pink		
		RS red		
		VE green		
		VI violet		
		MC multicolour		
		FI flower		
		ST sticks		

Silk stretch fabric

Comp. 84% polyester, 16% elastane (Spandex) for multicolour MC.

Comp. 80% polyamide, 20% elastane (Spandex) for other colours.

Weight 170/190 gr/m² for multicolour MC.

Weight 195/215 gr/m² for white BC.

Weight 180/200 gr/m² for other colours.

Light fastness (ISO 105 B02) from 3 to 6


Glow wire 750°C for multicolour MC

Glow wire 850°C for white BC / other colours.

DRY LOCATION
 LED
 CRI80
 dimmable ELV TRAILING EDGE PHASE CUT
 3200 lm 107 lm/W

example composition code | **UP** | **MUSE60** | **RS** | **XX** | **LED**

Available colours

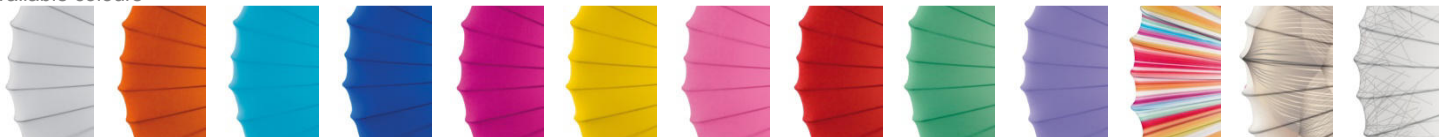

BC White
 AR Orange
 AZ Light blue
 BL Dark blue
 FU Fuchsia
 GI Yellow
 RO Pink
 RS Red
 VE Green
 VI Violet
 MC Multi color
 FI Flower
 ST Sticks

UPMUSE60__XXLED CUSTOMER _____ NOTES _____



UPMUSE80 LED


Design by Sandro Santantonio

Collection consisting of ceiling or wall lamps, suspended lamps and table lamps with metal frame and removable, washable elastic fabric covering. Available in several colours and sizes.

Typology: WALL, CEILING LAMP

Ratings

- GU24 LED
- CCT 2700 K, CRI 80
- Diffused light
- Surface installation over holes
- Power supply 120V AC
- Switch mode: on-off
- Dimmable ELV trailing edge phase cut LED bulbs
- Steel frame, painted

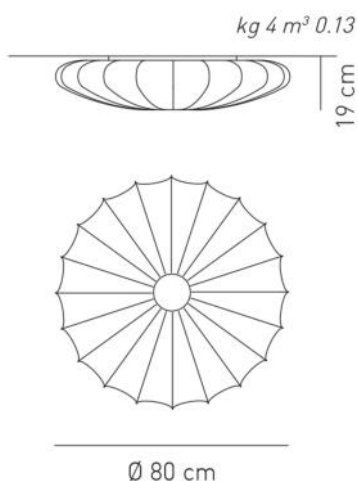

Product code composition

UP	MUSE 80	BC white	XX white metal	LED	GU24 3x15W - included 120Vac diffused beam - 2700K
		AR orange			
		AZ light blue			
		BL dark blue			
		FU fuchsia			
		GI yellow			
		RO pink			
		RS red			
		VE green			
		VI violet			
		MC multicolour			
		FI flower			
		ST sticks			

Silk stretch fabric

Comp. 84% polyester, 16% elastane (Spandex) for multicolour MC.

Comp. 80% polyamide, 20% elastane (Spandex) for other colours.

Weight 170/190 gr/m² for multicolour MC.

Weight 195/215 gr/m² for white BC.

Weight 180/200 gr/m² for other colours.

Light fastness (ISO 105 B02) from 3 to 6

Glow wire 750°C for multicolour MC

Glow wire 850°C for white BC / other colours.

DRY LOCATION


 LED

 CRI80

 dimmable ELV TRAILING EDGE PHASE CUT
 4800 lm 107 lm/W

example composition code | **UP** | **MUSE80** | **VE** | **XX** | **LED**

Available colours

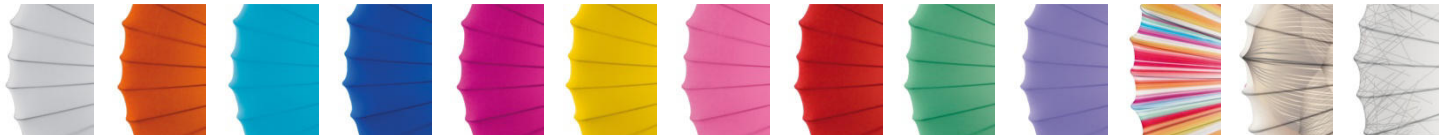

BC White	AR Orange	AZ Light blue	BL Dark blue	FU Fuchsia	GI Yellow	RO Pink	RS Red	VE Green	VI Violet	MC Multi color	FI Flower	ST Sticks
--------------------	---------------------	-------------------------	------------------------	----------------------	---------------------	-------------------	------------------	--------------------	---------------------	--------------------------	---------------------	---------------------

UPMUSE80__XXLED CUSTOMER _____ NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy.





UPMUS120 LED

Design by Sandro Santantonio

Collection consisting of ceiling or wall lamps, suspended lamps and table lamps with metal frame and removable, washable elastic fabric covering. Available in several colours and sizes.


Typology: WALL, CEILING LAMP

Ratings

- GU24 LED
- CCT 2700 K, CRI 80
- Diffused light
- Surface installation over holes
- Power supply 120V AC
- Switch mode: on-off
- Dimmable ELV trailing edge phase cut LED bulbs
- Steel frame, painted

Product code composition

UP	MUS 120	BC white	XX white metal	LED	GU24 3x15W - included 120Vac diffused beam - 2700K
		AR orange			
		AZ light blue			
		BL dark blue			
		FU fuchsia			
		GI yellow			
		RO pink			
		RS red			
		VE green			
		VI violet			
		MC multicolour			
		FI flower			
		ST sticks			

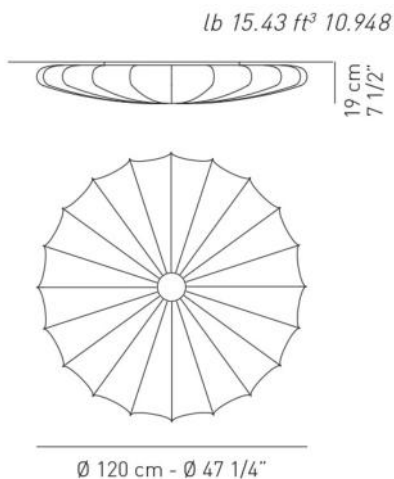

Silk stretch fabric

Comp. 84% polyester, 16% elastane

(Spandex) for multicolour MC.

Comp. 80% polyamide, 20% elastane

(Spandex) for other colours.

Weight 170/190 gr/m² for multicolour MC.

Weight 195/215 gr/m² for white BC.

Weight 180/200 gr/m² for other colours.

Light fastness (ISO 105 B02) from 3 to 6

Glow wire 750°C for multicolour MC


Glow wire 850°C for white BC / other

colours.

DRY LOCATION
LED
CRI80
dimmable ELV TRAILING EDGE PHASE CUT
4800 lm 107 lm/W

example composition code **UP MUS120 FU XX LED**

Available colours

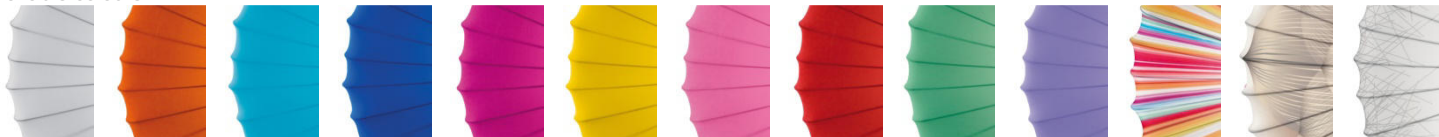

BC White **AR** Orange **AZ** Light blue **BL** Dark blue **FU** Fuchsia **GI** Yellow **RO** Pink **RS** Red **VE** Green **VI** Violet **MC** Multi color **FI** Flower **ST** Sticks

UPMUS120_ _XXLED CUSTOMER _____ NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy.

