



**UTPLU080**

Design by Vanessa Vivian

Collection consisting of suspended lamps and floor lamps with white metal frame and fabric diffusers covered with flame-retardant TREVIRA® CS. Available in several colours and sizes.

Typology: FLOOR LAMP

**Ratings**


- E26 or GU24 LED
- Diffused light
- Floor standing
- Power supply 120V AC
- Switch mode: on-off
- Steel frame, painted

**GU24 LED VERSION**

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut LED bulb


Product code composition

| PLUMAGE |             |                |        |  |  |
|---------|-------------|----------------|--------|--|--|
| Type    | Article     | Colours        | Finish | Source   |  |
| UT      | PLU 080 E26 | BC white       | XX     | E26 3 x Max 26W fluo - requires self-dimming CFL lamps<br>dimmable |  |
|         |             | AR orange      |        |  |  |
|         | PLU 080 LED | FU fuchsia     |        |  | LED GU24 3x15W - included 120Vac - CRI80 diffused beam - 2700K 4800 lm - 107 lm/W<br>dimmable ELV TRAILING EDGE PHASE CUT <b>LED</b> |
|         |             | GR light grey  |        |  |  |
|         |             | MA brown       |        |  |  |
|         |             | RS red         |        |  |  |
|         |             | VE light green |        |  |  |
|         |             | MC multi-color |        |  |  |

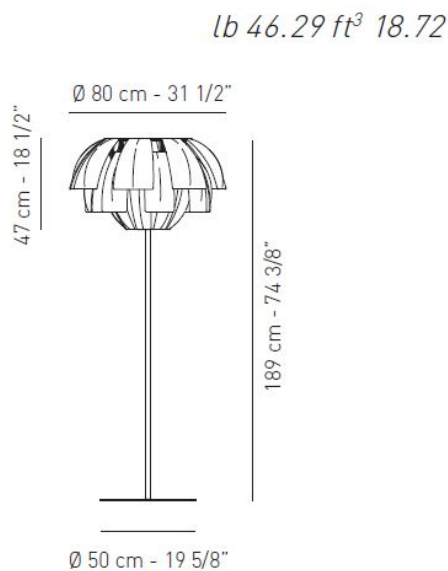

example composition code | UT | PLU080LED | FU | XX

Available colors

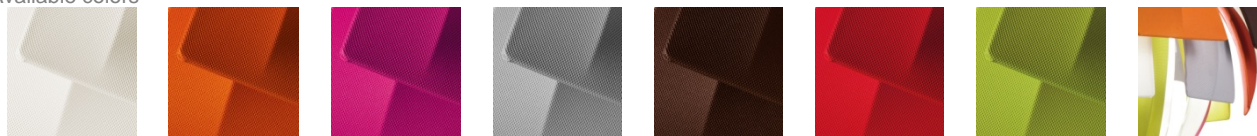

BC White    AR Orange    FU Fuchsia    GR Light grey    MA Brown    RS Red    VE Light green    MC Multicolor

UTPLU080\_ \_ \_ \_ \_ XX      CUSTOMER \_\_\_\_\_      NOTES \_\_\_\_\_

Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305  
404.876.1064      sales@illumco.com



**UTPLU180**  
Design by Vanessa Vivian

Collection consisting of suspended lamps and floor lamps with white metal frame and fabric diffusers covered with flame-retardant TREVIRA® CS. Available in several colours and sizes..

Typology: FLOOR LAMP

**Ratings**


- E26 or GU24 LED
- Diffused light
- Floor standing
- Power supply 120V AC
- Switch mode: on-off
- Steel frame, painted

**GU24 LED VERSION**

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut LED bulb

Product code composition


| PLUMAGE |             |                |  |  |
|---------|-------------|----------------|--|--|
| Type    | Article     | Colours        | Finish   | Source   |
| UT      | PLU 180 E26 | BC white       | XX   | E26 6 x Max 26W fluo - requires self-dimming CFL lamps<br>dimmable |
|         |             | AR orange      |  |  |
|         | PLU 180 LED | FU fuchsia     | LED GU24 6x15W - included 120VAc - CRI80 diffused beam - 2700K 9600 lm - 107 lm/W<br>dimmable ELV TRAILING EDGE PHASE CUT <b>LED</b> |  |
|         |             | GR light grey  |  |  |
|         |             | MA brown       |  |  |
|         |             | RS red         |  |  |
|         |             | VE light green |  |  |
|         |             | MC multi-color |  |  |

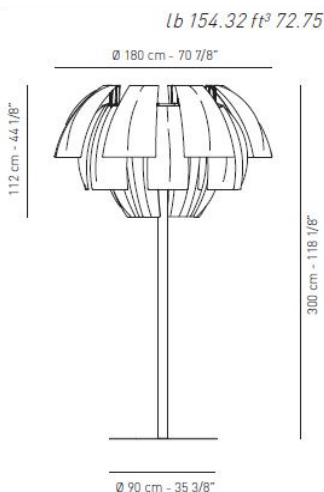

DRY LOCATION

example composition code |UT |PLU180E26 |RS |XX

Available colors

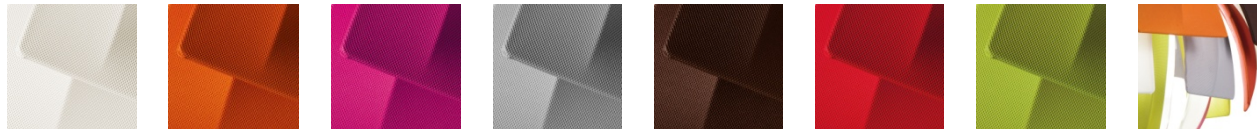

BC White    AR Orange    FU Fuchsia    GR Light grey    MA Brown    RS Red    VE Light green    MC Multicolor

UTPLU180\_ \_ \_ \_ \_XX      CUSTOMER \_\_\_\_\_      NOTES \_\_\_\_\_

225 Peachtree Hills Ave. NE #3 Atlanta, GA 30305  
404.876.1064      sales@illumco.com

Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is estimated based on nominal ratings of Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the