

Light sources	FLE model: G5 2 x 14W fluo, 120/277V, Mini bi-pin T5, [*] Fulham ballast HE dimmable 0-10V FHO model: G5 2 x 24W fluo, 120/277V, Mini bi-pin T5, [*] Fulham ballast HO dimmable 0-10V <p style="text-align: center;">LAMPS ARE NOT INCLUDED</p>
Installation	Mounts to standard electrical box
Structure	White painted aluminium
Diffuser	Methacrylate

UA SHATTE

Design by S. & R. Cornelissen


Collection of pendants, ceiling and wall lights in matte white painted aluminium. Ceiling and pendants are available in three different sizes, making a variety of customizable compositions possible.

Typology: WALL LIGHT

Certifications: **TITLE 24 COMPLIANT DRY LOCATION ONLY**

Standard Shipment: 8-16 weeks

Fast Shipment: 7-10 weeks

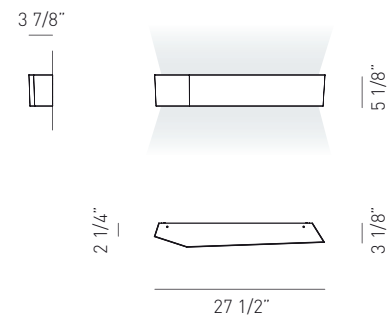

8.37 lbs
2.83 ft³

Product code composition

	LAMPSHADE COLOURS	RADIAL DIFFUSER COLOURS	LIGHT SOURCES
UASHATTE FLE UASHATTE FHO	BC	XX	G5 2 x 14W fluo G5 2 x 24W fluo

code structure: MODEL LIGHT EXTERIOR INTERIOR

LAMPSHADE COLOUR CODE: BC (bianco) white, blanc, blanco

RADIAL DIFFUSER COLOUR CODE: XX standard colour, no options

^{*} Most fixtures may also be relabeled to a lower maximum wattage to accommodate energy efficiency and TITLE 24 requirements.

Please Note: Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this technical data sheet. Confirm with Axo Light before ordering, reference: 1-2015 technical sheet.



UASHATTE ___ BCXX

NAME: _____

NOTES: _____

Visit www.axolight 425 Peachtree Hills Ave NE #3, Atlanta, GA 30305
404.876.1064 sales@illumco.com