



USSK1002
Design by Manuel Vivian


Collection of suspended lamps in flame-retardant TREVIRA®CS fabric (100% polyester Glow wire 960 °C), available in several sizes and colors. The fabric can also come in a double-layer version with an exterior black net fabric. A decorative inner lampshade (also printable with customized graphic) is available.
Typology: SUSPENDED

- Ratings**
- E26 or GX24q-4 or GU24 LED bulbs included or Built in **LED** module
 - Downlight and uplight
 - Installs over 4 in. octagonal J-box (support independently)
 - Power supply 120V AC
 - Switch mode: on-off
 - Steel frame

- L10 BUILT IN LED VERSION**
- CCT 3000 K, CRI 90
 - Power supply 120/277V AC
 - Dimmable ELV 0-10V
- GU24 LED VERSION**
- CCT 2700 K, CRI 80
 - Dimmable ELV trailing edge, phase cut LED bulbs

FLE VERSION •Power supply 120/277V AC

Product code composition

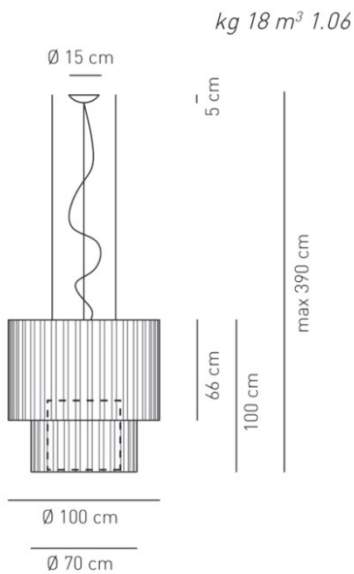

kg 18 m³ 1.06

SKIRT / diffuser INCLUDED, with upward and downward lighting

Type	Article	Exterior Net	Fabric Colours	Source
US	SK 100 2 E26	NE black net	BC white	E26 4 x Max 17W LED or 4 x Max 26W fluo
	SK 100 2 FLE	XX no black net	AR orange	FLE GX24q-4 3x42W + 1x42W 120/277VAc
	SK 100 2 LED		AZ light blue BL blue	LED GU24 4x15W - included 120VAc - CRI 80 diffused beam - 2700K 6400 lm - 107 lm/W - dimmable ELV TRAILING EDGE PHASE CUT LED
	SK 100 2 L10		FU fuchsia GR light grey MA brown RS red VE light green	L10 95W LED - integrated 120/277VAc - CRI90 diffused beam - 3000K 10700 lm - 113 lm/W - dimmable ELV 0-10V LED

SINGLE FABRIC
Fireproof class I= C1, GB= CRIB 5, D=B1, F= M1, EN= 102/1-2, A 652 / Weight 340 ± 5% gr/m² / Abrasion resistance (Martindale): 40.000 ± 10% rubs / Pilling Grade 5 / Light fastness grade 6


BLACK NET FINISH FABRIC
Fireproof class I= C1, F= M1, D= B1 DIN 4102 / Weight 214 ± 5% gr/m² / Abrasion resistance (Martindale): 30.000 ± 10% rubs / Pilling Grade 5 / Light fastness grade 5



example composition code |UP| SK1002LED |NE| RS |

For optional accessories please refer to our pricelist, website or contact our representatives


Available colors



BC White AR Orange AZ Light blue BL Blue FU Fuchsia GR Light grey MA Brown RS Red VE Light green



Black net over a white fabric NEBC



Optional inner decorative Lampshade "Nature graphic"



Optional inner decorative Lampshade "Urban graphic"



Optional inner decorative Lampshade "Flowers graphic"

USSK1002_____ CUSTOMER _____ NOTES _____



Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is estimated based on nominal ratings of 425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the 404.876.1064 sales@illumco.com



USSK1502
Design by Manuel Vivian

Collection of suspended lamps in flame-retardant TREVIRA®CS fabric (100% polyester Glow wire 960 °C), available in several sizes and colors. The fabric can also come in a double-layer version with an exterior black net fabric. A decorative inner lampshade (also printable with customized graphic) is available.

Typology: SUSPENDED

Ratings

- E26 or GX24q-4 or GU24 LED bulbs included
- Downlight and uplight
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120V AC
- Switch mode: on-off
- Steel frame


GU24 LED VERSION

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut LED bulbs

FLE VERSION

- Power supply 120/277V AC

Product code composition

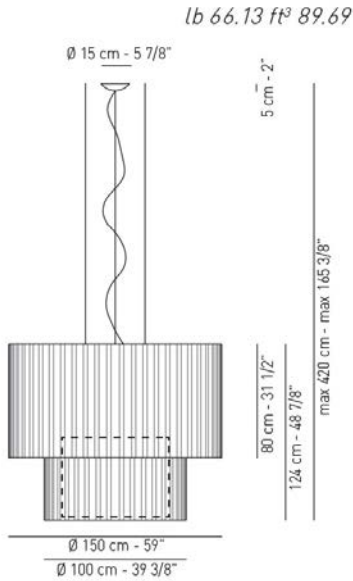

SKIRT / diffuser INCLUDED

Type	Article	Exterior Net	Fabric Colours	Source
UP	SK 150 2 E26	NE black net	BC white	E26 4 x Max 17W LED or 4 x Max 26W fluo
	SK 150 2 FLE	XX no black net	AR orange	FLE GX24q-4 4x42W 120/277VAC
	SK 150 2 LED		AZ light blue BL blue FU fuchsia GR light grey MA brown RS red VE light green	LED GU24 4x15W - included 120VAC - CRI 80 diffused beam - 2700K 6400 lm - 107 lm/W - dimmable ELV TRAILING EDGE PHASE CUT LED

SINGLE FABRIC

Fireproof class I= C1, GB= CRIB 5, D=B1, F= M1, EN= 102/1-2, A 652 / Weight 340 ± 5% gr/m² / Abrasion resistance (Martindale): 40.000 ± 10% rubs / Pilling Grade 5 / Light fastness grade 6

BLACK NET FINISH FABRIC


Fireproof class I= C1, F= M1, D= B1 DIN 4102 / Weight 214 ± 5% gr/m² / Abrasion resistance (Martindale): 30.000 ± 10% rubs / Pilling Grade 5 / Light fastness grade 5



example composition code | US | SK1502LED | NE | VE |

For optional accessories please refer to our pricelist, website or contact our representatives


Available colors



BC White AR Orange AZ Light blue BL Blue FU Fuchsia GR Light grey MA Brown RS Red VE Light green



Black net over a white fabric NEBC



Optional inner decorative Lampshade "Nature graphic"



Optional inner decorative Lampshade "Urban graphic"



Optional inner decorative Lampshade "Flowers graphic"

USSK1502_-----

CUSTOMER _____

NOTES _____



Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the