



UPSKR070
Design by Manuel Vivian

Collection of suspended lamps in flame-retardant TREVIRA®CS fabric (100% polyester Glow wire 960 °C), available in several sizes and colors. The fabric can also come in a double-layer version with an exterior black net fabric.

Typology: CEILING

Ratings

- Downlight and uplight
- Surface installation over holes
- Power supply 120V AC
- Switch mode: on-off
- Steel frame
- Opalescent diffuser

GU24 LED VERSION

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut LED bulbs

FLE VERSION


- Power supply 120/277V AC

Product code composition

SKIRT / diffuser INCLUDED

Type	Article	Exterior Net	Fabric Colours	Source
UP	SKR 070 E26	NE black net	BC white	E26 1 x Max 17W LED or 1 x Max 26W fluo
	SKR 070 FLE	XX no black net	AR orange	FLE GX24q-4 1x42W 120/277Vac
	SKR 070 LED		AZ light blue BL blue FU fuchsia GR light grey MA brown RS red VE light green	LED GU24 1x15W - included 120Vac - CRI 80 diffused beam - 2700K 1600 lm - 107 lm/W

lb 12.12 ft³ 15.18



∅ 70 cm - 27 1/2"

SINGLE FABRIC

Fireproof class I= C1, GB= CRIB 5, D=B1, F= M1, EN= 102/1-2, A 652 / Weight 340 ± 5% gr/m² / Abrasion resistance (Martindale): 40.000 ± 10% rubs / Pilling Grade 5 / Light fastness grade 6

BLACK NET FINISH FABRIC


Fireproof class I= C1, F= M1, D= B1 DIN 4102 / Weight 214 ± 5% gr/m² / Abrasion resistance (Martindale): 30.000 ± 10% rubs / Pilling Grade 5 / Light fastness grade 5



DRY LOCATION

example composition code | **UP** | **SKR070E26** | **XX** | **GR** |

Available colors

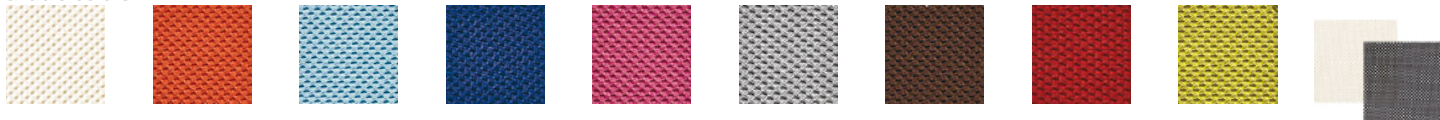

BC
White

AR
Orange

AZ
Light blue

BL
Blue

FU
Fuchsia

GR
Light grey

MA
Brown

RS
Red

VE
Light green

NEBC
Black net over a white fabric

UPSKR070_-----

CUSTOMER _____

NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com



UPSKR100
Design by Manuel Vivian

Collection of ceiling lamps in flame-retardant TREVIRA®CS fabric (100% polyester Glow wire 960 °C), available in several sizes and colors. The fabric can also come in a double-layer version with an exterior black net fabric.

Typology: CEILING

- Ratings**
- E26 or GX24q-4 or GU24 LED bulbs included or Built in **LED** module
 - Downlight
 - Surface installation over holes
 - Power supply 120V AC
 - Switch mode: on-off
 - Steel frame

- GU24 LED VERSION**
- CCT 2700 K, CRI 80
 - Dimmable ELV trailing edge, phase cut LED bulbs


- FLE VERSION**
- Power supply 120/277V AC

Product code composition

SKIRT / diffuser INCLUDED

Type	Article	Exterior Net	Fabric Colours	Source
UP	SKR 100 E26	NE black net	BC white	E26 3 x Max 17W LED or 3 x Max 26W fluo
	SKR 100 FLE	XX no black net	AR orange	FLE GX24q-4 3x42W 120/277VAc
	SKR 100 LED		AZ light blue BL blue FU fuchsia GR light grey MA brown RS red VE light green	LED GU24 3x15W - included 120VAc - CRI 80 diffused beam - 2700K 4800 lm - 107 lm/W

lb 22 ft³ 37.43



SINGLE FABRIC

Fireproof class I= C1, GB= CRIB 5, D=B1, F= M1, EN= 102/1-2, A 652 / Weight 340 ± 5% gr/m² / Abrasion resistance (Martindale): 40.000 ± 10% rubs / Pilling Grade 5 / Light fastness grade 6


BLACK NET FINISH FABRIC

Fireproof class I= C1, F= M1, D= B1 DIN 4102 / Weight 214 ± 5% gr/m² / Abrasion resistance (Martindale): 30.000 ± 10% rubs / Pilling Grade 5 / Light fastness grade 5



example composition code |UP |SKR100E26 |NE |MA |

Available colors

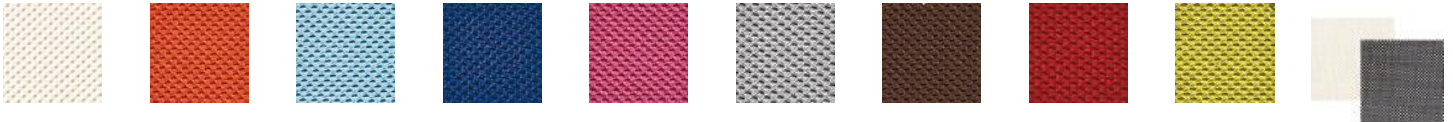

BC White AR Orange AZ Light blue BL Blue FU Fuchsia GR Light grey MA Brown RS Red VE Light green NEBC Black net over a white fabric

UPSKR100_----- CUSTOMER _____ NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com



UPSKR150
Design by Manuel Vivian

Collection of ceiling lamps in flame-retardant TREVIRA@CS fabric (100% polyester Glow wire 960 °C), available in several sizes and colors. The fabric can also come in a double-layer version with an exterior black net fabric.

Typology: CEILING

- Ratings**
- E26 or GX24q-4 or GU24 LED bulbs included or Built in **LED** module
 - Downlight
 - Surface installation over holes
 - Power supply 120V AC
 - Switch mode: on-off
 - Steel frame

- GU24 LED VERSION**
- CCT 2700 K, CRI 80
 - Dimmable ELV trailing edge, phase cut LED bulbs


- FLE VERSION**
- Power supply 120/277V AC

Product code composition

SKIRT / DOUBLE FABRIC / diffuser INCLUDED

Type	Article	Exterior Net	Fabric Colours	Source
UP	SKR 150 E26	NE black net	BC white	E26 4 x Max 17W LED or 4 x Max 26W fluo
	SKR 150 FLE	XX no black net	AR orange	FLE GX24q-4 4x42W 120/277Vac
	SKR 150 LED		AZ light blue BL blue FU fuchsia GR light grey MA brown RS red VE light green	LED GU24 4x15W - included 120Vac - CRI 80 diffused beam - 2700K 6400 lm - 107 lm/W

lb 55.11 ft³ 89.69

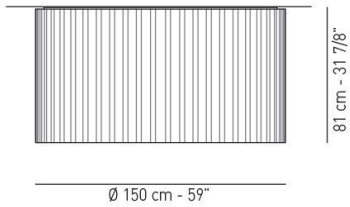

SINGLE FABRIC

Fireproof class I= C1, GB= CRIB 5, D=B1, F= M1, EN= 102/1-2, A 652 / Weight 340 ± 5% gr/m² / Abrasion resistance (Martindale): 40.000 ± 10% rubs / Pilling Grade 5 / Light fastness grade 6

BLACK NET FINISH FABRIC


Fireproof class I= C1, F= M1, D= B1 DIN 4102 / Weight 214 ± 5% gr/m² / Abrasion resistance (Martindale): 30.000 ± 10% rubs / Pilling Grade 5 / Light fastness grade 5



DRY LOCATION

example composition code |UP| SKR150E26 |XX| BC |

Available colors

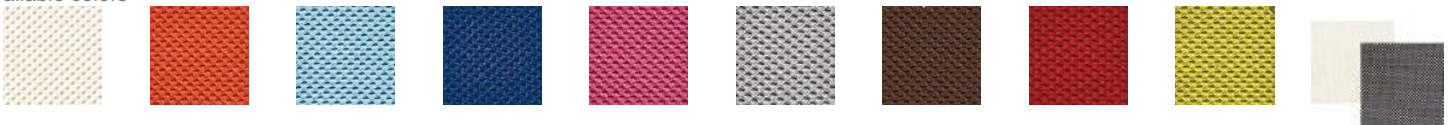

BC White

AR Orange

AZ Light blue

BL Blue

FU Fuchsia

GR Light grey

MA Brown

RS Red

VE Light green

NEBC Black net over a white fabric

UPSKR150_____ CUSTOMER _____ NOTES _____

Luminous flux for all LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

225 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com