



UPUL1090 - recessed
UPUL2090 - recessed
 Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum. Available in several colors and sizes.

Typology: WALL, CEILING LAMP

Ratings

- Built in **LED** module
- CCT 3000 K
- Uplight (towards surface)
- Remote LED driver(s)
- Installs to ceiling or wall (requires recessed strain relief)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

h10cm lb 5.95 ft³ 6.17
 h25cm lb 6.83 ft³ 6.17

Product code composition

U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER INCLUDED


Type	Article	Colours	Version	Source
UP	UL 1 090 LED (h10 cm)	AN anthracite grey	IN recessed canopy	LED 63W - diffused beam 3000K
	UL 2 090 LED (h25 cm)	RU rust brown		

DRY LOCATION CRI90 120/277VAC **LED** 4904 lm 78 lm/W

hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code | **UP** | **UL1090LED** | **RU** | **IN** |

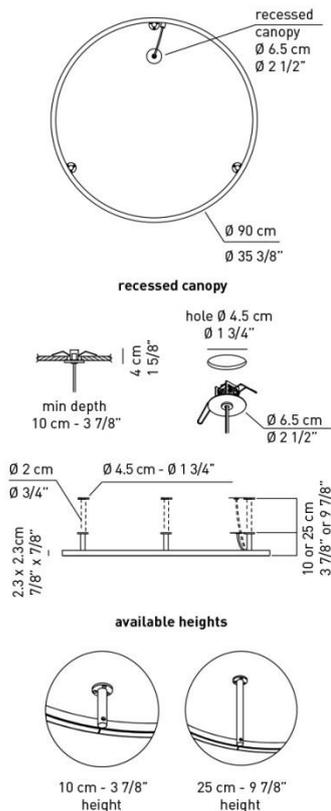

with acoustic panel



Available colors



CUSTOMER _____ NOTES _____
 UPUL _ 090LED _ _ IN _____

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the





UPUL1120 - recessed
UPUL2120 - recessed
 Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum.
 Available in several colors and sizes.

Typology: WALL, CEILING LAMP

Ratings

- Built in **LED** module
- CCT 3000 K
- Uplight (towards surface)
- Remote LED driver(s)
- Installs to ceiling or wall (requires recessed strain relief)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

h10cm lb 7.05 ft³ 10.76
 h25cm lb 7.93 ft³ 10.76

Product code composition

U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER INCLUDED


Type	Article	Colours	Version	Source
UP	UL 1 120 LED (h10 cm)	AN anthracite grey	IN recessed canopy	LED 86W - diffused beam 3000K
	UL 2 120 LED (h25 cm)	RU rust brown		

DRY LOCATION CRI90 120/277VAC **LED** 7354 lm 86 lm/W

hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code | **UP** | **UL2120LED** | **AN** | **IN** |

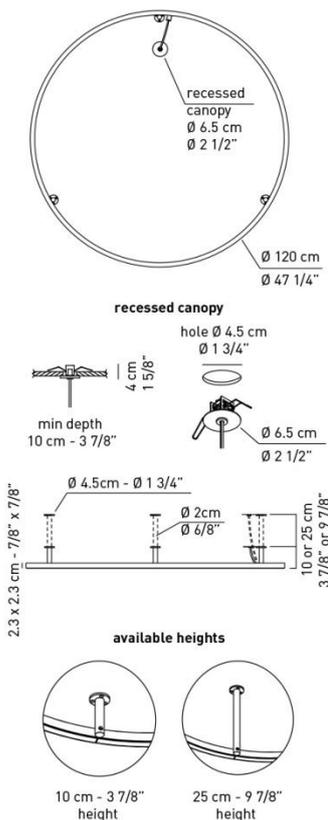

Available colors



CUSTOMER _____ NOTES _____

UPUL _ 120LED _ _ IN

Luminous flux for all built-in LED luminaires is shown at source level.
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the





UPUL1160 - recessed
UPUL2160 - recessed
 Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum. Available in several colors and sizes.

Typology: WALL, CEILING LAMP

Ratings


- Built in **LED** module
- CCT 3000 K
- Uplight (towards surface)
- Remote LED driver(s)
- Installs to ceiling or wall (requires recessed strain relief)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

h10cm lb 11.02 ft³ 20.12
 h25cm lb 11.90 ft³ 20.12



Product code composition

U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER INCLUDED


Type	Article	Colours	Version	Source
UP	UL 1 160 LED (h10 cm)	AN anthracite grey	IN recessed canopy	LED 125W - diffused beam 3000K
	UL 2 160 LED (h25 cm)	RU rust brown		



recessed canopy



available heights



DRY LOCATION CRI90 120/277VAC **LED** 11000 lm 88 lm/W

hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code | **UP** | **UL1160LED** | **RU** | **IN** |

Available colors



AN
Anthracite grey

RU
Rust brown

CUSTOMER _____ NOTES _____

UPUL _ 160LED _ _ IN

Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

illuminations
 425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
 404.876.1064 sales@illumco.com



UPUL1180 - recessed
UPUL2180 - recessed
 Design by Timo Ripatti





Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminium.
 Available in several colours and sizes.
 Available with sound absorbing panel option.

Typology: WALL, CEILING LAMP

Ratings

- Built in **LED** module
- CCT 3000 K or 2700K
- Wallward light (wall), downlight or uplight (ceiling)
- Installs to ceiling or wall (requires recessed strain relief)
- Power supply 120-270Vac
- Switch mode: on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminium profile 23 x 23 mm
- Opalescent diffuser

h10cm lb 12,56 ft³ 21.26
 h25cm lb 13,44 ft³ 21.26



Product code composition

U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER INCLUDED

Type	Article	Colours	Version	Source
UP	UL 1 180 LED (h10 cm)	AN anthracite grey	IN recessed canopy	LED 123W - diffused beam 3000K*, 2700K
	UL 2 180 LED (h25 cm)	RU rust brown		



DRY LOCATION CRI90 120/277Vac



LED 9800 lm* 88 lm/W

hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code **UP** | **UL1180LED** | **RU** | **IN** |

-for optional drivers or dimming technology please refer to our pricelist or contact our representatives

-sound absorbing option upon request- for more information see www.axolight.eu/u-light/u-light-sound-absorbing.pdf

Available colors



AN
Anthracite grey

RU
Rust brown

Sound absorbing option upon request

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

CUSTOMER _____ NOTES _____

UPUL _ 180LED _ _ IN

Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is based on nominal ratings of the LED s
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

